
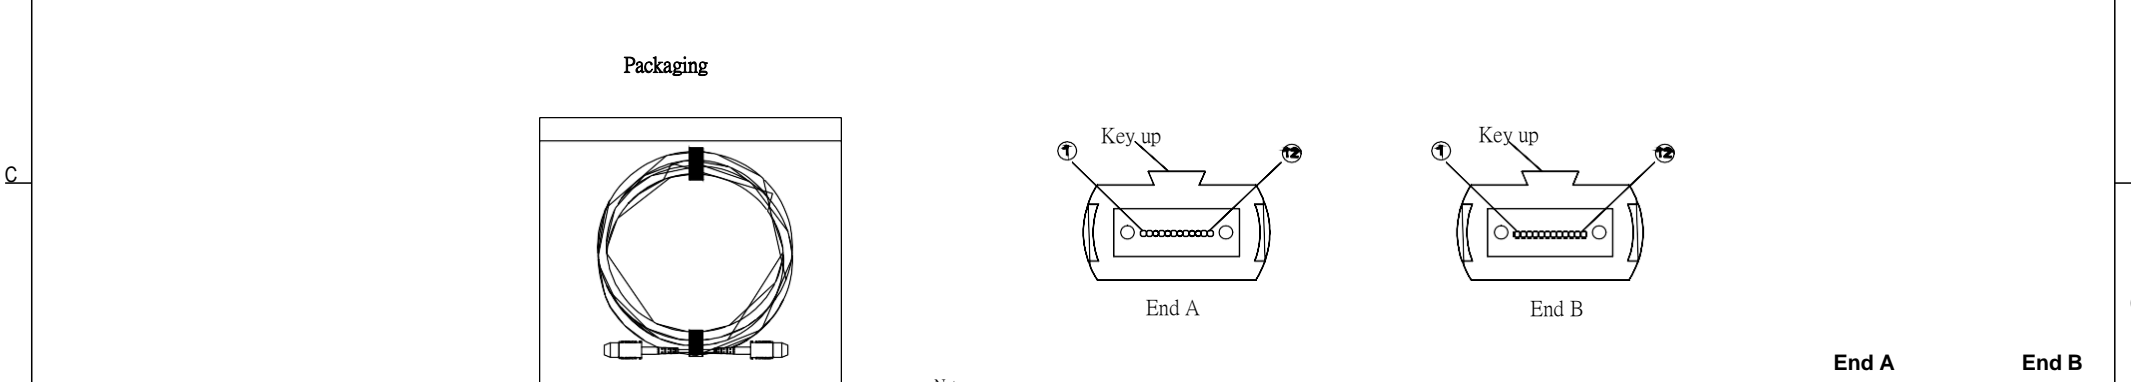


Length tolerance								
Length								
1 < L ≤ 10m	± 100mm							
> 10m	± 1% L							

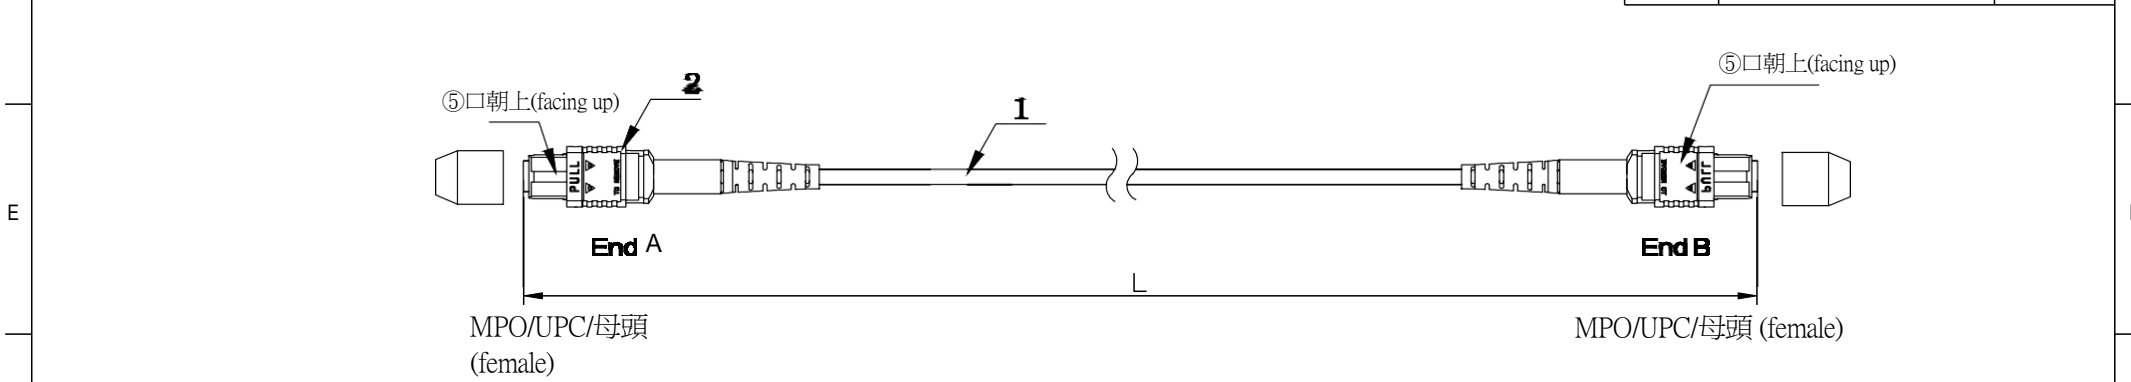

- Notes:
- Fiber type: MM; OM3.
 - Polarity: B polarity - as shown in the table, length according to order requirements.
 - IL < 0.5 dB, RL > 30 dB.
 - Connector types at both ends: MPO / UPC female.
 - MT end face and geometric specifications: Comply with IEC 61300-3-35.
 - Packaging: Use appropriate PE bags, and install additional large bags according to actual requirements.
 - Comply with EU ROHS2.0 standard
 - ELII-EBS0A1 to be printed at the end of the strain relief at both ends

End A	End B
①	①
②	②
③	③
④	④
⑤	⑤
⑥	⑥
⑦	⑦
⑧	⑧
⑨	⑨
⑩	⑩
⑪	⑪
⑫	⑫


■	Ø3.0mm 12C MPO/UPC 母頭 多模 連接器	L
□	Ø3.0 OM3 12 芯 水綠色圓纜	Q'TY
NO.	DESCRIPTION	

GENERAL TOLERANCES UNLESS SPECIFIED		DRAWN BY	CHECKED BY	APPROVED BY	QTY	FINISH	MATERIAL	TITLE	MPO12 300M			ELII		
X ±	-	DEMI	CHARLES	JINYI				PART NO.: ELII-EBS0A1	DWG NO.	-				
XX ±	-													
XXX ±	-													
08/02/2024					SIZE	UNITS								

XXXX ±	XXX° ±													
1	2	3	4	5	6	7	8							

客戶名稱		文件名稱		文件版號	X00	製作日期	2024. 08. 02	第1頁 共1頁
------	--	------	--	------	-----	------	--------------	---------

內標籤(inner tag) ELII PN



Reel label affixing icon

Reels for patch cords longer than 50M

Outer box label:ELII PN




Illustration of carton sealing and label affixing