


DATE :	Jun/03/13'
P/N :	See the table
Dwg No:	A07214
CUST. P/N :	USB3C-AS/1-BS/1
CUSTOMER :	
DESCRIPTION	USB3C-AS/1-BS/1
APPROVE:	

REV.	DATE	DESCRIPTION	BY
1.0	Jun/03/13'	D2852	Eve

## CONFIGURATION

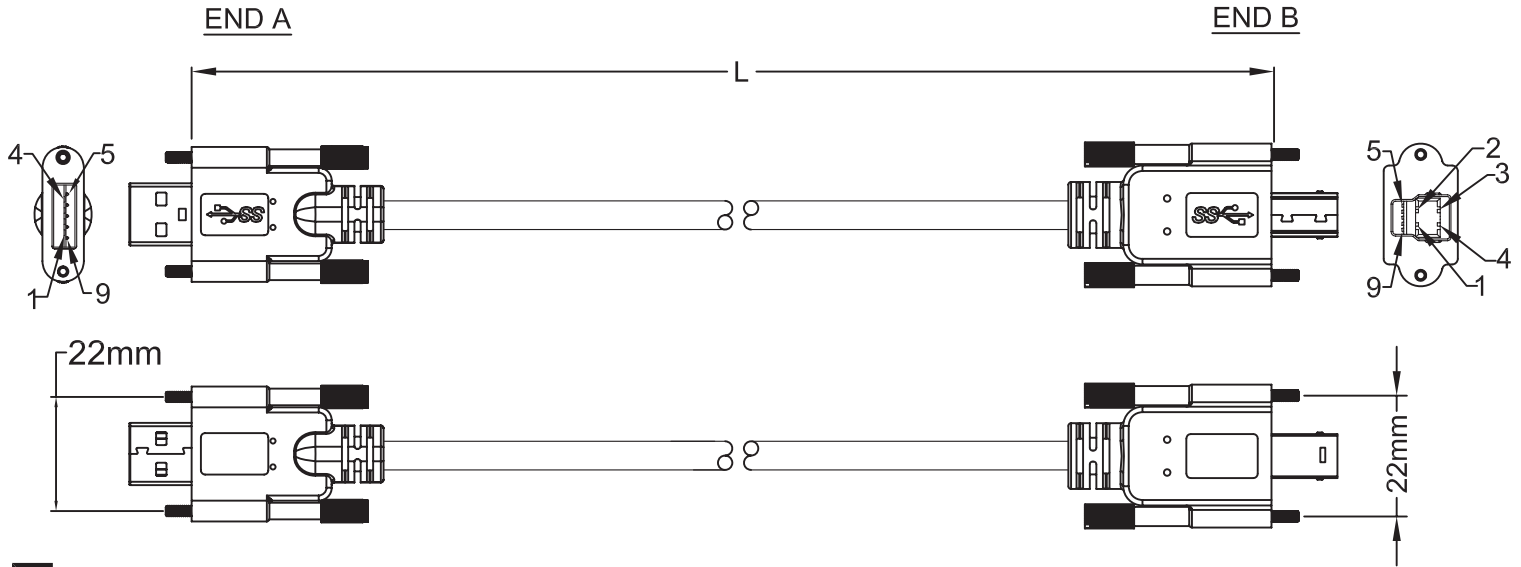

## SPECIFICATION OF MATERIAL

### 1. END A

CONT. PLATING	Gold 15u"	MOLD No.	CMS-USB48	SHIELD'G	-
CONNECTOR TYPE	USB-9MASS15NBU			T. SCREW	Jack Screw M2 Size :4.5x39.00x7.00


### 2. END B

CONT. PLATING	Gold 15u"	MOLD No.	CMS-USB49	SHIELD'G	-
CONNECTOR TYPE	USB-9MBSS15NB			T. SCREW	Jack Screw M2 Size :4.5x39.00x7.00

### 3. WIRES

WIRE GAUGE	28Awg&28Awg&24Awg	LENGTH	L1	SHIELD'G	AB
CONDUCTORS	(1TP+MAE)x2+(1TP+AL)+2C	COLOR	Blue (301U)	UL/CSA	UL2725 (USB3.0)
JACKET MAT'L	PVC	INS. MAT'L	FM-SKIN-PE&FM-PE&SR-PVC	WIRE O.D.	5.5mm

### 4. CONNECTOR PIN OUT

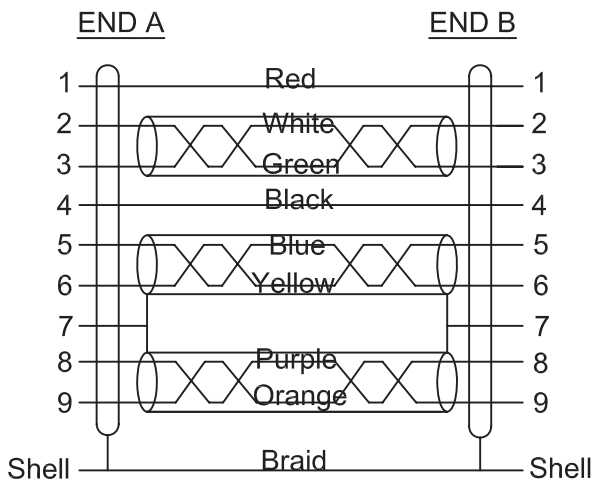

### 5. SPECIAL REQUIREMENTS

- 5.1 Product requirement for Green environment protection:RoHS.
- 5.2 Overmold PVC is 45P Blue (Pantone No.:301U)(RoHS).

#### 5.3 P/N :

P/N	LINE LENGTH	Cut length
B0106478	L=1000±30mm	L1=1000+20-0mm
B0106479	L=2000±30mm	L1=2000+20-0mm
B0106480	L=3000±50mm	L1=3000+30-0mm

\* Standard Product