

Electronic Links International, Inc.

Interconnecting Components and Systems

***Marketing, Engineering, Manufacturing, and Sales of
Electronic Components in Copper and Fiber Optics***

ElectronicLinks
international inc

ELECTRONIC LINKS
INTERNATIONAL, INC.
CATALOG 2026

- INDUSTRIAL AUTOMATION/ROBOTICS
- MEDICAL
- OPTICAL: PLASTIC/GLASS/HIBRID
- AUTOMOTIVE: EV CHARGERS/CABLE ASSEMBLIES
- AVIONICS/MILITARY
- HOME NETWORKING/FTTH
- ARTIFICIAL INTELLIGENCE (AI)

www.electronic-links.com

HEADQUARTERS USA: 59 Court Street, 2nd Floor, Binghamton, NY
13901

OTHER LOCATIONS: - Canada - China - Germany - Italy - Mexico
-Taiwan

Drawings, specs, test reports, available on request



	Electronic Links International, Inc. 59 Court Street - 2nd Floor Binghamton, NY 13901 USA
www.electronic-links.com	Phone US: +1.607.7683340 Phone Italy: +39.348.6578677

HISTORY

Electronic Links International, Inc. was founded in 2002 by an industry executive with more than twenty-five years of experience in engineering, marketing, and sales of electrical components. Our team includes engineers and professionals from major global electronic OEMs, bringing expertise that spans materials science, electrical behavior, and product development.

We apply advanced analytical and scientific tools to deliver optimal design and manufacturing solutions for our components. All products are developed in accordance with the latest international standards and industry advancements.

SCOPE

We design, manufacture, export, and supply electrical connectors and cable assemblies in both copper and fiber-optic technologies, along with a range of complementary electronic components. Our mission is to provide high-quality products promptly, meeting performance requirements while maintaining competitive pricing.

LOCATION

Our world headquarters is located in the United States, with European headquarters in Milan, Italy. Manufacturing facilities operate across the United States, Italy, and Asia, enabling efficient global production and distribution.

Content 1 of 2

- Machine Vision Cables - Page 1
- USB Cable Assemblies - Page 2
- USB 3.1 C AOC Data Only - Page 3
- USB 3.2 Gen 2 Full-Featured AOC Cable - Page 4
- Armored HDMI 2.0 AOC - Page 5
- USB 3.0 A to Micro B Active Optical Cable - Page 6
- M Series Connector - Page 7
- USB 3.0 Waterproof Solution For The Vision Market - Page 8
- USB4.0 Copper Cables (Passive & Active) - Page 9
- Thunderbolt 3 / Active Optical Cable (40 Gb/s) - Page 10
- Thunderbolt 4 (40Gbps) Passive Cable - Page 11
- Thunderbolt 5 (80 to 120 Gbps) Passive EPR Cable - Page 12
- Thunderbolt 4 Active LRD Cable, 40Gbps - Page 13
- DP 1.4 Type C AOC - Page 13 a, b
- Transceiver QSFP28 Active Optical Cables - Page 14
- Transceivers & LC MPO Mating Cable Assemblies - Page 14a
- Transceivers & LC MPO Mating Cable Assemblies - Page 14b
- Video Transmission ApplicationsPage - Page 15
- Artificial Intelligence solutions - Page 15a, b, c, d, e, f
- For Machine Vision Application - Page 16, 16a
- E-Bike Wire Harness - Page 17
- Harness For Automotive - Page 18
- Copper Board and cable Connectors - Page 19
- Rugged ODVA Adapters and Mating Cable Assemblies - Page 20
- Profinet Cable Assemblies - Page 21
- USB 3.0 A to LC AOC Cable Assemblies - Page 22

Content 2 of 2

- FTTP/FTTH/FTTB/FTTD/FTTO Solutions - Page 23
- FTTH Solutions - Page 24
- Fiber Optic Fast Connector - Page 25
- IP 68 Solutions, LC-DX - Page 25a
- Outdoor flat drop cable in pull box - Page 25b
- MIL Connectors and Cable Assemblies - Page 26
- Portable EV Chargers - Page 27
- EV Adapters - Page 28
- Low Pressure Molding Solutions - Page 29
- Direct Attach Cable - Page 30
- Armored Four-In-One 8K Fiber Optic HDMI Cable drum - Page 31
- LC/SC Adapter With Inner Shutter - Page 32
- M12 Cable Assemblies and Mating Connectors -
Page 33a-1, b-1, c1-24, d1-12, e-1
- Armoured 4K HDMI AOC Cable - Page 34a, b
- Armoured 8K HDMI AOC Cable - Page 35a, b
- MIL-DTL-38999 to RJ45 Shell size 15 with logo - Page 36
- SMI Solutions Using Plastic Optical Cable (POF) - Page 37
- Long Haul Cable Solution - Page 38a, b

Editor's Contact:
Francesco Liburdi
Tel. USA: +1 607.761.9952
Tel. Italy: + 39.348.6578677
fliburdi@electronic-links.com

MACHINE VISION CABLES

Electronic Links International, Inc. www.electronic-links.com a company member of the AIA(Association for Advancing Automation) www.automate.org has available all the necessary cable assembling to support this technology. Contacts sales for drawings, specs, samples, quotations. These cables are:

- **USB 3.0 Cables**
- **GigE Cables**
- **IEEE 1394b Cables**
- **Camera Link Cables**
- **CoaXPress Cables**
- **CCD Cables**



In addition, other solutions in copper, glass, and plastic fiber are available.

Electronic Links International, Inc. assumes no responsibility for inaccuracies or omissions in the information contained in this document. Specifications are subject to change without notice. Additional information about Electronic Links International, Inc. is available at www.electronic-links.com

Editor's Contact:
Francesco Liburdi
Tel. USA: +1 607.761.9952
Tel. Italy: + 39.348.6578677
fliburdi@electronic-links.com

USB CABLE ASSEMBLIES



- **USB 2.0 Cable**
- **USB 3.0 Cable**
- **USB C Cable**
- **USB 3.2 Waterproof Cable**

Electronic Links International, Inc. assumes no responsibility for inaccuracies or omissions in the information contained in this document. Specifications are subject to change without notice. Additional information about Electronic Links International, Inc. is available at www.electronic-links.com

Editor's Contact:

Francesco Liburdi

Tel. USA: +1 607.761.9952

Tel. Italy: + 39.348.6578677

fliburdi@electronic-links.com

USB 3.1 C to C AOC Data Only

1. SCDS-3120 series
2. Can support 10 Gbps super speed
3. Meets USB3.1 standard
4. Downward compatible with USB2.0/1.1
5. Hybrid copper and fiber cable
6. From .2 to 15 meters



Electronic Links International, Inc. assumes no responsibility for inaccuracies or omissions in the information contained in this document. Specifications are subject to change without notice. Additional information about Electronic Links International, Inc. is available at www.electronic-links.com

Editor's Contact:
Francesco Liburdi
Tel. USA: +1 607.761.9952
Tel. Italy: + 39.348.6578677
fliburdi@electronic-links.com

USB 3.2 Gen 2 Full-Featured AOC Cable

(With DP and ALT mode)

1. SCFC-3420 series
2. Support DP 4 lanes, 8K@30Hz, video transmission
3. support USB 3.1 Gen 2 10Gbps data transmission
4. Support backward compatible with USB 2.0/1.1
5. Support PD 60W(20V 3A) power delivery
6. Support customized lengths from 1m, 2m, 3m, 5m, 7.5m, 8m, 10m and 15m
7. Support 2-lane DP1.4&USB3.2 10Gbps



Electronic Links International, Inc. assumes no responsibility for inaccuracies or omissions in the information contained in this document. Specifications are subject to change without notice. Additional information about Electronic Links International, Inc. is available at www.electronic-links.com

Editor's Contact:
Francesco Liburdi
Tel. USA: +1 607.761.9952
Tel. Italy: + 39.348.6578677
fliburdi@electronic-links.com

Armored HDMI 2.0 AOC

1. SAHC series
2. Support 4K@60Hz, 18Gbps
3. Max to 100m long
4. Cable OD: 5.8mm
5. TPU jacket, 304 stainless steel reinforced cable
6. with accessories of water proof head and mobile reel are available for your choice
7. Length (M): From 5 to 100 meters



Electronic Links International, Inc. assumes no responsibility for inaccuracies or omissions in the information contained in this document. Specifications are subject to change without notice. Additional information about Electronic Links International, Inc. is available at www.electronic-links.com

Editor's Contact:
Francesco Liburdi
Tel. USA: +1 607.761.9952
Tel. Italy: + 39.348.6578677
fliburdi@electronic-links.com

USB 3.0 A to Micro B Active Optical Cable

1. PVC Jacket / SUMB series
2. HF wire / SSMB series
3. Do not downward compatible with USB 2.0
4. Support 10 Gbps
5. Operates with USB 3.0 super speed host controllers
6. Supports all major operating systems including Windows, Mac OS, and Linux
7. From 5 up to 20 meters



Electronic Links International, Inc. assumes no responsibility for inaccuracies or omissions in the information contained in this document. Specifications are subject to change without notice. Additional information about Electronic Links International, Inc. is available at www.electronic-links.com

Editor's Contact:

Francesco Liburdi

Tel. USA: +1 607.761.9952

Tel. Italy: + 39.348.6578677

fliburdi@electronic-links.com

M Series Connector

FEATURES

- **Waterproof M5 / M8 / M12 Male & Female Connector.**
- **Environment protection IP67.**
- **Compliant with the RoHS Directive.**
- **Vibration intensity 10 to 500 Hz and 0.35 mm or 50 m/s² (5g)**
- **Current capacity up to 16 A**
- **Mechanical shock 61076-2-XXX is 490 m/s² (50g)**

APPLICATIONS

- **Heavy machineries**
- **Industrial automation**
- **Sensors**
- **Electric auto bike**
- **IP CCTV camera**
- **Military communications**
- **Industrial Computer (IPC)**



Electronic Links International, Inc. assumes no responsibility for inaccuracies or omissions in the information contained in this document. Specifications are subject to change without notice. Additional information about Electronic Links International, Inc. is available at www.electronic-links.com

Electronic Links International, Inc.
59 Court Street - 2nd Floor
Binghamton, NY 13901 USA


US Phone: + 1.607.768.3340
Italy Phone: + 39.348.6578677
www.electronic-links.com

USB 3.0 WATERPROOF SOLUTION FOR THE VISION MARKET



Up to 5 meters in lengths with two cable solutions:

- High flex cable were the system is in need to move
- Static cable for were the cable is fix

- #1: USB 3.0 waterproof Std.A/female to microB cable

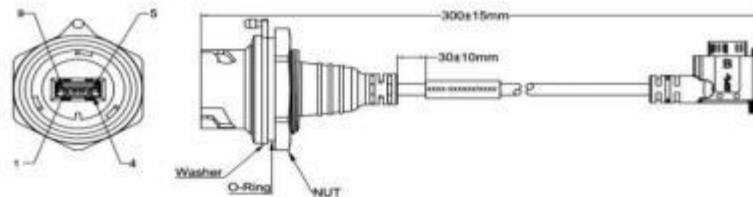

- #2: USB 3.0 Std.A to Waterproof Std.A cable

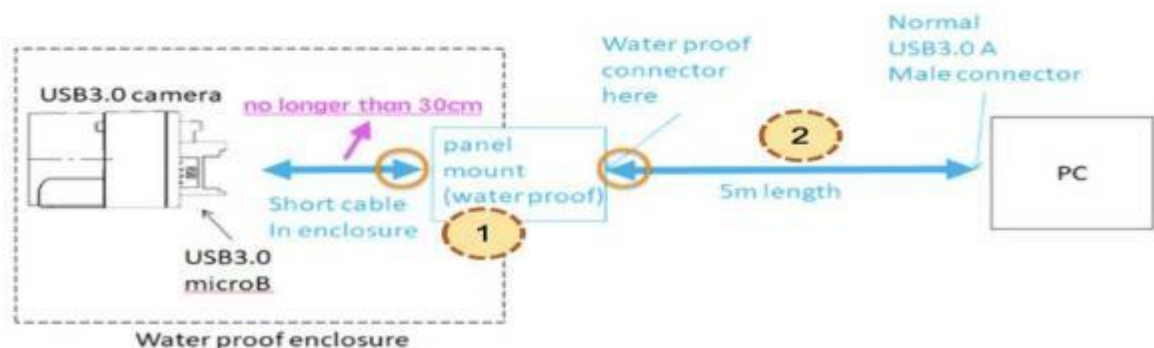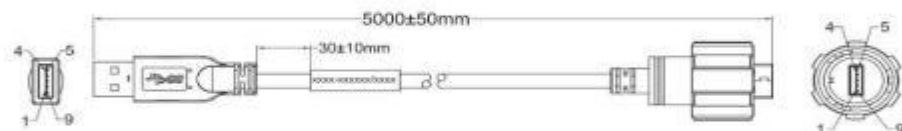

Editor's Contact:
Francesco Liburdi
Tel. USA: +1 607.761.9952
Tel. Italy: + 39.348.6578677
fliburdi@electronic-links.com

(USB4.0 COPPER CABLES (PASSIVE & ACTIVE))

- Bandwidth: 40Gbps – 0.8M, 1M, 2M, 3M
- Bandwidth: 20Gbps – 5M
- Wire type: Coax
- Connectors type: USB C
- The passive type up to 1 meter has no IC integrated
- The active type up to 5 meters has the IC integrated
- Support USB4 Gen/2Gen3 full duplex high speed transmission
- Support DP1.4, 4 lane Display Port video signal transmission, DP alternative mode



Electronic Links International, Inc. assumes no responsibility for inaccuracies or omissions in the information contained in this document. Specifications are subject to change without notice. Additional information about Electronic Links International, Inc. is available at www.electronic-links.com

Editor's Contact:
Francesco Liburdi
Tel. USA: +1 607.761.9952
Tel. Italy: + 39.348.6578677
fliburdi@electronic-links.com

Thunderbolt 3 / ACTIVE OPTICAL CABLE (40 Gb/s)

GENERAL INFORMATION

- **USB Type C connector**
- **RoHS 3**
- **Recommends using only Thunderbolt 3 optical cables with macOS**
- **Does not provide bus power**

ORDERING PART NUMBERS

- | | |
|------------------|--|
| ● TB3-005 | Thunderbolt 3 USB-C Optical Cable, 5 meters |
| ● TB3-010 | Thunderbolt 3 USB-C Optical Cable, 10 meters |
| ● TB3-015 | Thunderbolt 3 USB-C Optical Cable, 15 meters |
| ● TB3-025 | Thunderbolt 3 USB-CO Optical Cable, 25 meters |
| ● TB3-050 | Thunderbolt 3 USB-C ptical Cable, 50 meters |



Note: Thunderbolt and Thunderbolt logo area trademark of Intel Corp. U.S. and/or other countries.
macOS is a trademark of Apple, Inc. registered in the U.S. and other countries.

Electronic Links International, Inc. assumes no responsibility for inaccuracies or omissions in the information contained in this document. Specifications are subject to change without notice. Additional information about Electronic Links International, Inc. is available at www.electronic-links.com

Editor's Contact:
Francesco Liburdi
Tel. USA: +1 607.761.9952
Tel. Italy: + 39.348.6578677
fliburdi@electronic-links.com

Thunderbolt™ 4 (40Gbps) Passive Cable 0.5M, 0.7M, 0.8M, 1.0M

General Specification

- **Length: 0.5-meter / 0.7-meter / 0.8-meter / 1.0-meter**
- **Connector: Type-C connector or compatible**
- **Color: Black**
- **P/N: TPALLL-EB2**



Note: Thunderbolt and Thunderbolt logo area trademark of Intel Corp. U.S. and/or other countries.
macOS is a trademark of Apple, Inc. registered in the U.S. and other countries.

Electronic Links International, Inc. assumes no responsibility for inaccuracies or omissions in the information contained in this document. Specifications are subject to change without notice. Additional information about Electronic Links International, Inc. is available at www.electronic-links.com

Editor's Contact:
Francesco Liburdi
Tel. USA: +1 607.761.9952
Tel. Italy: + 39.348.6578677
fliburdi@electronic-links.com

Thunderbolt™ 5 (80 to 120 Gbps) Passive EPR Cable

General Specification:

- **Length: 0.3 meter/0.5 meter/0.8 meter/ 1.0 meter**
- **Connector: Type C or compatible**
- **Color: Black/white**
- **P/N: TPCLL-EHQ**

Thunderbolt Gen2/Gen3/Gen4/Gen5 full duplex operation

The Thunderbolt 5 passive cable provides a robust solution designed to meet the performance, power delivery, and quality required of certified Thunderbolt. Fully interoperable with Thunderbolt 5 PC and Devices,

Thunderbolt 5 will deliver 80Gbps of bi-directional bandwidth, and bandwidth boost it provides up to 120Gbps for the best display experience.



Note: Thunderbolt and Thunderbolt logo area trademark of Intel Corp. U.S. and/or other countries.
macOS is a trademark of Apple, Inc. registered in the U.S. and other countries.

Electronic Links International, Inc. assumes no responsibility for inaccuracies or omissions in the information contained in this document. Specifications are subject to change without notice. Additional information about Electronic Links International, Inc. is available at www.electronic-links.com

Editor's Contact:
Francesco Liburdi
Tel. USA: +1 607.761.9952
Tel. Italy: + 39.348.6578677
fliburdi@electronic-links.com

Thunderbolt™4 Active LRD Cable, 40Gbps

General Specification

Length: 1.5 meter / 2.0 meter.
Connector: Type-C connector or compatible.
Color: Black / White
P/N: TAALLL-E60

Thunderbolt: 2-channel Thunderbolt Gen2 or Thunderbolt Gen3 full duplex operation.
DP: DP1.4, 4-lane DisplayPort video signal transmission, DP alternate mode (MFDP).
USB: 1-CH USB2.0 half duplex operation.
1- CH USB3.2 Gen1 or Gen2 full duplex operation.
2- 2-CH USB3.2Gen2 full duplex operation.

USB4 Gen2/Gne3 full duplex operation.



Note: Thunderbolt and Thunderbolt logo area trademark of Intel Corp. U.S. and/or other countries.
macOS is a trademark of Apple, Inc. registered in the U.S. and other countries.

Electronic Links International, Inc. assumes no responsibility for inaccuracies or omissions in the information contained in this document. Specifications are subject to change without notice. Additional information about Electronic Links International, Inc. is available at www.electronic-links.com

DP 1.4 Type C AOC Manual




The ELII DP 1.4 AOC is our new Audio/Video cable, designed for high-definition signal transmission using optical fiber. This cable not only supports lengths exceeding 100 meters but also ensures a more stable signal quality with no EMI interference. It boasts an impressive 8.1Gbps bandwidth per channel and supports 8K resolution, fully compliant with the DP1.4 standard. This mature and competitive solution is perfect for the high-speed data transmission market. The optical fiber cable is compatible with computers featuring USB Type-C interfaces, outdoor displays, LED signboards on streets and in stadiums, and security systems that require audio and video signal transfer.

Electronic Links International, Inc.

59 Court Street – 2nd Floor

Binghamton, NY 13901 USA

www.electronic-links.com

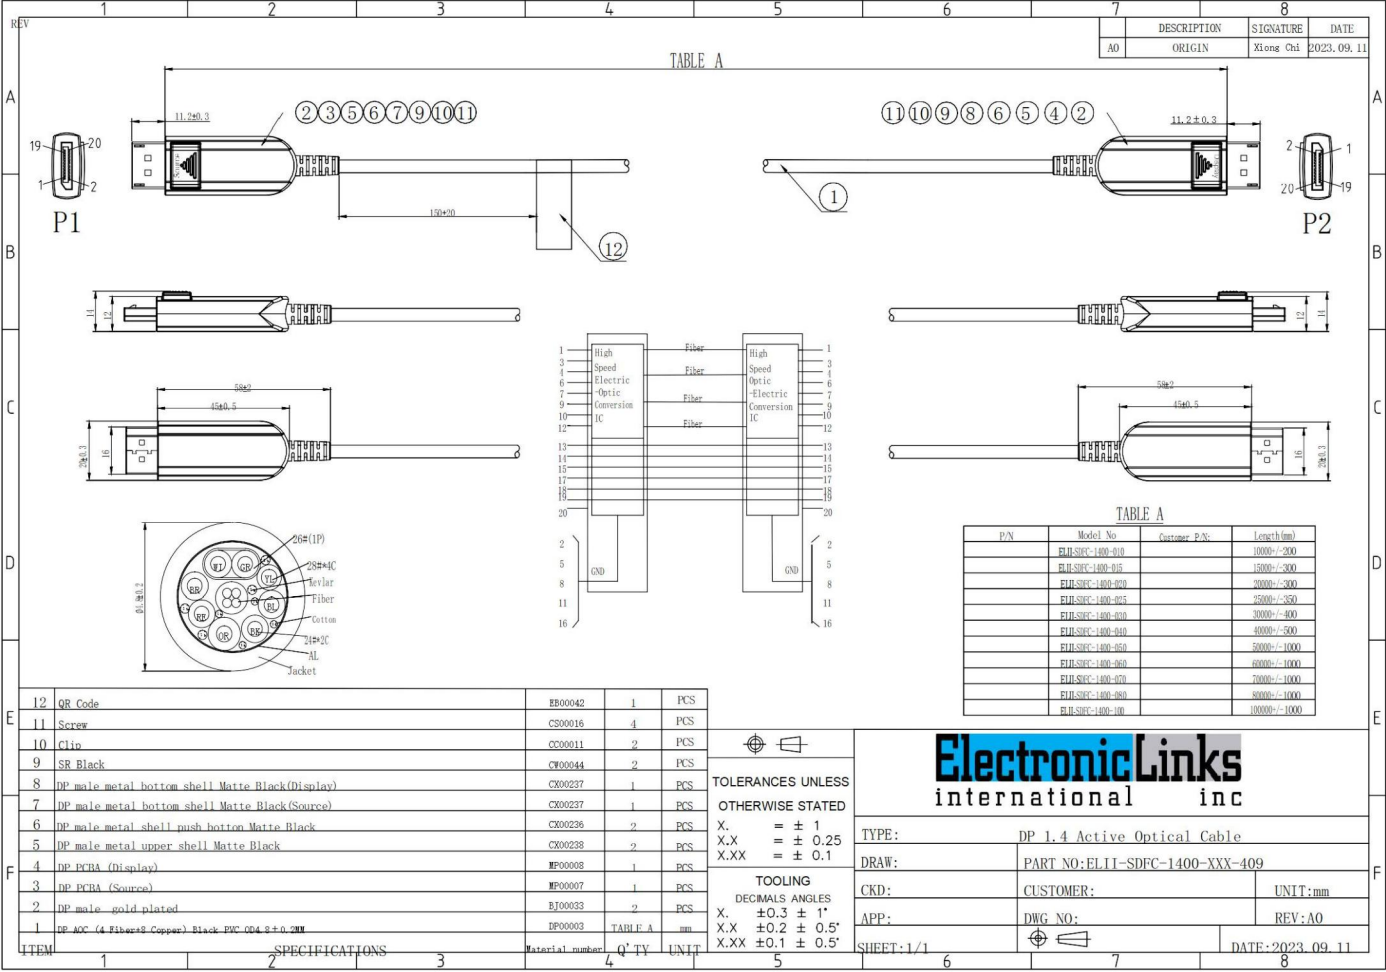

Editor's Contact:

Francesco Liburdi

Tel. USA: +1 607.761.9952

Tel. Italy: + 39.348.6578677

fliburdi@electronic-links.com

TRANSCEIVER QSFP28 Active Optical Cable 100 Gbps

- Four Full-Duplex Lanes
- Data rate up to 25.78125 Gbps/lane
- Hot-Pluggable Interface
- Low latency, low weight, and low power consumption
- Compliant with SFF-8636, SFF-8679, SFF-8662, SFF- 8663, IEEE802.3bm
- EMI performance match FCC class B
- BER better than 10 minus 12
- Storage, Network, Server, NIC switch
- Low cost AOC solution
- Lengths from 3 meters to 30 meters

Part number	Lengths in meters
EDC003	3 meters
EDC005	5 meters
EDC010	10 meters
EDC020	20 meters
EDC030	30 meters



Electronic Links International, Inc. assumes no responsibility for inaccuracies or omissions in the information contained in this document. Specifications are subject to change without notice. Additional information about Electronic Links International, Inc. is available at www.electronic-links.com

Editor's Contact:

Francesco Liburdi

Tel. USA: +1 607.761.9952

Tel. Italy: + 39.348.6578677

fliburdi@electronic-links.com

TRANSCEIVERS & LC MPO MATING CABLE ASSEMBLIES

SFP - SFP+ - XFP - QSFP+ - 25G - 100G - AOC - DAC



A family of transceivers and mating cable assemblies. Ranging from 10G SFP+ to 20 Km, to 25 G to 10Km, to 25 G up to 40 Km, to 10G copper RJ45 optical transceiver and more. With LC duplex connectors and MPO connectors.

AOC	With AOC cable and One Side with LC duplex connectors
SFP+_SFP+	10G,LSZH,1m-150m,OM2
SFP+_SFP+	10G,LSZH,1m-150m,OM3
SFP28_SFP28	25G,LSZH,1m-150m,OM3-150
QSFP+_QSFP+	40G,LSZH,1m-150m,OM3-150
QSFP+_4*SFP+	40G_4*10G,LSZH,1m-150m,OM3-150,分支 0.5m
QSFP28_QSFP28	100G,LSZH,1m-150m,OM3-150
QSFP28_4*SFP28	100G_4*25G,LSZH,1m-150m,OM3-300,分支 0.5m
QSFP56_QSFP56	200G,LSZH,1m-150m,OM3-300
QSFP56_2*QSFP56	200G_2*100G,LSZH,1m,OM3-300,分支 0.5m
QSFP-DD_QSFP-DD	400G,LSZH,1m-150m,OM3-300
OSFP_OSFP	400G,LSZH,1m-150m,
OSFP_2*QSFP56	400G_2*200G,LSZH,1m-150m,
QSFP-DD_QSFP-DD	800G,LSZH,1m-150m,
OSFP_OSFP	800G,LSZH,1m-150m,
OSFP_2*OSFP	800G_2*400G,LSZH,1m-150m,

TRANSCEIVERS & LC, MPO MATING CABLE ASSEMBLIES (continuing)

AOC	With MPO connectors
QSFP28-100G-PSM4	100G QSFP28 PSM4 10KM (1310 MPO)
QSFP112-400G-SR4	4*106G QSFP SR4 850nm 60M (MPO12 APC)
OSFP112-400G-SR4	4*106G OSFP SR4 850nm 60M (MPO12 APC)
QSFP-DD-800G-SR8	8*106G QSFP-DD SR8 850nm 60M (MPO16 APC)
OSFP112-800G-SR8	8*106G OSFP SR8 850nm 60M (2*MPO12 APC)



Electronic Links International, Inc. assumes no responsibility for inaccuracies or omissions in the information contained in this document. Specifications are subject to change without notice. Additional information about Electronic Links International, Inc. is available at www.electronic-links.com

Editor's Contact:
Francesco Liburdi
Tel. USA: +1 607.761.9952
Tel. Italy: + 39.348.6578677
fliburdi@electronic-links.com

VIDEO TRANSMISSION APPLICATIONS

40 G for 40 Km with LC- Duplex connectors

40GBASE-ER4 QSFP+1310nm 40km LC DOM Optical Transceiver Module for SMF LC-Duplex fiber connector, with maximum 40 km fiber optic connector.



40Km 40G



LC-Duplex to 40 Kms

Transceiver PN:ELII-95.240240-200 QSFP+ Singlemode Duplex, 40G, 40km,CWDM4, LC interface **LC-Duplex cable** PN:ELLI-97.550901-xxx LC/UPC-LC/UPC-SM-DX-Φ2.0mm-G652D-LSZH-xxxm- Yellow

Electronic Links International, Inc. assumes no responsibility for inaccuracies or omissions in the information contained in this document. Specifications are subject to change without notice. Additional information about Electronic Links International, Inc. is available at www.electronic-links.com

Editor's Contact:
Francesco Liburdi
Tel. USA: +1 607.761.9952
Tel. Italy: + 39.348.6578677
fliburdi@electronic-links.com

VIDEO TRANSMISSION APPLICATIONS



**Introducing A Family Of
Products Specifically Designed
For Artificial Intelligence.**

They are:

- Patchcables
- Transceivers
- AOC, DAC
- MPO/MTP trunk cables
- MPO-LC Fanout cables
- MTP-LC Cassette/Module
- MPO/MTP Rackmount

Electronic Links International, Inc. assumes no responsibility for inaccuracies or omissions in the information contained in this document. Specifications are subject to change without notice. Additional information about Electronic Links International, Inc. is available at www.electronic-links.com

MPO Optical Patch Cord

Features

- MPO connector complied with IEC-61754-7
- A quick-to-deploy
- Scalable solution
- High compatibility, flexibility and system performance
- Lower installation cost

Applications

- SAN (Storage Area Network) data center LAN
- LAN/SAN switch equipment distribution area (EDA)
- Emerging 40G and 100G protocol




Performance Specifications


MPO Connector	Standard SM MT Ferrule		Low Loss SM MT Ferrule		Standard MM MT Ferrule	Low Loss MM MT Ferrule
Polish	APC	PC	APC	PC	PC	PC
Insertion Loss (dB)	0.70	0.70	0.35	0.35	0.50	0.35
Return Loss (dB)	60	45	60	45	20	20
Exchangeability (dB)	≤ 0.3					
Tensile Strength (N)	≥ 66					
Operating Temperature (°C)	-40 ~ +85					
Storage Temperature (°C)	-40 ~ +80					

MPO Communication Marks Division

Polarity A: Straight Through



Polarity B: Cross



Polarity C: Cross Pair



Ordering Information

TO						
Connector Type	Jacket Color	Fiber Type	Fiber Count	Cable Length	Cable Type	Polarity
1=MPO/APC-Female 2=MPO/UPC-Female 3=MPO/APC-Male 4=MPO/UPC-Male 5=FC/APC 6=FC/UPC 7=SC/APC 8=SC/UPC 9=LC/APC 0=LC/UPC T=ST S=Specify	1=Yellow 2=Orange 3=Aqua 4=Magenta 5=Violet 6=Red 7=White 8=Brown 9=Blue B=Black S=Specify	1=SM 9/125 G652D 2=SM 9/125 G657A 3=MM 62.5/125 OM1 4=MM 50/125 OM2 5=MM 50/125 OM3 6=MM 50/125 OM4 7=MM 50/125 OM5	1=8 2=12 3=24 4=48 5=72 6=96 7=144 S=Specify	1=0.5m 2=1.0m 3=1.5m 4=2.0m S=Specify	1=Bare-Ribbon 2=Oval 3=Round S=Specify	A=Polarity A B=Polarity B C=Polarity C

ElectronicLinks
international inc

E-mail: sales@electronic-links.com
Website : www.electronic-links.com

OSFP112 400G SR4 Optical transceiver for(dual MPO)flat top solution

Product Specifications

This product is a 400Gb/s OSFP112 400G SR4 optical module designed for 100m optical communication applications. The module converts 4 channels of 100Gb/s (PAM4) electrical input data to 4 channels of parallel optical signals, each capable of 100Gb/s operation for an aggregate data rate of 400Gb/s.

On the receiver side, the module converts 4 channels of parallel optical signals of 100Gb/s each channel for an aggregate data rate of 400Gb/s into 4 channels of 100Gb/s (PAM4) electrical output data.

An optical fiber cable with an single MPO-12 connector can be plugged into the OSFP112 400G SR4 module receptacle. Host FEC is required to support up to 100m fiber transmission.

Designed For Artificial Intelligence

Features

- Up to 106.25 Gbps data rate per channel by PAM4 modulation
- Support 400GAUI-4 electrical interface
- Integrated 850nm VCSEL array and PD array
- DDM function implemented
- Hot-pluggable
- Single +3.3V power supply

Standards

- Compliant to OSFP MSA 5.0
- Compliant with CMIS 4.0
- 4x106.25Gb/s electrical interface (400GAUI-4)
- Maximum power consumption 9W
- Single +3.3V power supply
- Case temperature range: 0 ~ +70°C
- RoHS 2.0 complaint

Applications

- Data centers and Cloud Networks

Electronic Links international inc

12. Optical interface

The MPO-12 connectors for OSFP112 400G SR4.

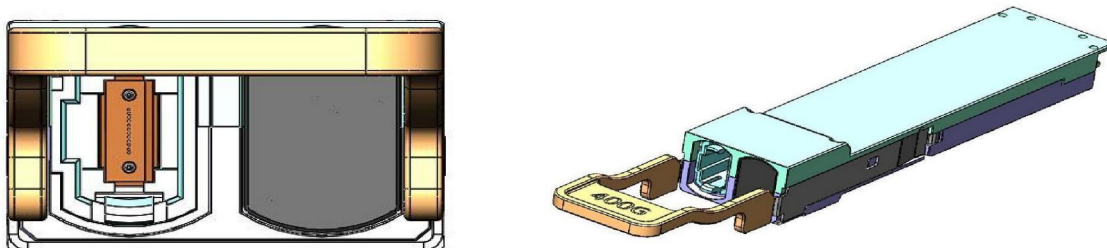


Figure 3. Optical lane assignments

13. Mechanical Specifications


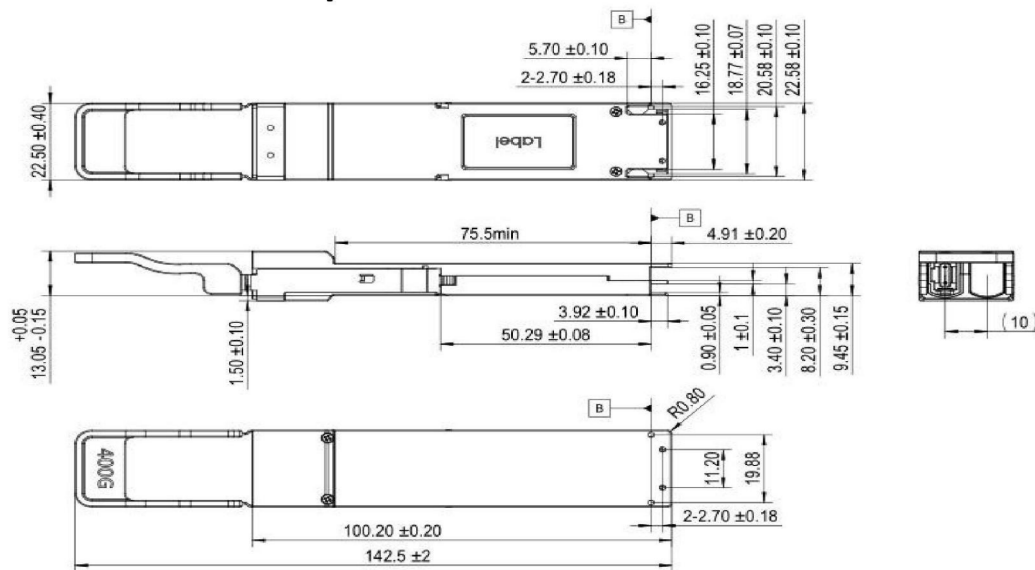


Figure 4. Mechanical Dimensions



OSFP800 800G 2xSR4 Optical transceiver

Product Specifications

Designed For Artificial Intelligence

This product is a 800Gb/s OSFP800 2xSR4 optical module designed for 100m optical communication applications. The module converts 8 channels of 100Gb/s (PAM4) electrical input data to 8 channels of parallel optical signals, each capable of 100Gb/s operation for an aggregate data rate of 800Gb/s.

On the receiver side, the module converts 8 channels of parallel optical signals of 100Gb/s each channel for an aggregate data rate of 800Gb/s into 8 channels of 100Gb/s (PAM4) electrical output data.

An optical fiber cable with dual MPO-12 connector can be plugged into the OSFP 800G SR8 module receptacle. Host FEC is required to support up to 100m fiber transmission.

Features

- Up to 106.25 Gbps data rate per channel by PAM4 modulation
- Support 800GAUI-8 electrical interface
- Integrated 850nm VCSEL array and PD array
- DDM function implemented
- Hot-pluggable
- Single +3.3V power supply

Standards

- Compliant to OSFP MSA 5.0
- Compliant with CMIS 5.1
- 8x106.25Gb/s electrical interface (800GAUI-8)
- Maximum power consumption 14W
- Single +3.3V power supply
- Case temperature range: 0 ~ +70°C
- RoHS 2.0 complaint

Applications

- Data centers and Cloud Networks

12. Optical interface

The dual MPO-12 connectors for OSFP800 2xSR4.

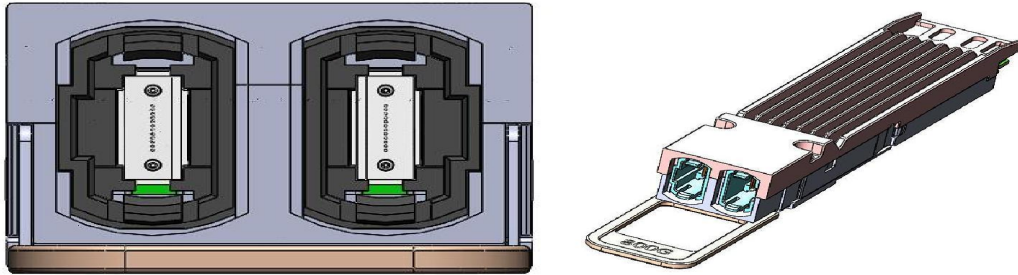


Figure 3. Optical lane assignments

13. Mechanical Specifications


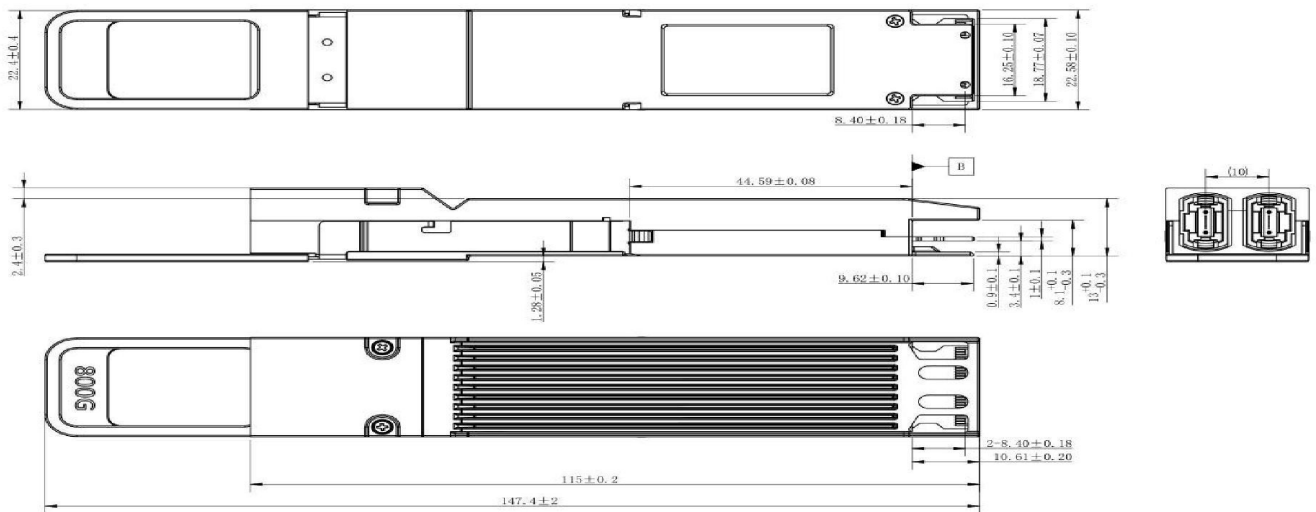


Figure 4. Mechanical Dimensions





Editor's Contact:

Francesco Liburdi

Tel. USA: +1.607.761.9952

Tel. Italy: +39.348.6578677

fliburdi@electronic-links.com

40G CoaXPress OVER FIBER CABLE ASSY, 300 M

ELII, a member of the www.automate.org, is introducing an optical cable+transceiver capable to deliver 40G solution for the machine vision market. The cable+transceiver CoaXPress is registered by the JIIA (Japan Industrial Imaging Association), www.jiia.org. A PlugFest is scheduled. The solution is based on a 40GBase-SR4 QSFP+850nm transceiver. The length of the cable is 300 meters. **A 400 meters solution is also available upon customer request.**

The cable assembly it meet the IEC 61300-3-35 and the RoHS 2.0 standard. The transceiver is compliant with SFF-8436 and SFF-8679, as well as the IEEE802.3ba.

We are planning on demonstrating the 300 meters solution connected to a compatible grabber board and camera in October 2024 during the Vision show in Stuttgart, Germany and in December 2024 in Yokohama, Japan. As well as at Photonics West in February 2025 in San Francisco, and Automate in May 2025 in Detroit.



40G MPO Cable Assy, 300 meters



40G MPO Transceiver



Euresys Grabber board

QSFP+ = Quad SFP+ = 4 x SFP+
SFP module = Small Form-factor Pluggable module

- Compact network interface module used for data communication, for example Ethernet
- Widely used in data centers

Part Numbers:

Transceiver P/N: ELII-EBS0A0 QSFP+ Multimode, 40G, 300m, 850nm, MPO interface

Transceiver P/N: ELII-EBS0A0 QSFP+ Multimode, 40G, 300m, 850nm, MTP interface (The same)

MPO to MPO Cable P/N: ELII-EBS0A1 MPO/UPC/F to MPO/UPC/F (female with B polarity, 300 meters)

Electronic Links International, Inc. assumes no responsibility for inaccuracies or omissions in the information contained in this document. Specifications are subject to change without notice. Additional information about Electronic Links International, Inc. is available at www.electronic-links.com

	Electronic Links International, Inc. 59 Court Street – 2nd Floor Binghamton, NY 13901 USA
www.electronic-links.com	Phone US: +1.607.7683340 Phone Italy: +39.348.6578677 Phone Taiwan: +886 0983 112860

QSFP28, 100 G FOR VISION MARKET SOLUTIONS



100G CoaXPress-over-Fiber frame grabber

One QSFP28 port compliant with 100 Gbps optical modules
 Four-connection 25 Gbps CoaXPress-over-Fiber
 12,500 MB/s camera bandwidth
 8 GB of on-board memory
 PCIe 4.0 (Gen 4) x8 bus: 13,500 MB/s bus bandwidth
 Feature-rich set of 20 digital I/O lines
 Extensive camera control functions
 Memento Event Logging Tool

QSFP28 SR4

NOTE: Using an OM3 cable the max length could be 70 meters, for better stability 50 meters should be the max.
 Using an OM4 cable the max length could be 100 meters, for better stability 80 meters should be the max.

Editor's Contact:
Francesco Liburdi
Tel. USA: +1 607.761.9952
Tel. Italy: + 39.348.6578677
fliburdi@electronic-links.com

E-Bike Wire Harness

- In tube controller harness
- Hub motor harness
- Light control harness
- PAS harness




Electronic Links International, Inc. assumes no responsibility for inaccuracies or omissions in the information contained in this document. Specifications are subject to change without notice. Additional information about Electronic Links International, Inc. is available at www.electronic-links.com

Editor's Contact:
Francesco Liburdi
Tel. USA: +1 607.761.9952
Tel. Italy: + 39.348.6578677
fliburdi@electronic-links.com

HARNESS FOR AUTOMOTIVE

- Crank/Cam Harness
- Front Light, Indicator Lights
- Ignition Harness
- Speed Sensor
- Rear View Monitor
- Power Source
- ADAS Wire Harness
- Rear Light, Indicator Light

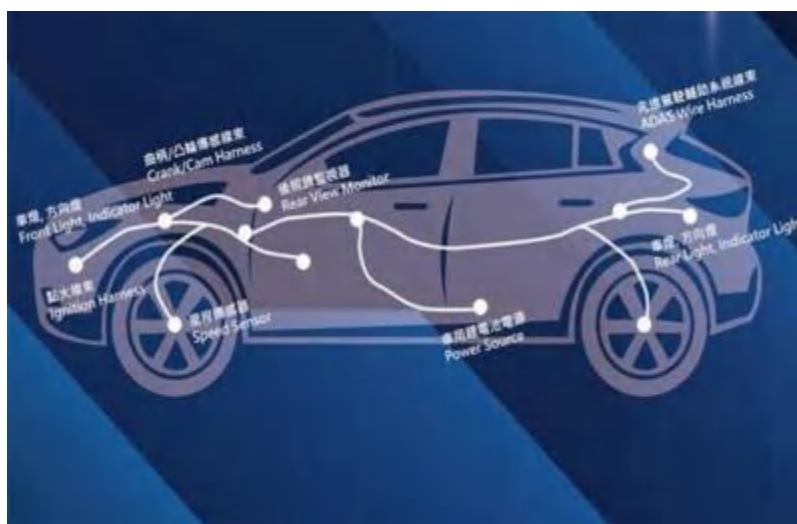

Electronic Links International, Inc. assumes no responsibility for inaccuracies or omissions in the information contained in this document. Specifications are subject to change without notice. Additional information about Electronic Links International, Inc. is available at www.electronic-links.com

Editor's Contact:
Francesco Liburdi
Tel. USA: +1 607.761.9952
Tel. Italy: + 39.348.6578677
fliburdi@electronic-links.com

COPPER BOARD AND CABLE CONNECTORS

- STANDARD USB
- MINI USB
- IEEE1394
- D SUBS
- DVI
- SATA
- RJ45
- COAX
- POGO PINS
- WIRE TO BOARD
- BOARD TO BOARD
- PIN HEADERS
- PIN SOCKETS
- SIM CARDS
- HDMI
- M8/M12
- FPC
- PCMCIA



Electronic Links International, Inc. assumes no responsibility for inaccuracies or omissions in the information contained in this document. Specifications are subject to change without notice. Additional information about Electronic Links International, Inc. is available at www.electronic-links.com

Editor's Contact:
Francesco Liburdi
Tel. USA: +1 607.761.9952
Tel. Italy: + 39.348.6578677
fliburdi@electronic-links.com

Rugged Optical ODVA Adapters and Mating Cable Assemblies




Rugged ODVA adapter and mating cable assemblies (IP67) designed specifically for harsh environmental applications.

Electronic Links International, Inc. assumes no responsibility for inaccuracies or omissions in the information contained in this document. Specifications are subject to change without notice. Additional information about Electronic Links International, Inc. is available at www.electronic-links.com

Editor's Contact:
Francesco Liburdi
Tel. USA: +1 607.761.9952
Tel. Italy: + 39.348.6578677
fliburdi@electronic-links.com

PROFINET CABLE ASSEMBLIES

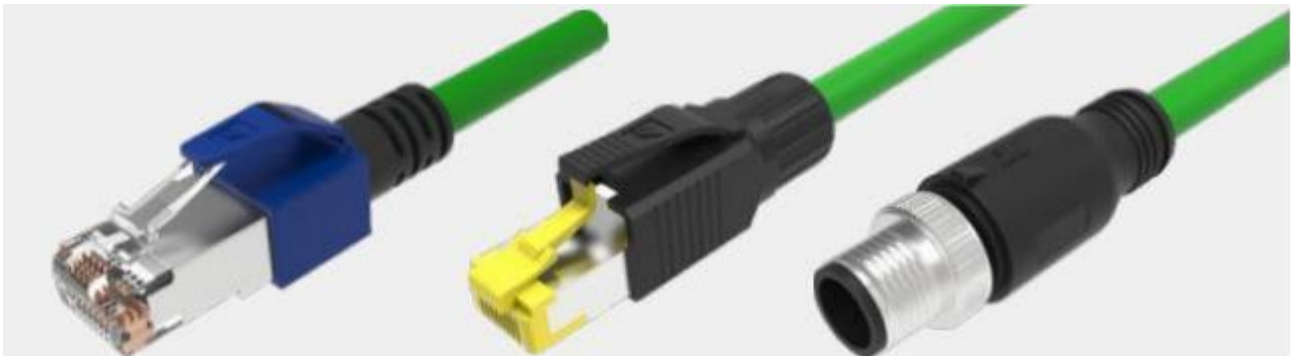

Applications:

Designed for PROFINET protocol, used in a wide range of industrial Ethernet applications. It directly connects two electronic devices and instruments, and can be used in EtherCAT and Ethernet / IP.suitable for indoor fixed applications or occasional mobile. Features

- ◆ The flame retardant performance of the cable meet IEC60332-1
- ◆ Has excellent anti external electromagnetic interference ability
- ◆ Wear resistance, oil resistance, better performance of PUR sheath
- ◆ Long service life
- ◆ Flexible use and easy replacement of equipment
- ◆ A variety of lengths and sheath options are available

Electronic Links International, Inc. assumes no responsibility for inaccuracies or omissions in the information contained in this document. Specifications are subject to change without notice. Additional information about Electronic Links International, Inc. is available at www.electronic-links.com



Electronic Links International, Inc.
59 Court Street - 2nd Floor
Binghamton, NY 13901 USA

US Phone: + 1.607.768.3340
Italy Phone: + 39.348.6578677
www.electronic-links.com

USB3.0 TO LC AOC

Electronic Links International, Inc. is introducing a family of USB 3.0 A to LC AOC cable assemblies. Supports **5Gbps** super-speed up to **300mmax.**



For samples, quote, additional information contact sales@electronic-links.com

Editor's Contact:

Francesco Liburdi

Tel. USA: +1 607.761.9952

Tel. Italy: + 39.348.6578677

fliburdi@electronic-links.com

www.electronic-links.com

USA - New York

CHINA - Ningbo

TAIWAN - Taipei

ITALY – Milan

- FTTP (fiber-to-the-premises)
- FTTH (fiber-to-the-home)
- FTTB (fiber-to-the-building, -business, or -basement)
- FTTD can mean two different things:(fiber-to-the-desktop or -desk)
- FTTO (fiber-to-the-office)



Electronic Links International, Inc. assumes no responsibility for inaccuracies or omissions in the information contained in this document. Specifications are subject to change without notice. Additional information about Electronic Links International, Inc. is available at www.electronic-links.com

Electronic Links international inc

Electronic Links International, Inc.
59 Court Street - 2nd Floor
Binghamton, NY 13901 USA

US Phone: + 1.607. 768.3340
Italy Phone: + 39.348.6578677
www.electronic-links.com

FTTH SOLUTIONS

We offer a complete range of components for a complete FTTH installation. Contact sales@electronic-links.com for samples, quotations, and more inf.



SAMPLES OF PRODUCTS OFFERINGS:

- Pre-terminated ports
- Rack mounted PLC splitters
- Insertion ABS box module
- Cassette PLC splitters
- Block less mini fiber PLC splitters
- Fiber optic fast connectors
- Fiber optic path cords
- Armored fiber optic patch cords
- MPO patch cords
- Fiber optic adapters
- Fiber optic splice closures
- Fiber optic distribution boxes
- Fiber optic wall sockets
- 8/16 ports FTTH
- PLC splitters
- SC Adapters
- & more



New Release

SC PRE-POLISHED

ElectronicLinks
international inc

www.electronic-links.com

Fiber Optic Fast Connector



SC APC/UPC, Pre-polished



@Precision metal V- groove

✓ High quality Zirconia ferrules

✓ For 2.0x3.0mm, 2.0x5.0mm cable

IP 68 SOLUTIONS: LC-DX



Editor's Contact:


Francesco Liburdi

Tel. USA: +1 607.761.9952

Tel. Italy: + 39.348.6578677

fliburdi@electronic-links.com

Outdoor Flat Drop Cable in the pull box: FTTH/FTTX

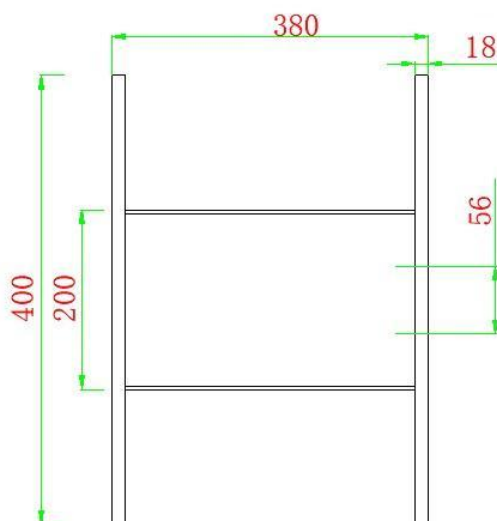

Description

Fiber Cable Pull box 2000FT

PN Number: ELII-CPB-2000F

Features

- Cable can be 3.0mm, 5.0mm 4.5*8.1mm 4.5*9.8mm
- Can be connector in the both end(SC APC, Hardened SC APC, MINI SC)
- Max Length: 3000FT

Application

FTTH / FTTX – Indoor & outdoor drops

Single and multi-dwelling units

FTTP and campus networks

Rural broadband

DAS / FTTA

Electronic Links International, Inc. assumes no responsibility for inaccuracies or omissions in the information contained in this document. Specifications are subject to change without notice. Additional information about Electronic Links International, Inc. is available at www.electronic-links.com

Editor's Contact:

Francesco Liburdi

US Phone: +1 607 768 3340

Italy Phone: +39 348 657 8677

fliburdi@electronic-links.com

MIL-DTL-38999, MIL-C-26482, MIL-C-5015, MIL-C-83513 CONNECTORS AND CABLE ASSEMBLIES

IP68 Micro Circular Connectors MIL-DTL-38999 High Reliability Meet the US military standard: MIL-DTL-38999 III series

- Quick tri-start thread coupling with anti-decoupling mechanism
- Small size, lightweight and high density
- EMI/RFI shielding
- Withstand strong vibration
- Removable crimp contact with scoop-proof design
- Withstanding high strength vibration under high temperature, and applied in harsh environment like wind, sand, moist etc..

Contact www.electronic-links.com



Electronic Links International, Inc. assumes no responsibility for inaccuracies or omissions in the information contained in this document. Specifications are subject to change without notice. Additional information about Electronic Links International, Inc. is available at www.electronic-links.com

Editor's Contact:
 Francesco Liburdi
 Tel. USA: +1 607.761.9952
 Tel. Italy: + 39.348.6578677
fliburdi@electronic-links.com

PORTABLE EV CHARGERS

	EZD-POR-001-IE035		Power: 3.5kw Current: 16A, Single Phase Voltage: 230V±15%
	EZD-POR-001-IE007	Cable length: 5 meters Material: TPU With Screen, Connector: Type 1 & Type 2 Charging time can be reserved Different Wall Plug optional	Power: 7.4kw Current: 32A, Single Phase Voltage: 230V±15%
	EZD-POR-001-IE011	RCD: Type A 30mA AC Packing size: 420 x 80 x 420 mm/3.5KG	Power: 11kw Current: 16A, Three Phase Voltage: 400V±15%
	EZD-POR-001-IE022	507 x 354 x 432 mm/5pcs/21KG	Power: 22kw Current: 32A, Three Phase Voltage: 400V±15%



- In Stock
- Charge Your Car At Home Or Anywhere
- All You Need Is A Power Outlet
- Available In Four Different Wattage Ratings
- Approval By European And North America Agencies
- Contact: Sales@ www.electronic-links.com For More Information.

Electronic Links International, Inc. assumes no responsibility for inaccuracies or omissions in the information contained in this document. Specifications are subject to change without notice. Additional information about Electronic Links International, Inc. is available at www.electronic-links.com

EV ADAPTERS

- 28

Editor's Contact:
Francesco Liburdi
Tel. USA: +1 607.761.9952
Tel. Italy: + 39.348.6578677
fliburdi@electronic-links.com


Low Pressure Molding Solutions (LPM)



Low Pressure Injection Molding 3 Steps



Traditional Potting steps

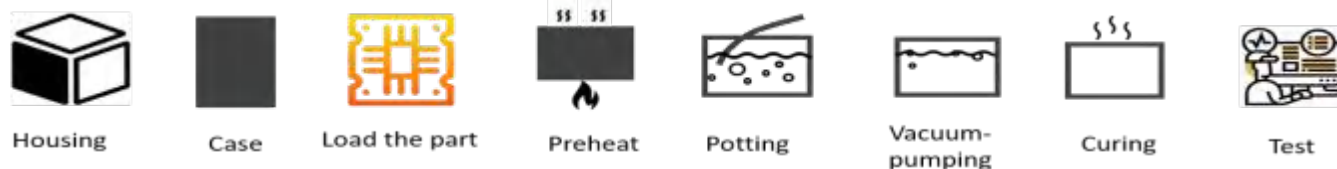

APPLICATIONS

- IPC Industry- Industrial control- PCB encapsulation -Cable connector- Industrial Equipment Industry
Proximity switch - Cable connector - Coil -Motor- - Automotive Industry- TPMS - Sensor - Power socket -
Circuit board - Motor -Meter

Electronic Links International, Inc. assumes no responsibility for inaccuracies or omissions in the information contained in this document. Specifications are subject to change without notice. Additional information about Electronic Links International, Inc. is available at www.electronic-links.com

	Electronic Links International, Inc. 59 Court Street – 2nd Floor Binghamton, NY 13901 USA
www.electronic-links.com	Phone US: +1.607.7683340 Phone Italy: +39.348.6578677 Phone Taiwan: +886 983 112860

Direct Attach Cable

Series	Product	Photo	Length (M)	Data Rate
Direct Attach Cable	10G SFP+ DAC		Up to 5M (common: 1, 2, 3)	10Gbps
	25G SFP28 DAC		Up to 5M (common: 1, 2, 3)	25Gbps
	100G QSFP28 DAC		Up to 5M (common: 1, 2, 3)	100Gbps
	200G QSFP56 DAC		Up to 3M (common: 1, 2, 3)	200Gbps
	400G QSFP-DD28 DAC		Up to 3M (common: 1, 2, 3)	400Gbps
	800G QSFP-DD112 DAC		Up to 2.5M (common: 1.5)	800Gbps
	800G OSFP112 DAC		Up to 2.5M (common: 1.5)	800Gbps
	1.6T OSFP DAC		Up to 1.0M	1.6Tbps

APPLICATION: From small to large data centers
 Contacts sales@electronic-links.com

Brief Introduction

P/N: ELII-FPHD-K2104-XXX (to 300 meters)
OEM & ODM available

This Armored Four-In-One 8K Fiber Optic HDMI Cable drum is a game-changer for long distance UHD 8K HDMI 2.1 signal transmission, especially for:

- Live events organizers
- Rental service providers
- Video producers
- Other applications where high density HDMI cables are required.



Editor's Contact:

Francesco Liburdi

Tel. USA: +1 607.761.9952

Tel. Italy: + 39.348.6578677


Tel. Taiwan: + 886 9083 112860

fliburdi@electronic-links.com

LC/SC ADAPTER WITH INNER SHUTTER

LC/SC with inner shutter adapters for high density data center solutions. LC Quad version key benefits:

1. Dust- and laser-free protection
2. No plastic caps—greener and faster to use
3. Saves time and cost
4. Meets IEC & Telcordia GR-326 standards
5. Available Customization

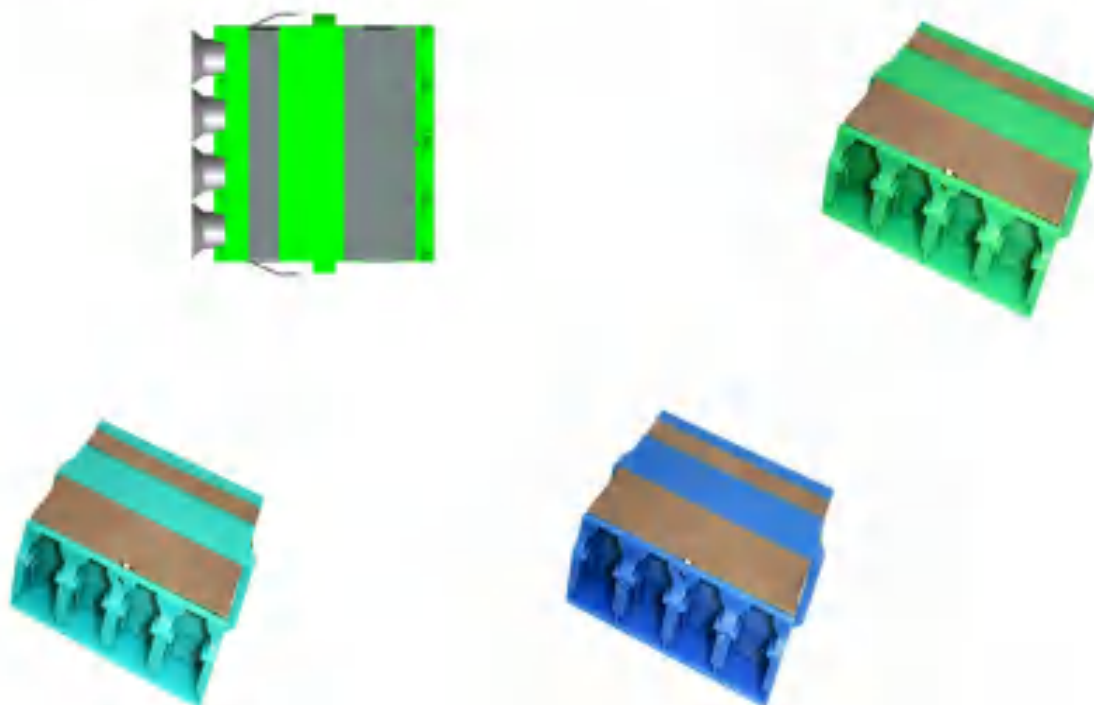

Electronic Links International, Inc. assumes no responsibility for inaccuracies or omissions in the information contained in this document. Specifications are subject to change without notice. Additional information about Electronic Links International, Inc. is available at www.electronic-links.com

M12 A-Code 8 Pin Male to RJ45 Male Spiral Industrial Cable Assemblies



Key Features

- ✧ Design for industrial Ethernet and harsh environments.
- ✧ Retractable, curly with firm coil retention & excellent memory.
- ✧ Halogen-Free PUR jacket for chemical and abrasion resistance.
- ✧ Coiled cable has a useful extension range of approximately 3 times the retracted length of cable.
- ✧ Up to 10 millions of extension / retraction cycles without sacrificing electrical performance.

Cable Diagram




Straight Cable(A): 15cm

Coiled OD(B): 28mm


Retracted Length of Coiled Portion(C): 0.3m ~ 0.75m

Cable OD(D): 7.2mm

Retraction



Extension



Extends or Retracts **3** times

Note:

Repeated extension beyond this upper limit length may result in permanent loss of coil memory.





Extensive Variants for M12 A-Code 8 Pin Spiral Industrial Cable Assemblies

P/N	Product Image	Connector-1	Connector-2	Sheath
ELII-5040063-XXX		M12 A-Code 8 Pin Male	M12 A-Code 8 Pin Male	Halogen-Free PUR
ELII-5040064-XXX		M12 A-Code 8 Pin Male	M12 A-Code 8 Pin Female	Halogen-Free PUR
ELII-5040065-XXX		M12 A-Code 8 Pin Male	RJ45 Male with dual screw	Halogen-Free PUR
ELII-5040066-XXX		M12 A-Code 8 Pin Male	RJ45 Female with dual screw	Halogen-Free PUR
ELII-5040067-XXX		M12 A-Code 8 Pin Female	RJ45 Male with dual screw	Halogen-Free PUR
ELII-5040068-XXX		M12 A-Code 8 Pin Male	RJ45 Male	Halogen-Free PUR
ELII-5040069-XXX		M12 A-Code 8 Pin Male	RJ45 Female	Halogen-Free PUR
ELII-5040070-XXX		M12 A-Code 8 Pin Female	RJ45 Male	Halogen-Free PUR
www.electronic-links.com		sales@electronic-links.com		

Overview

- M12 Male A to M12 Male A PUR Cable
- Head A: IP66K, IP67; Head B: IP66K, IP67
- Cable: SF/UTP 4*[26AWG(30/0.08±0.008BC)+Non-woven fabric]+PP PORE+AL/MYLAR+BRAID(16*9/0.10TC)+Non-woven fabric OD:Ø7.2±0.2MM PUR JACKET.

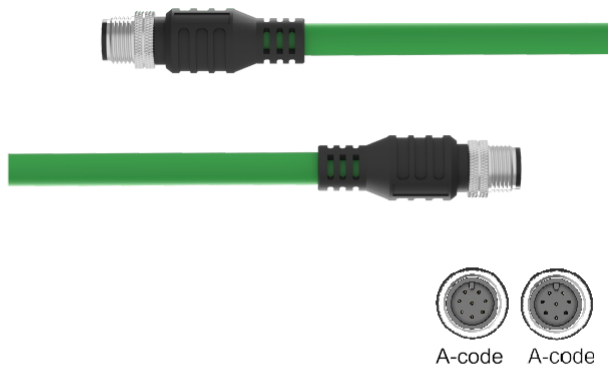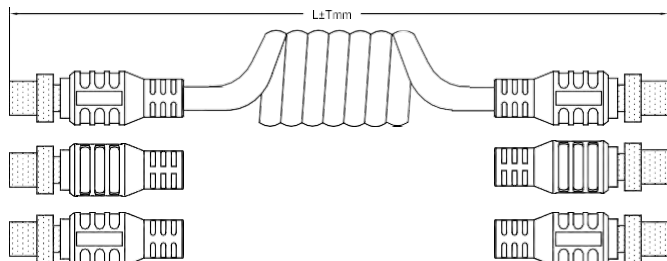

Technical data

Side A

Head A: Connection	M12
Head A: Angle cable outlet	0°
Head A: Gender	Male
Head A: Coding	A
Head A: No. of poles	8
Head A: LED	No
Head A: Width across flats	SW13
Head A: Tightening torque	0.6 Nm
Head A: Knurled nut material	Zinc-pressure die casting, surface Ni
Head A: Body color	Black
Labeling sleeve side A	Yes
O-Ring:	N/A

Side B

Head B: Connection	M12
Head B: Angle cable outlet	0°
Head B: Gender	Male
Head B: Coding	A
Head B: No. of poles	8
Head B: LED	No
Head B: Width across flats	SW13
Head B: Tightening torque	0.6 Nm
Head B: Knurled nut material	Zinc-pressure die casting, surface Ni
Head B: Body color	Black
Labeling sleeve side B	Yes
O-Ring:	N/A

Cables

Shielded	Yes
Conductor structure	30 × 0.08 mm
AWG	26
External sheath: Material	PUR
External sheath: Color	/
Cable diameter	7.2±0.2mm
Wire cross section	40.7mm ²

Electrical data

Operating voltage	max.60VDC
Nominal voltage	300 V
Contact resistance	max. 30 mOhm
Operating current per contact	max. 2 A

Mechanical data

Head A: Degree of protection	IP66K, IP67
Head B: Degree of protection	IP66K, IP67
Bending radius (mobile)	min.15 x outer diameter
Bending radius (fixed)	min.8 x outer diameter
Torsion supported	

Environmental conditions

Temperature range (mobile)	-25°C+70°C
Temperature range (fixed)	-25°C+80°C
Cable: Temperature range (fixed)	-40°C+80°C
Dragchain capable	Yes
Head A: Chemical resistance	No
Head A: Flame resistance	HB (UL 94)
Head A: Oil resistance	ASTM 1 oil, mineral oils, limited to hydraulic oils
Head A: Acid and alkali resistant	No

Technical data

Environmental conditions

Head A: Pollution degree	3
Head B: Chemical resistance	No
Head B: Flame resistance	HB (UL94)
Head B: Pollution degree	3


Environmental conditions

Cable: Silicone-free	Yes
----------------------	-----

Side A

Technical drawing


Coding

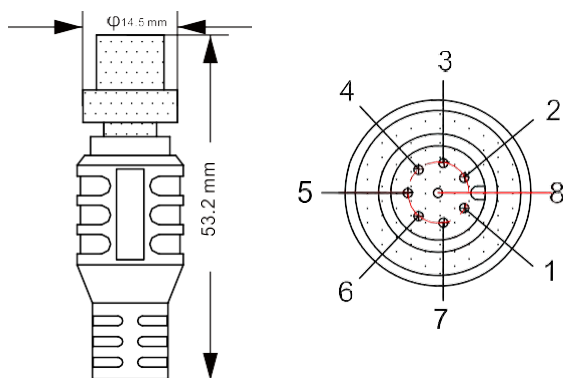

Side B

Technical drawing

Coding

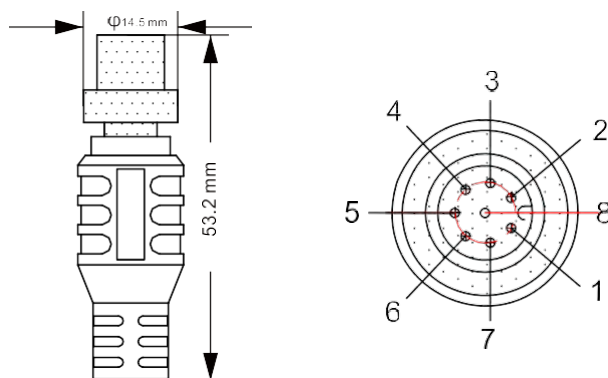


Connection diagram


SIDE A

SIDE B

1	—	1	WHITE/ORANGE
2	—	2	ORANGE
3	—	3	WHITE/GREEN
4	—	4	GREEN
5	—	5	WHITE/BROWN
6	—	6	BROWN
7	—	7	WHITE/BLUE
8	—	8	BLUE
S	—	S	SHIELDED

Sectional view

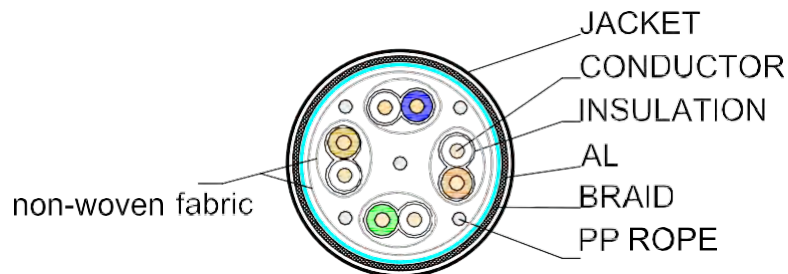

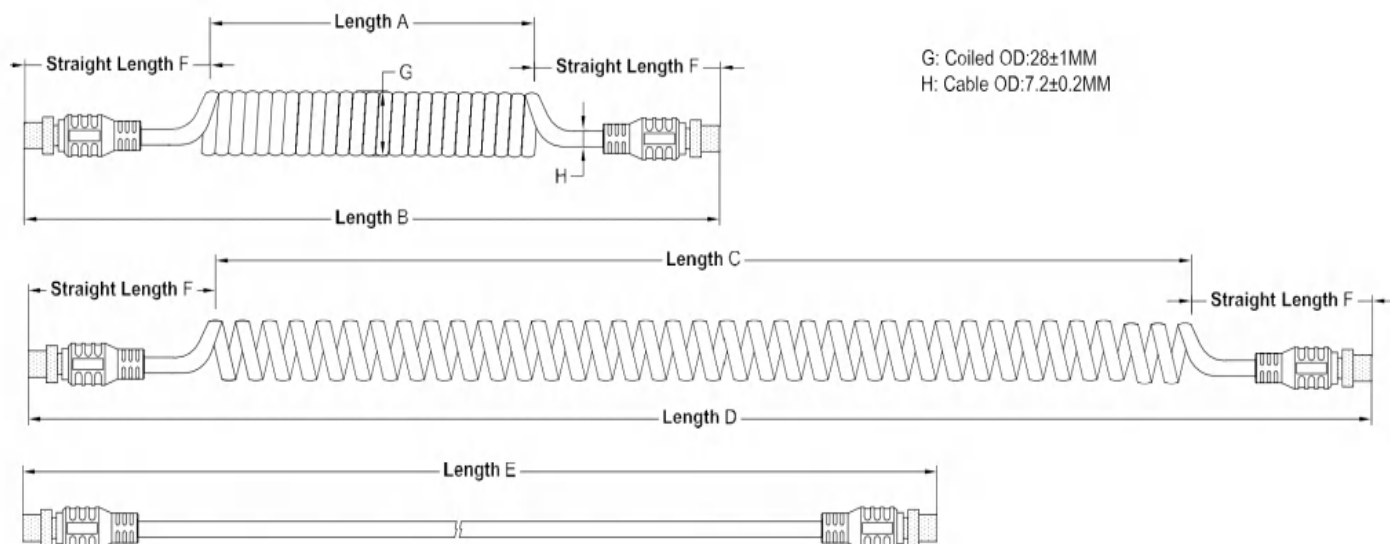

NOTED: Coiled cable has a useful extension range of approximately 3 times the retracted length of cable. Repeated extension beyond this upper limit length may result in permanent loss of coil memory.

Straight Cable before coiled Length E	Length A	Length B	Length C	Length D	Length F
3.076M ^{+35MM} _{-30MM}	0.3M	0.6M ^{+35MM} _{-15MM}	0.9M	1.2M ^{+35MM} _{-20MM}	0.15M
4.926M ^{+35MM} _{-30MM}	0.5M	0.8M ^{+35MM} _{-15MM}	1.5M	1.8M ^{+35MM} _{-20MM}	0.15M
7.239M±50MM	0.75M	1.05M ^{+35MM} _{-20MM}	2.25M	2.55M ^{+35MM} _{-30MM}	0.15M



ORDERING LENGTH:
MAX OPERATING LENGTH D
ORDERING PART NO. LENGTH B (COILED)

ELII-5040063-001= 0.6 Meter
ELII-5040063-002= 0.8 Meter
ELII-5040063-003= 1.05 Meter



Overview

- M12 Male A to M12 Female A PUR Cable
- Head A: IP66K, IP67; Head B: IP66K, IP67
- Cable: SF/UTP 4*[26AWG(30/0.08±0.008BC)+Non-woven fabric]+PP PORE+AL/MYLAR+BRAID(16*9/0.10TC)+Non-woven fabric OD:Ø7.2±0.2MM PUR JACKET.

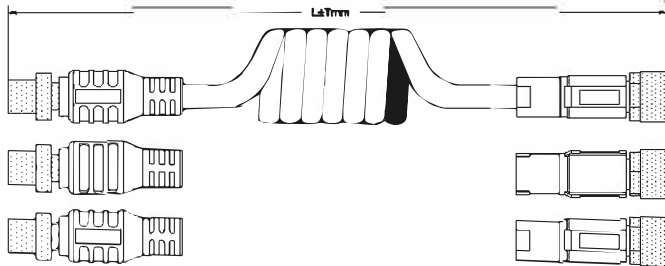

Technical data

Side A

Head A: Connection	M12
Head A: Angle cable outlet	0°
Head A: Gender	Male
Head A: Coding	A
Head A: No. of poles	8
Head A: LED	No
Head A: Width across flats	SW13
Head A: Tightening torque	0.6 Nm
Head A: Knurled nut material	Zinc-pressure die casting, surface Ni
Head A: Body color	Black
Labeling sleeve side A	Yes
O-Ring:	N/A

Side B

Head B: Connection	M12
Head B: Angle cable outlet	0°
Head B: Gender	Female
Head B: Coding	A
Head B: No. of poles	8
Head B: LED	No
Head B: Width across flats	SW13
Head B: Tightening torque	0.6 Nm
Head B: Knurled nut material	Zinc-pressure die casting, surface Ni
Head B: Body color	Black
Labeling sleeve side B	Yes
O-Ring:	Silica gel

Cables

Shielded	Yes
Conductor structure	30 × 0.08 mm
AWG	26
External sheath: Material	PUR
External sheath: Color	/
Cable diameter	7.2±0.2mm
Wire cross section	40.7mm ²

Electrical data

Operating voltage	max. 60VDC
Nominal voltage	300 V
Contact resistance	max. 30 mOhm
Operating current per contact	max. 2 A

Mechanical data

Head A: Degree of protection	IP66K, IP67
Head B: Degree of protection	IP66K, IP67
Bending radius (mobile)	min. 15 x outer diameter
Bending radius (fixed)	min. 8 x outer diameter
Torsion supported	

Environmental conditions

Temperature range (mobile)	-25°C+70°C
Temperature range (fixed)	-25°C+80°C
Cable: Temperature range (fixed)	-40°C+80°C
Dragchain capable	Yes
Head A: Chemical resistance	No
Head A: Flame resistance	HB (UL 94)
Head A: Oil resistance	ASTM 1 oil, mineral oils, limited to hydraulic oils
Head A: Acid and alkali resistant	No



Technical data

Environmental conditions

Head A: Pollution degree	3
Head B: Chemical resistance	No
Head B: Flame resistance	HB (UL94)
Head B: Pollution degree	3


Environmental conditions

Cable: Silicone-free	Yes
----------------------	-----

Side A

Technical drawing


Coding

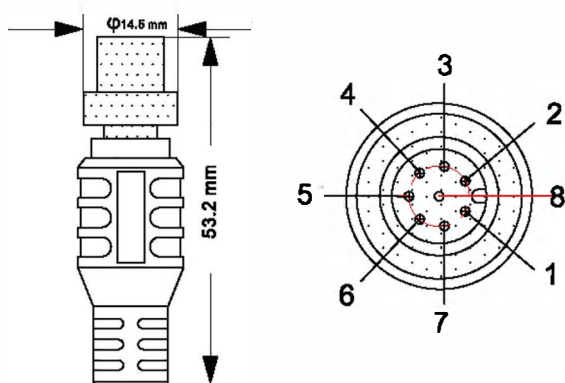

Side B

Technical drawing

Coding

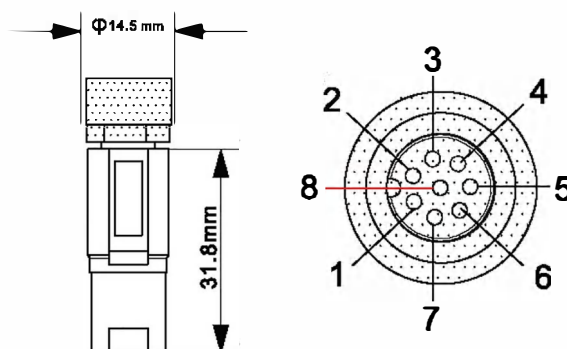


Connection diagram


SIDE A

SIDE B

1	1	WHITE/ORANGE
2	2	ORANGE
3	3	WHITE/GREEN
4	4	GREEN
5	5	WHITE/BROWN
6	6	BROWN
7	7	WHITE/BLUE
8	8	BLUE
S	S	SHIELDED

Sectional view

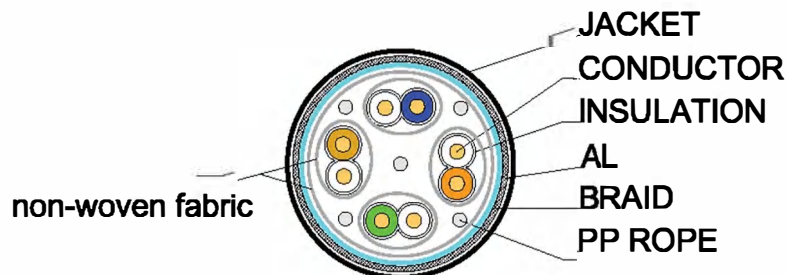

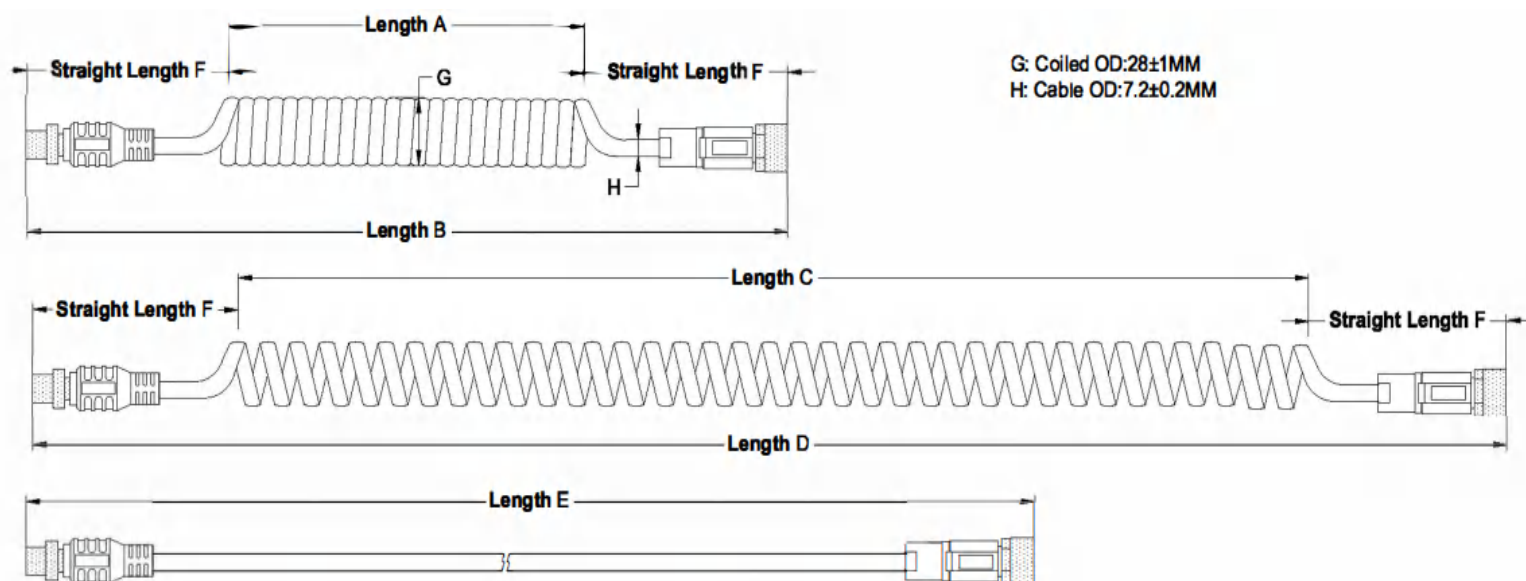

NOTED: Coiled cable has a useful extension range of approximately 3 times the retracted length of cable.
Repeated extension beyond this upper limit length may result in permanent loss of coil memory.

Straight Cable before coiled Length E	Length A	Length B	Length C	Length D	Length F
3.076M ^{+35MM} _{-30MM}	0.3M	0.6M ^{+35MM} _{-15MM}	0.9M	1.2M ^{+35MM} _{-20MM}	0.15M
4.926M ^{+35MM} _{-30MM}	0.5M	0.8M ^{+35MM} _{-15MM}	1.5M	1.8M ^{+35MM} _{-20MM}	0.15M
7.239M±50MM	0.75M	1.05M ^{+35MM} _{-20MM}	2.25M	2.55M ^{+35MM} _{-30MM}	0.15M



ORDERING LENGTH:
MAX OPERATING LENGTH D
ORDERING PART NO. LENGTH B (COILED)

ELII-5040064-001=0.6Meter
ELII-5040064-002=0.8Meter
ELII-5040064-003 = 1.05 Meter



Overview

- M12 Male A to RJ45 Male A PUR Cable
- Head A: IP66K, IP67; Head B: IP20
- Cable: SF/UTP 4*[26AWG(30/0.08±0.008BC)+Non-woven fabric]+PP PORE+AL/MYLAR+BRAID(16*9/0.10TC)+Non-woven fabric OD:Ø7.2±0.2MM PUR JACKET.

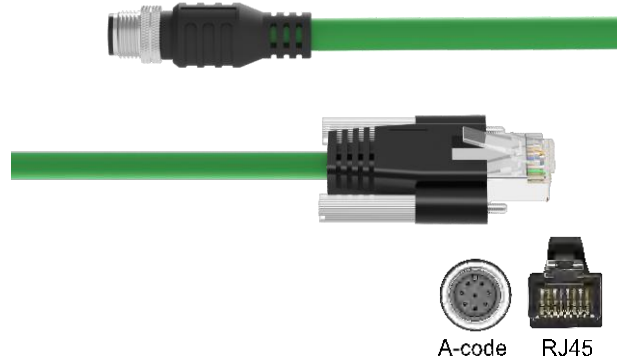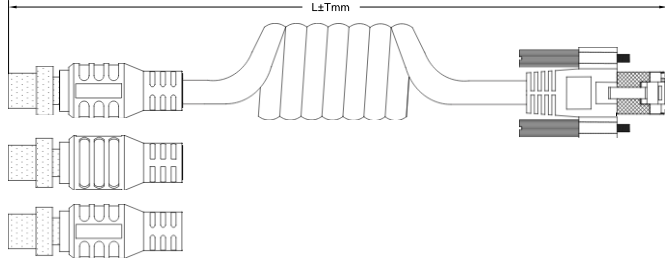

Technical data

Side A

Head A: Connection	M12
Head A: Angle cable outlet	0°
Head A: Gender	Male
Head A: Coding	A
Head A: No. of poles	8
Head A: LED	No
Head A: Width across flats	SW13
Head A: Tightening torque	0.6 Nm
Head A: Knurled nut material	Zinc-pressure die casting, surface Ni
Head A: Body color	Black
Labeling sleeve side A	Yes
O-Ring:	N/A

Side B

Head B: Connection	RJ45
Head B: Angle cable outlet	0°
Head B: Gender	Male
Head B: Coding	N/A
Head B: No. of poles	8
Head B: LED	No
Head B: Body color	Black
Labeling sleeve side B	Yes

Electrical data

Operating voltage	max.60VDC
Nominal voltage	300 V
Contact resistance	max. 30 mOhm
Operating current per contact	max. 2 A

Mechanical data

Head A: Degree of protection	IP66K, IP67
Head B: Degree of protection	IP20
Bending radius (mobile)	min.15 x outer diameter
Bending radius (fixed)	min.8 x outer diameter
Torsion supported	

Environmental conditions

Temperature range (mobile)	-25°C+70°C
Temperature range (fixed)	-25°C+80°C
Cable: Temperature range (fixed)	-40°C+80°C
Dragchain capable	Yes
Head A: Chemical resistance	No
Head A: Flame resistance	HB (UL 94)
Head A: Oil resistance	ASTM 1 oil, mineral oils, limited to hydraulic oils
Head A: Acid and alkali resistant	No

Cables

Shielded	Yes
Conductor structure	30 × 0.08 mm
AWG	26
External sheath: Material	PUR
External sheath: Color	/
Cable diameter	7.2±0.2mm
Wire cross section	40.7mm²



Technical data

Environmental conditions

Head A: Pollution degree	3
Head B: Chemical resistance	No
Head B: Flame resistance	HB (UL94)
Head B: Pollution degree	3


Environmental conditions

Cable: Silicone-free	Yes
----------------------	-----

Side A

Technical drawing


Coding

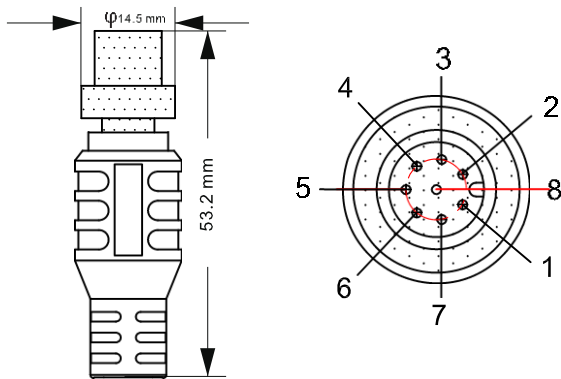

Side B

Technical drawing

Coding

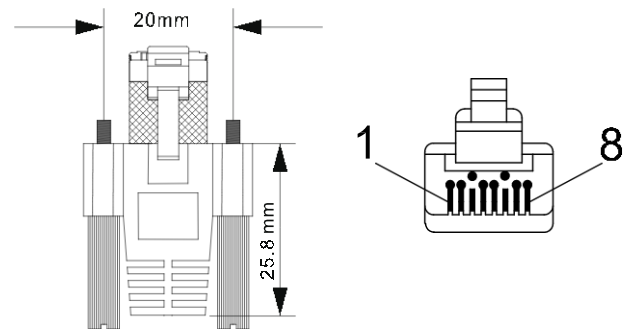


Connection diagram


SIDE A

SIDE B

6	1	WHITE/ORANGE
4	2	ORANGE
5	3	WHITE/GREEN
7	4	BLUE
1	5	WHITE/BLUE
8	6	GREEN
2	7	WHITE/BROWN
3	8	BROWN
S	S	SHIELDED

Sectional view

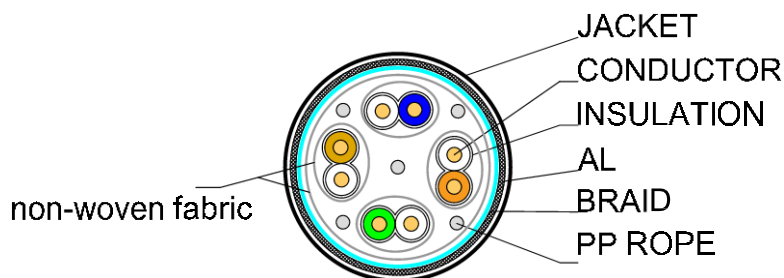

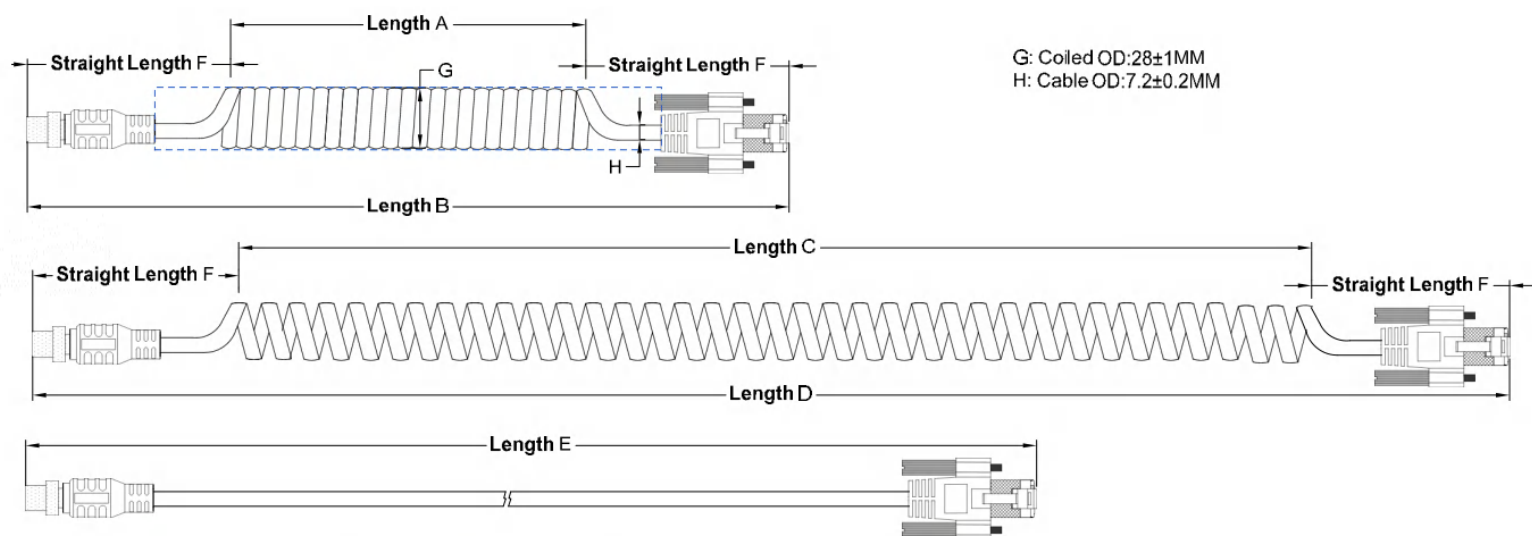

NOTED: Coiled cable has a useful extension range of approximately 3 times the retracted length of cable. Repeated extension beyond this upper limit length may result in permanent loss of coil memory.

Straight Cable before coiled Length E	Length A	Length B	Length C	Length D	Length F
3.076M ^{+35MM} _{-30MM}	0.3M	0.6M ^{+35MM} _{-15MM}	0.9M	1.2M ^{+35MM} _{-20MM}	0.15M
4.926M ^{+35MM} _{-30MM}	0.5M	0.8M ^{+35MM} _{-15MM}	1.5M	1.8M ^{+35MM} _{-20MM}	0.15M
7.239M±50MM	0.75M	1.05M ^{+35MM} _{-20MM}	2.25M	2.55M ^{+35MM} _{-30MM}	0.15M


ORDERING LENGTH:
MAX OPERATING LENGTH D
ORDERING PART NO. LENGTH B (COILED)

ELII-5040065-001= 0.6 Meter
ELII-5040065-002= 0.8 Meter
ELII-5040065-003= 1.05 Meter



Overview

- M12 Male A to RJ45 Female A PUR Cable
- Head A: IP66K, IP67; Head B: IP20
- Cable: SF/UTP 4*[26AWG(30/0.08±0.008BC)+Non-woven fabric]+PP PORE+AL/MYLAR+BRAID(16*9/0.10TC)+Non-woven fabric OD:Ø7.2±0.2MM PUR JACKET.

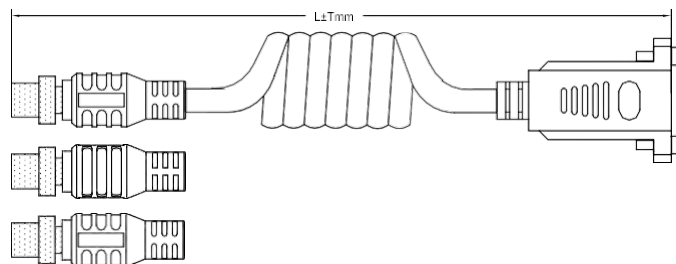

A-code

RJ45

Technical data

Side A

Head A: Connection	M12
Head A: Angle cable outlet	0°
Head A: Gender	Male
Head A: Coding	A
Head A: No. of poles	8
Head A: LED	No
Head A: Width across flats	SW13
Head A: Tightening torque	0.6 Nm
Head A: Knurled nut material	Zinc-pressure die casting, surface Ni
Head A: Body color	Black
Labeling sleeve side A	Yes
O-Ring:	N/A

Side B

Head B: Connection	RJ45
Head B: Angle cable outlet	0°
Head B: Gender	Female
Head B: Coding	N/A
Head B: No. of poles	8
Head B: LED	No
Head B: Body color	Black
Labeling sleeve side B	Yes

Electrical data

Operating voltage	max.60VDC
Nominal voltage	300 V
Contact resistance	max. 30 mOhm
Operating current per contact	max. 2 A

Mechanical data

Head A: Degree of protection	IP66K, IP67
Head B: Degree of protection	IP20
Bending radius (mobile)	min.15 x outer diameter
Bending radius (fixed)	min.8 x outer diameter
Torsion supported	

Environmental conditions

Temperature range (mobile)	-25°C+70°C
Temperature range (fixed)	-25°C+80°C
Cable: Temperature range (fixed)	-40°C+80°C
Dragchain capable	Yes
Head A: Chemical resistance	No
Head A: Flame resistance	HB (UL 94)
Head A: Oil resistance	ASTM 1 oil, mineral oils, limited to hydraulic oils
Head A: Acid and alkali resistant	No

Cables

Shielded	Yes
Conductor structure	30 × 0.08 mm
AWG	26
External sheath: Material	PUR
External sheath: Color	/
Cable diameter	7.2±0.2mm
Wire cross section	40.7mm ²



Technical data

Environmental conditions

Head A: Pollution degree	3
Head B: Chemical resistance	No
Head B: Flame resistance	HB (UL94)
Head B: Pollution degree	3


Environmental conditions

Cable: Silicone-free	Yes
----------------------	-----

Side A

Technical drawing


Coding

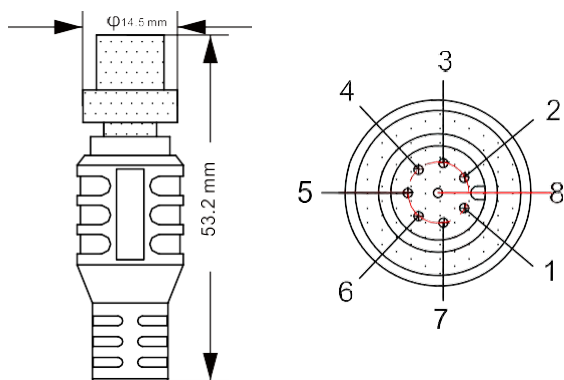

Side B

Technical drawing

Coding

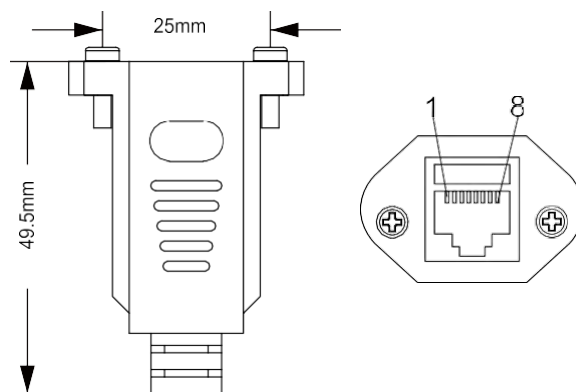


Connection diagram


SIDE A

SIDE B

6	1	WHITE/ORANGE
4	2	ORANGE
5	3	WHITE/GREEN
7	4	BLUE
1	5	WHITE/BLUE
8	6	GREEN
2	7	WHITE/BROWN
3	8	BROWN
S	S	SHIELDED

Sectional view

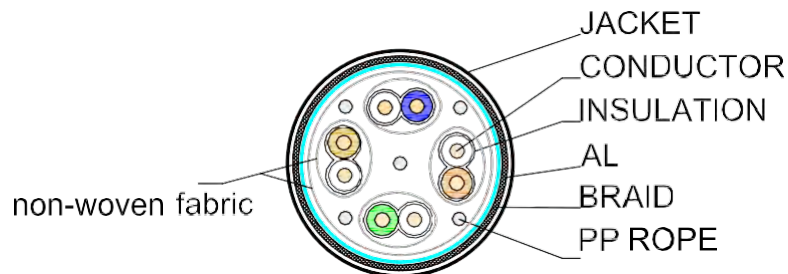

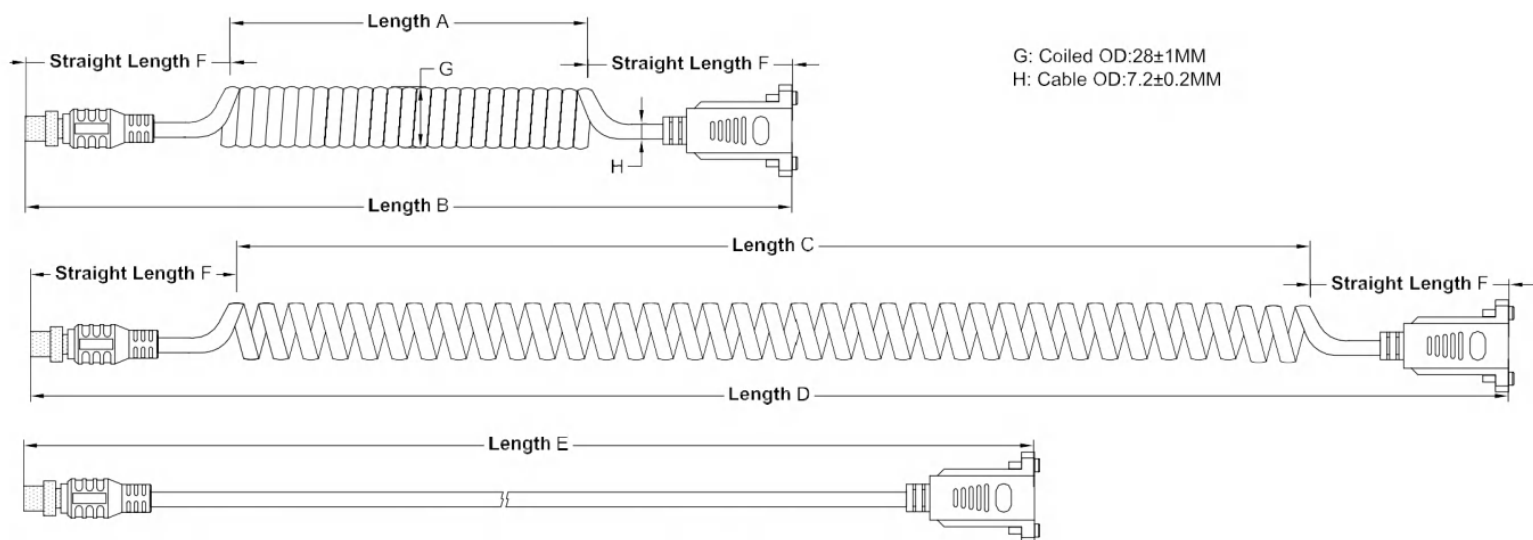

G: Coiled OD: 28±1MM
H: Cable OD: 7.2±0.2MM

NOTED: Coiled cable has a useful extension range of approximately 3 times the retracted length of cable. Repeated extension beyond this upper limit length may result in permanent loss of coil memory.

Straight Cable before coiled Length E	Length A	Length B	Length C	Length D	Length F
3.076M ^{+35MM} _{-30MM}	0.3M	0.6M ^{+35MM} _{-15MM}	0.9M	1.2M ^{+35MM} _{-20MM}	0.15M
4.926M ^{+35MM} _{-30MM}	0.5M	0.8M ^{+35MM} _{-15MM}	1.5M	1.8M ^{+35MM} _{-20MM}	0.15M
7.239M±50MM	0.75M	1.05M ^{+35MM} _{-20MM}	2.25M	2.55M ^{+35MM} _{-30MM}	0.15M


ORDERING LENGTH:
MAX OPERATING LENGTH D
ORDERING PART NO. LENGTH B (COILED)

ELII-5040066-001= 0.6 Meter
ELII-5040066-002= 0.8 Meter
ELII-5040066-003= 1.05 Meter



Overview

- M12 Female A to RJ45 Male A PUR Cable
- Head A: IP66K, IP67; Head B: IP20
- Cable: SF/UTP 4*[26AWG(30/0.08±0.008BC)+Non-woven fabric]+PP PORE+AL/MYLAR+BRAID(16*9/0.10TC)+Non-woven fabric OD:Ø7.2±0.2MM PUR JACKET.

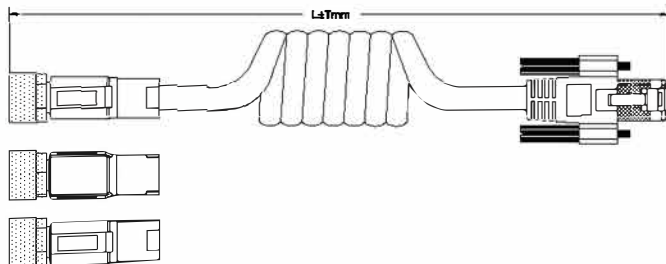

A-code RJ45

Technical data

Side A

Head A: Connection	M12
Head A: Angle cable outlet	0°
Head A: Gender	Female
Head A: Coding	A
Head A: No. of poles	8
Head A: LED	No
Head A: Width across flats	SW13
Head A: Tightening torque	0.6 Nm
Head A: Knurled nut material	Zinc-pressure die casting, surface Ni
Head A: Body color	Black
Labeling sleeve side A	Yes
O-Ring:	Silica gel

Side B

Head B: Connection	RJ45
Head B: Angle cable outlet	0°
Head B: Gender	Male
Head B: Coding	N/A
Head B: No. of poles	8
Head B: LED	No
Head B: Body color	Black
Labeling sleeve side B	Yes

Electrical data

Operating voltage	max. 60VDC
Nominal voltage	300 V
Contact resistance	max. 30 mOhm
Operating current per contact	max. 2 A

Mechanical data

Head A: Degree of protection	IP66K, IP67
Head B: Degree of protection	IP20
Bending radius (mobile)	min. 15 x outer diameter
Bending radius (fixed)	min. 8 x outer diameter
Torsion supported	

Environmental conditions

Temperature range (mobile)	-25°C+70°C
Temperature range (fixed)	-25°C+80°C
Cable: Temperature range (fixed)	-40°C+80°C
Dragchain capable	Yes
Head A: Chemical resistance	No
Head A: Flame resistance	HB (UL 94)
Head A: Oil resistance	ASTM 1 oil, mineral oils, limited to hydraulic oils
Head A: Acid and alkali resistant	No

Cables

Shielded	Yes
Conductor structure	30 × 0.08 mm
AWG	26
External sheath: Material	PUR
External sheath: Color	/
Cable diameter	7.2±0.2mm
Wire cross section	40.7mm²



Technical data

Environmental conditions

Head A: Pollution degree	3
Head B: Chemical resistance	No
Head B: Flame resistance	HB (UL94)
Head B: Pollution degree	3


Environmental conditions

Cable: Silicone-free	Yes
----------------------	-----

Side A

Technical drawing


Coding

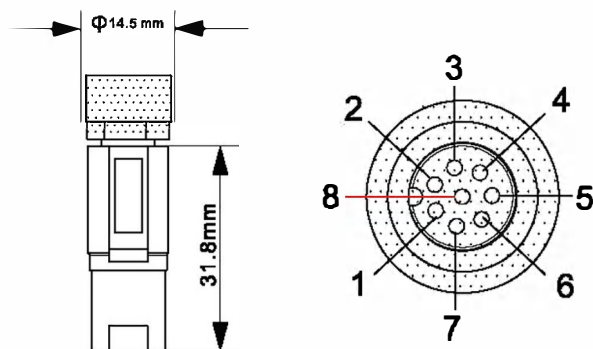

Side B

Technical drawing

Coding

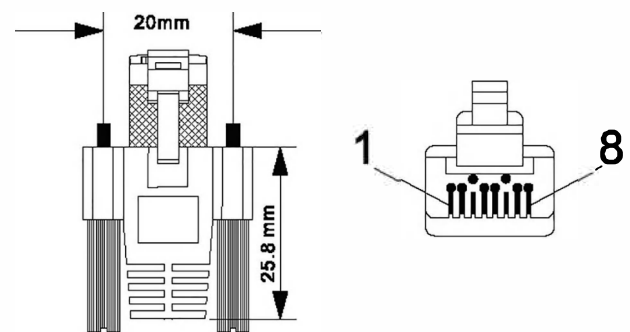


Connection diagram


SIDE A

SIDE B

6	1	WHITE/ORANGE
4	2	ORANGE
5	3	WHITE/GREEN
7	4	BLUE
1	5	WHITE/BLUE
8	6	GREEN
2	7	WHITE/BROWN
3	8	BROWN
S	S	SHIELDED

Sectional view

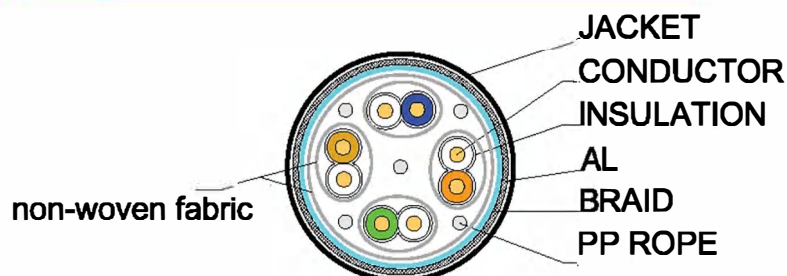

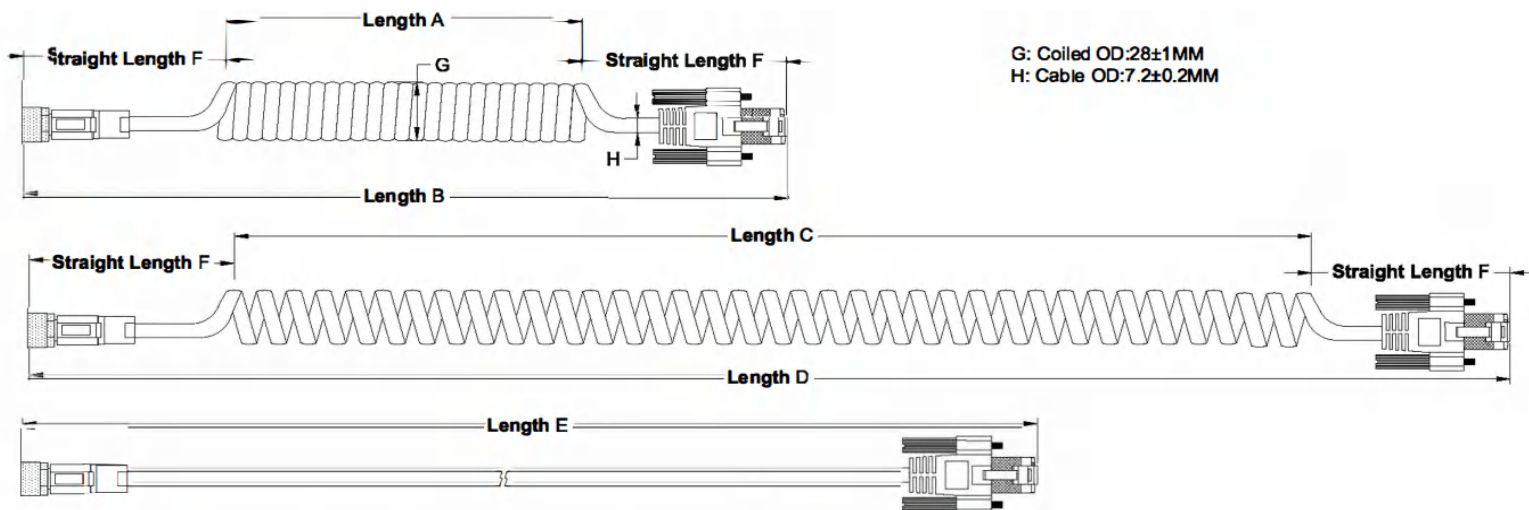

NOTED: Coiled cable has a useful extension range of approximately 3 times the retracted length of cable.
Repeated extension beyond this upper limit length may result in permanent loss of coil memory.

Straight Cable before coiled Length E	Length A	Length B	Length C	Length D	Length F
3.076M ^{+35MM} _{-30MM}	0.3M	0.6M ^{+35MM} _{-15MM}	0.9M	1.2M ^{+35MM} _{-20MM}	0.15M
4.926M ^{+35MM} _{-30MM}	0.5M	0.8M ^{+35MM} _{-15MM}	1.5M	1.8M ^{+35MM} _{-20MM}	0.15M
7.239M±50MM	0.75M	1.05M ^{+35MM} _{-20MM}	2.25M	2.55M ^{+35MM} _{-30MM}	0.15M



ORDERING LENGTH:
MAX OPERATING LENGTH D
ORDERING PART NO. LENGTH B (COILED)

ELII-5040067-001=0.6Meter
ELII-5040067-002=0.8Meter
ELII-5040067-003 = 1.05 Meter



Overview

- M12 Male A to RJ45 Male A PUR Cable
- Head A: IP66K, IP67; Head B: IP20
- Cable: SF/UTP 4*[26AWG(30/0.08±0.008BC)+Non-woven fabric]+PP PORE+AL/MYLAR+BRAID(16*9/0.10TC)+Non-woven fabric OD:Ø7.2±0.2MM PUR JACKET.

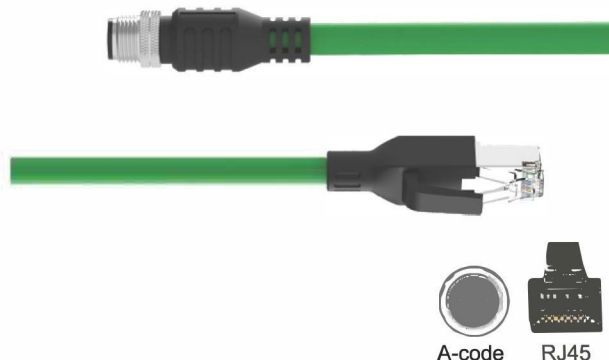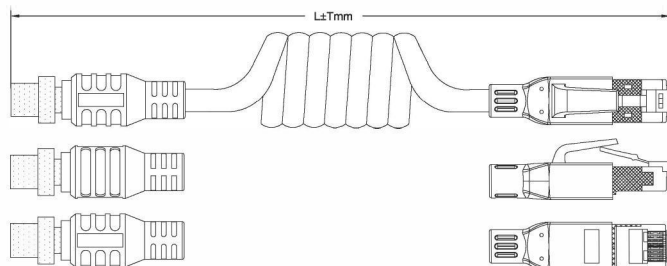

Technical data

Side A

Head A: Connection	M12
Head A: Angle cable outlet	0°
Head A: Gender	Male
Head A: Coding	A
Head A: No. of poles	8
Head A: LED	No
Head A: Width across flats	SW13
Head A: Tightening torque	0.6 Nm
Head A: Knurled nut material	Zinc-pressure die casting, surface Ni
Head A: Body color	Black
Labeling sleeve side A	Yes
O-Ring:	N/A

Side B

Head B: Connection	RJ45
Head B: Angle cable outlet	0°
Head B: Gender	Male
Head B: Coding	N/A
Head B: No. of poles	8
Head B: LED	No
Head B: Body color	Black
Labeling sleeve side B	Yes

Electrical data

Operating voltage	max.60VDC
Nominal voltage	300 V
Contact resistance	max. 30 mOhm
Operating current per contact	max. 2 A

Mechanical data

Head A: Degree of protection	IP66K, IP67
Head B: Degree of protection	IP20
Bending radius (mobile)	min.15 x outer diameter
Bending radius (fixed)	min.8 x outer diameter
Torsion supported	

Environmental conditions

Temperature range (mobile)	-25°C+70°C
Temperature range (fixed)	-25°C+80°C
Cable: Temperature range (fixed)	-40°C+80°C
Dragchain capable	Yes
Head A: Chemical resistance	No
Head A: Flame resistance	HB (UL 94)
Head A: Oil resistance	ASTM 1 oil, mineral oils, limited to hydraulic oils
Head A: Acid and alkali resistant	No

Cables

Shielded	Yes
Conductor structure	30 × 0.08 mm
AWG	26
External sheath: Material	PUR
External sheath: Color	/
Cable diameter	7.2±0.2mm
Wire cross section	40.7mm ²



Technical data

Environmental conditions

Head A: Pollution degree	3
Head B: Chemical resistance	No
Head B: Flame resistance	HB (UL94)
Head B: Pollution degree	3


Environmental conditions

Cable: Silicone-free	Yes
----------------------	-----

Side A

Technical drawing


Coding

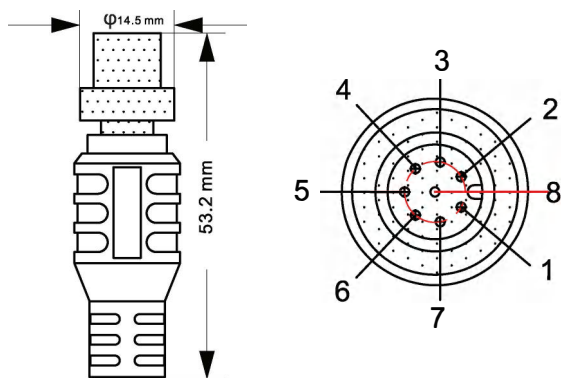

Side B

Technical drawing

Coding

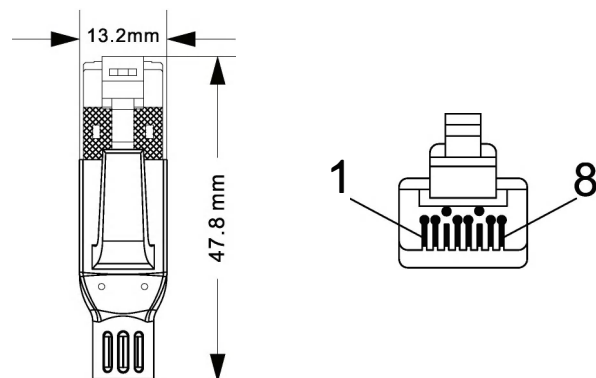


Cable color coding


SIDE A

SIDE B


6	1	WHITE/ORANGE
4	2	ORANGE
5	3	WHITE/GREEN
7	4	BLUE
1	5	WHITE/BLUE
8	6	GREEN
2	7	WHITE/BROWN
3	8	BROWN
S	S	SHIELDED

Sectional view

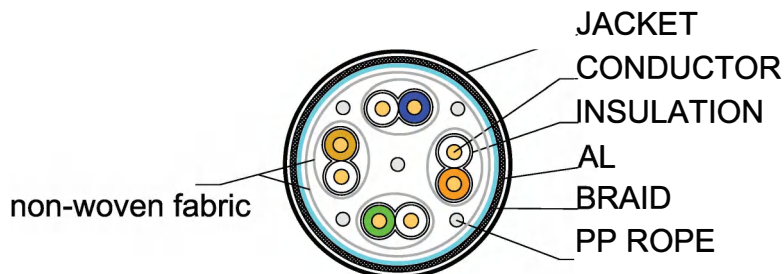

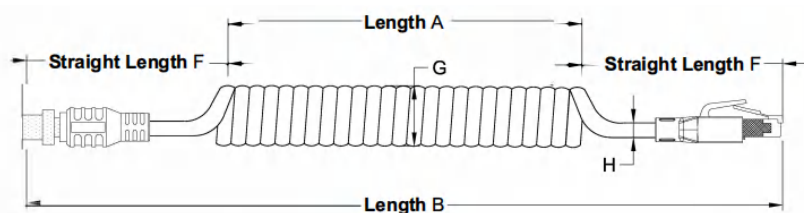

G: Coiled OD:28±1MM
H: Cable OD:7.2±0.2MM

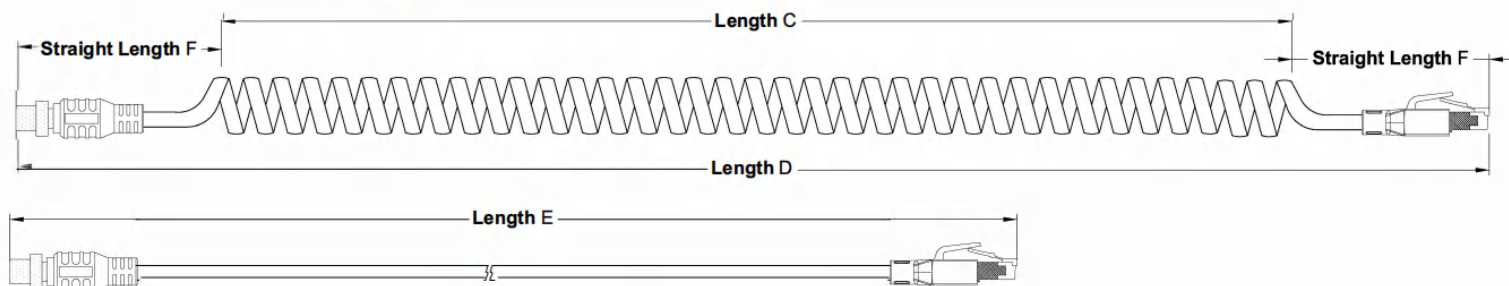

NOTED: Coiled cable has a useful extension range of approximately 3 times the retracted length of cable.
Repeated extension beyond this upper limit length may result in permanent loss of coil memory.


Straight Cable before coiled Length E	Length A	Length B	Length C	Length D	Length F
3.076M ^{+35MM} _{-30MM}	0.3M	0.6M ^{+35MM} _{-15MM}	0.9M	1.2M ^{+35MM} _{-20MM}	0.15M
4.926M ^{+35MM} _{-30MM}	0.5M	0.8M ^{+35MM} _{-15MM}	1.5M	1.8M ^{+35MM} _{-20MM}	0.15M
7.239M±50MM	0.75M	1.05M ^{+35MM} _{-20MM}	2.25M	2.55M ^{+35MM} _{-30MM}	0.15M

ORDERING LENGTH :
MAX OPERATION LENGTH D
ORDERING PART NO. LENGTH B (COILED)

ELII-5040068-001=0.6Meter
ELII-5040068-002=0.8Meter
ELII-5040068-003=1.05 Meter

Overview

- M12 Male A to RJ45 Female A PUR Cable
- Head A: IP66K, IP67; Head B: IP20
- Cable: SF/UTP 4*[26AWG(30/0.08±0.008BC)+Non-woven fabric]+PP PORE+AL/MYLAR+BRAID(16*9/0.10TC)+Non-woven fabric OD:Ø7.2±0.2MM PUR JACKET.

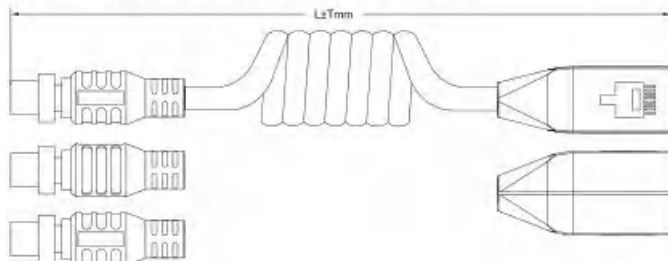

Technical data

Side A

Head A Connection	M12
Head A Angle cable outlet	0°
Head A Gender	Male
Head A Coding	A
Head A: No. of poles	8
Head A: LED	No
Head A: Width across flats	SW13
Head A: Tightening torque	0.6 Nm
Head A: Knurled nut material	Zinc-pressure die casting, surface Ni
Head A: Body color	Black
Labeling sleeve side A	Yes
O-Ring:	N/A

Side B

Head B: Connection	RJ45
Head B: Angle cable outlet	0°
Head B: Gender	Female
Head B: Coding	N/A
Head B: No. of poles	8
Head B: LED	No
Head B: Body color	Black
Labeling sleeve side B	Yes

Electrical data

Operating voltage	max.60VDC
Nominal voltage	300 V
Contact resistance	max. 30 mOhm
Operating current per contact	max. 2 A

Mechanical data

Head A: Degree of protection	IP66K, IP67
Head B: Degree of protection	IP20
Bending radius (mobile)	min.15 x outer diameter
Bending radius (fixed)	min.8 x outer diameter
Torsion supported	

Environmental conditions

Temperature range (mobile)	-25°C+70°C
Temperature range (fixed)	-25°C+80°C
Cable: Temperature range (fixed)	-40°C+80°C
Dragchain capable	Yes
Head A: Chemical resistance	No
Head A: Flame resistance	HB (UL 94)
Head A: Oil resistance	ASTM 1 oil, mineral oils, limited to hydraulic oils
Head A: Acid and alkali resistant	No

Cables

Shielded	Yes
Conductor structure	30 × 0.08 mm
AWG	26
External sheath: Material	PUR
External sheath: Color	/
Cable diameter	7.2±0.2mm
Wire cross section	40.7mm²



Technical data

Environmental conditions

Head A: Pollution degree	3
Head B: Chemical resistance	No
Head B: Flame resistance	HB (UL94)
Head B: Pollution degree	3


Environmental conditions

Cable: Silicone-free	Yes
----------------------	-----

Side A

Technical drawing


Coding

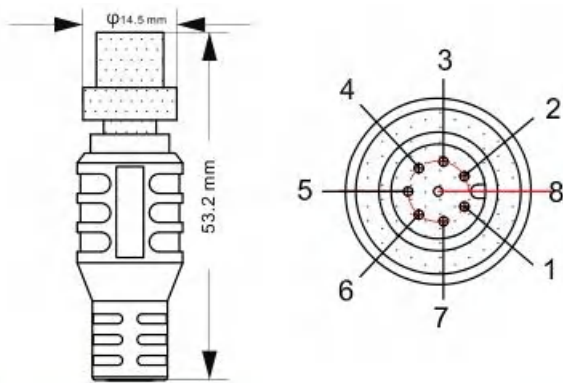

Side B

Technical drawing

Coding

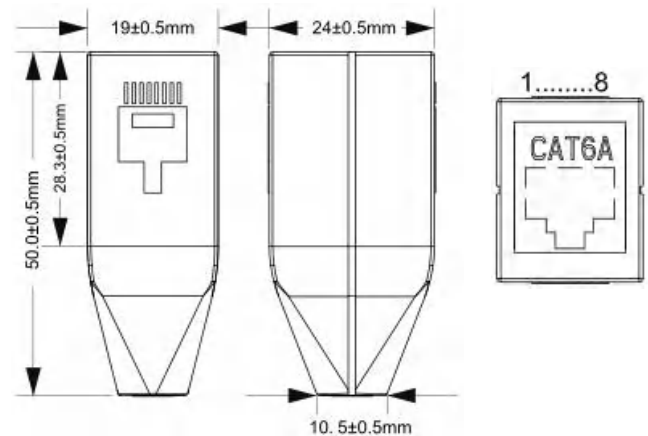


Connection diagram


SIDE A

SIDE B


6	1	WHITE/ORANGE
4	2	ORANGE
5	3	WHITE/GREEN
7	4	BLUE
1	5	WHITE/BLUE
8	6	GREEN
2	7	WHITE/BROWN
3	8	BROWN
S	S	SHIELDED

Sectional view

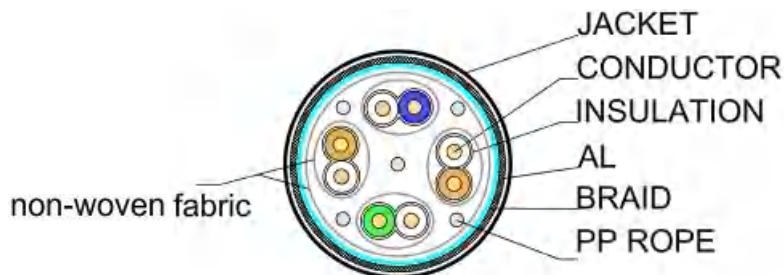

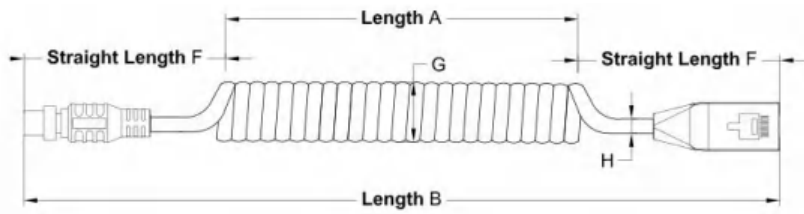

G: Coiled OD: 28±1MM
H: Cable OD: 7.2±0.2MM

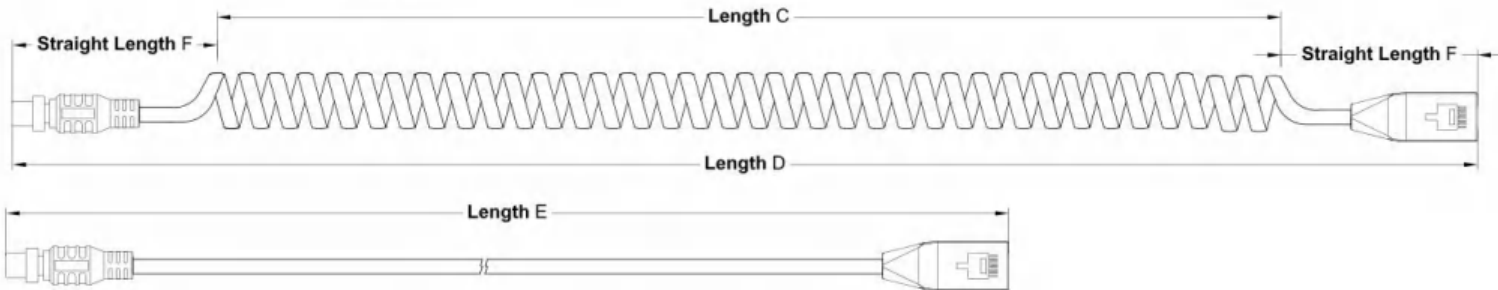

NOTED: Coiled cable has a useful extension range of approximately 3 times the retracted length of cable. Repeated extension beyond this upper limit length may result in permanent loss of coil memory.

Straight Cable before coiled Length E	Length A	Length B	Length C	Length D	Length F
3.076M ^{+35MM} _{-30MM}	0.3M	0.6M ^{+35MM} _{-15MM}	0.9M	1.2M ^{+35MM} _{-20MM}	0.15M
4.926M ^{+35MM} _{-30MM}	0.5M	0.8M ^{+35MM} _{-15MM}	1.5M	1.8M ^{+35MM} _{-20MM}	0.15M
7.239M±50MM	0.75M	1.05M ^{+35MM} _{-20MM}	2.25M	2.55M ^{+35MM} _{-30MM}	0.15M

ORDERING LENGTH:
MAX OPERATING LENGTH D
ORDERING PART NO. LENGTH B (COILED)



ELII-5040069-001= 0.6 Meter
ELII-5040069-002= 0.8 Meter
ELII-5040069-003= 1.05 Meter

www.electronic-links.com

sales@electronic-links.com

Overview

- M12 Female A to RJ45 Male A PUR Cable
- Head A: IP66K, IP67; Head B: IP20
- Cable: SF/UTP 4*[26AWG(30/0.08±0.008BC)+Non-woven fabric]+PP PORE+AL/MYLAR+BRAID(16*9/0.10TC)+Non-woven fabric OD:Ø7.2±0.2MM PUR JACKET.

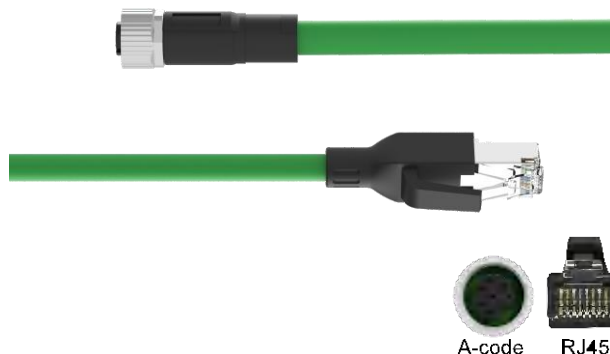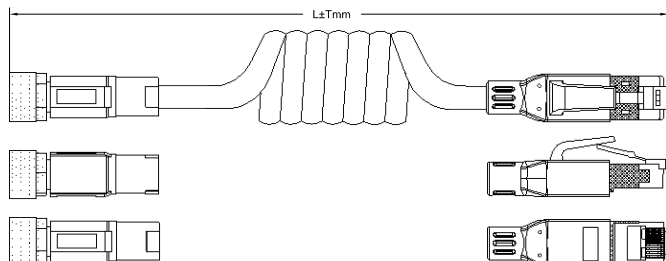

Technical data

Side A

Head A: Connection	M12
Head A: Angle cable outlet	0°
Head A: Gender	Female
Head A: Coding	A
Head A: No. of poles	8
Head A: LED	No
Head A: Width across flats	SW13
Head A: Tightening torque	0.6 Nm
Head A: Knurled nut material	Zinc-pressure die casting, surface Ni
Head A: Body color	Black
Labeling sleeve side A	Yes
O-Ring:	Silica gel

Side B

Head B: Connection	RJ45
Head B: Angle cable outlet	0°
Head B: Gender	Male
Head B: Coding	N/A
Head B: No. of poles	8
Head B: LED	No
Head B: Body color	Black
Labeling sleeve side B	Yes

Electrical data

Operating voltage	max.60VDC
Nominal voltage	300 V
Contact resistance	max. 30 mOhm
Operating current per contact	max. 2 A

Mechanical data

Head A: Degree of protection	IP66K, IP67
Head B: Degree of protection	IP20
Bending radius (mobile)	min.15 x outer diameter
Bending radius (fixed)	min.8 x outer diameter
Torsion supported	

Environmental conditions

Temperature range (mobile)	-25°C+70°C
Temperature range (fixed)	-25°C+80°C
Cable: Temperature range (fixed)	-40°C+80°C
Dragchain capable	Yes
Head A: Chemical resistance	No
Head A: Flame resistance	HB (UL 94)
Head A: Oil resistance	ASTM 1 oil, mineral oils, limited to hydraulic oils
Head A: Acid and alkali resistant	No

Cables

Shielded	Yes
Conductor structure	30 × 0.08 mm
AWG	26
External sheath: Material	PUR
External sheath: Color	/
Cable diameter	7.2±0.2mm
Wire cross section	40.7mm²

Technical data

Environmental conditions

Head A: Pollution degree	3
Head B: Chemical resistance	No
Head B: Flame resistance	HB (UL94)
Head B: Pollution degree	3


Environmental conditions

Cable: Silicone-free	Yes
----------------------	-----

Side A

Technical drawing


Coding

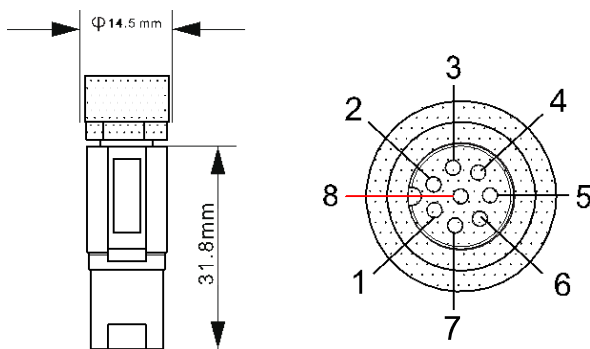

Side B

Technical drawing

Coding

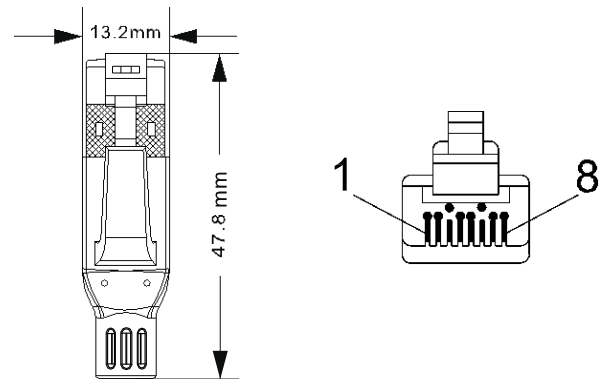


Connection diagram


SIDE A

SIDE B


6	1	WHITE/ORANGE
4	2	ORANGE
5	3	WHITE/GREEN
7	4	BLUE
1	5	WHITE/BLUE
8	6	GREEN
2	7	WHITE/BROWN
3	8	BROWN
S	S	SHIELDED

Sectional view

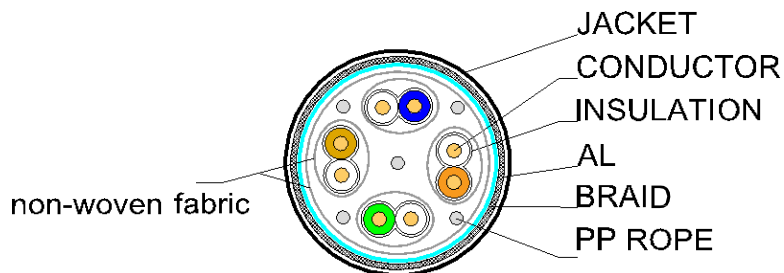

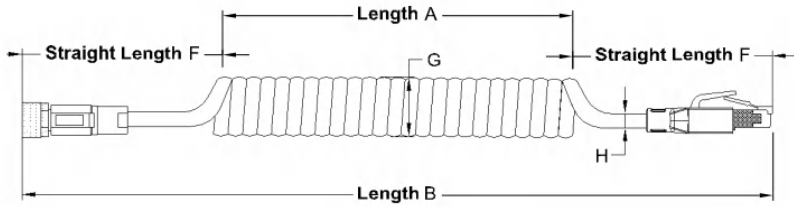

G: Coiled OD: 28±1MM
H: Cable OD: 7.2±0.2MM

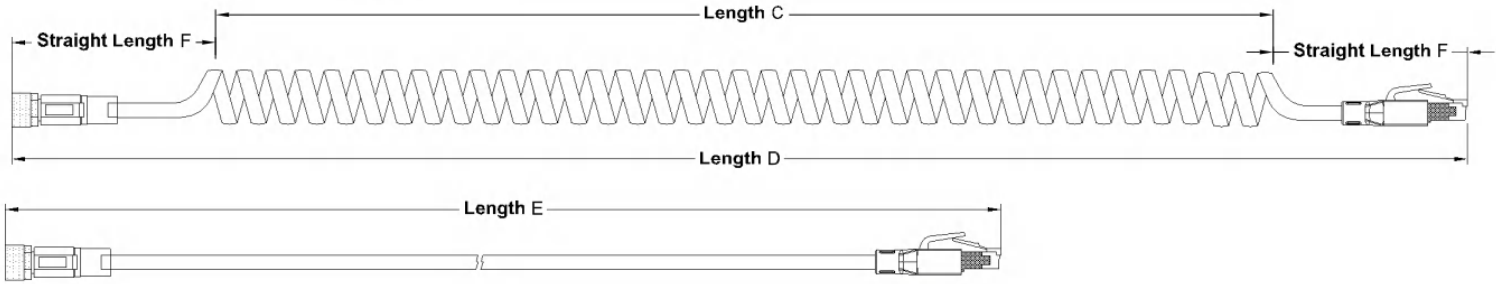

NOTED: Coiled cable has a useful extension range of approximately 3 times the retracted length of cable.
Repeated extension beyond this upper limit length may result in permanent loss of coil memory.

ORDERING LENGTH:

MAX OPERATING LENGTH D

ORDERING PART NO. LENGTH B (COILED)

ELII-5040070-001= 0.6 Meter


ELII-5040070-002= 0.8 Meter


ELII-5040070-003= 1.05 Meter

Straight Cable before coiled Length E	Length A	Length B	Length C	Length D	Length F
3.076M ^{+35MM} _{-30MM}	0.3M	0.6M ^{+35MM} _{-15MM}	0.9M	1.2M ^{+35MM} _{-20MM}	0.15M
4.926M ^{+35MM} _{-30MM}	0.5M	0.8M ^{+35MM} _{-15MM}	1.5M	1.8M ^{+35MM} _{-20MM}	0.15M
7.239M±50MM	0.75M	1.05M ^{+35MM} _{-20MM}	2.25M	2.55M ^{+35MM} _{-30MM}	0.15M

www.electronic-links.com

sales@electronic-links.com

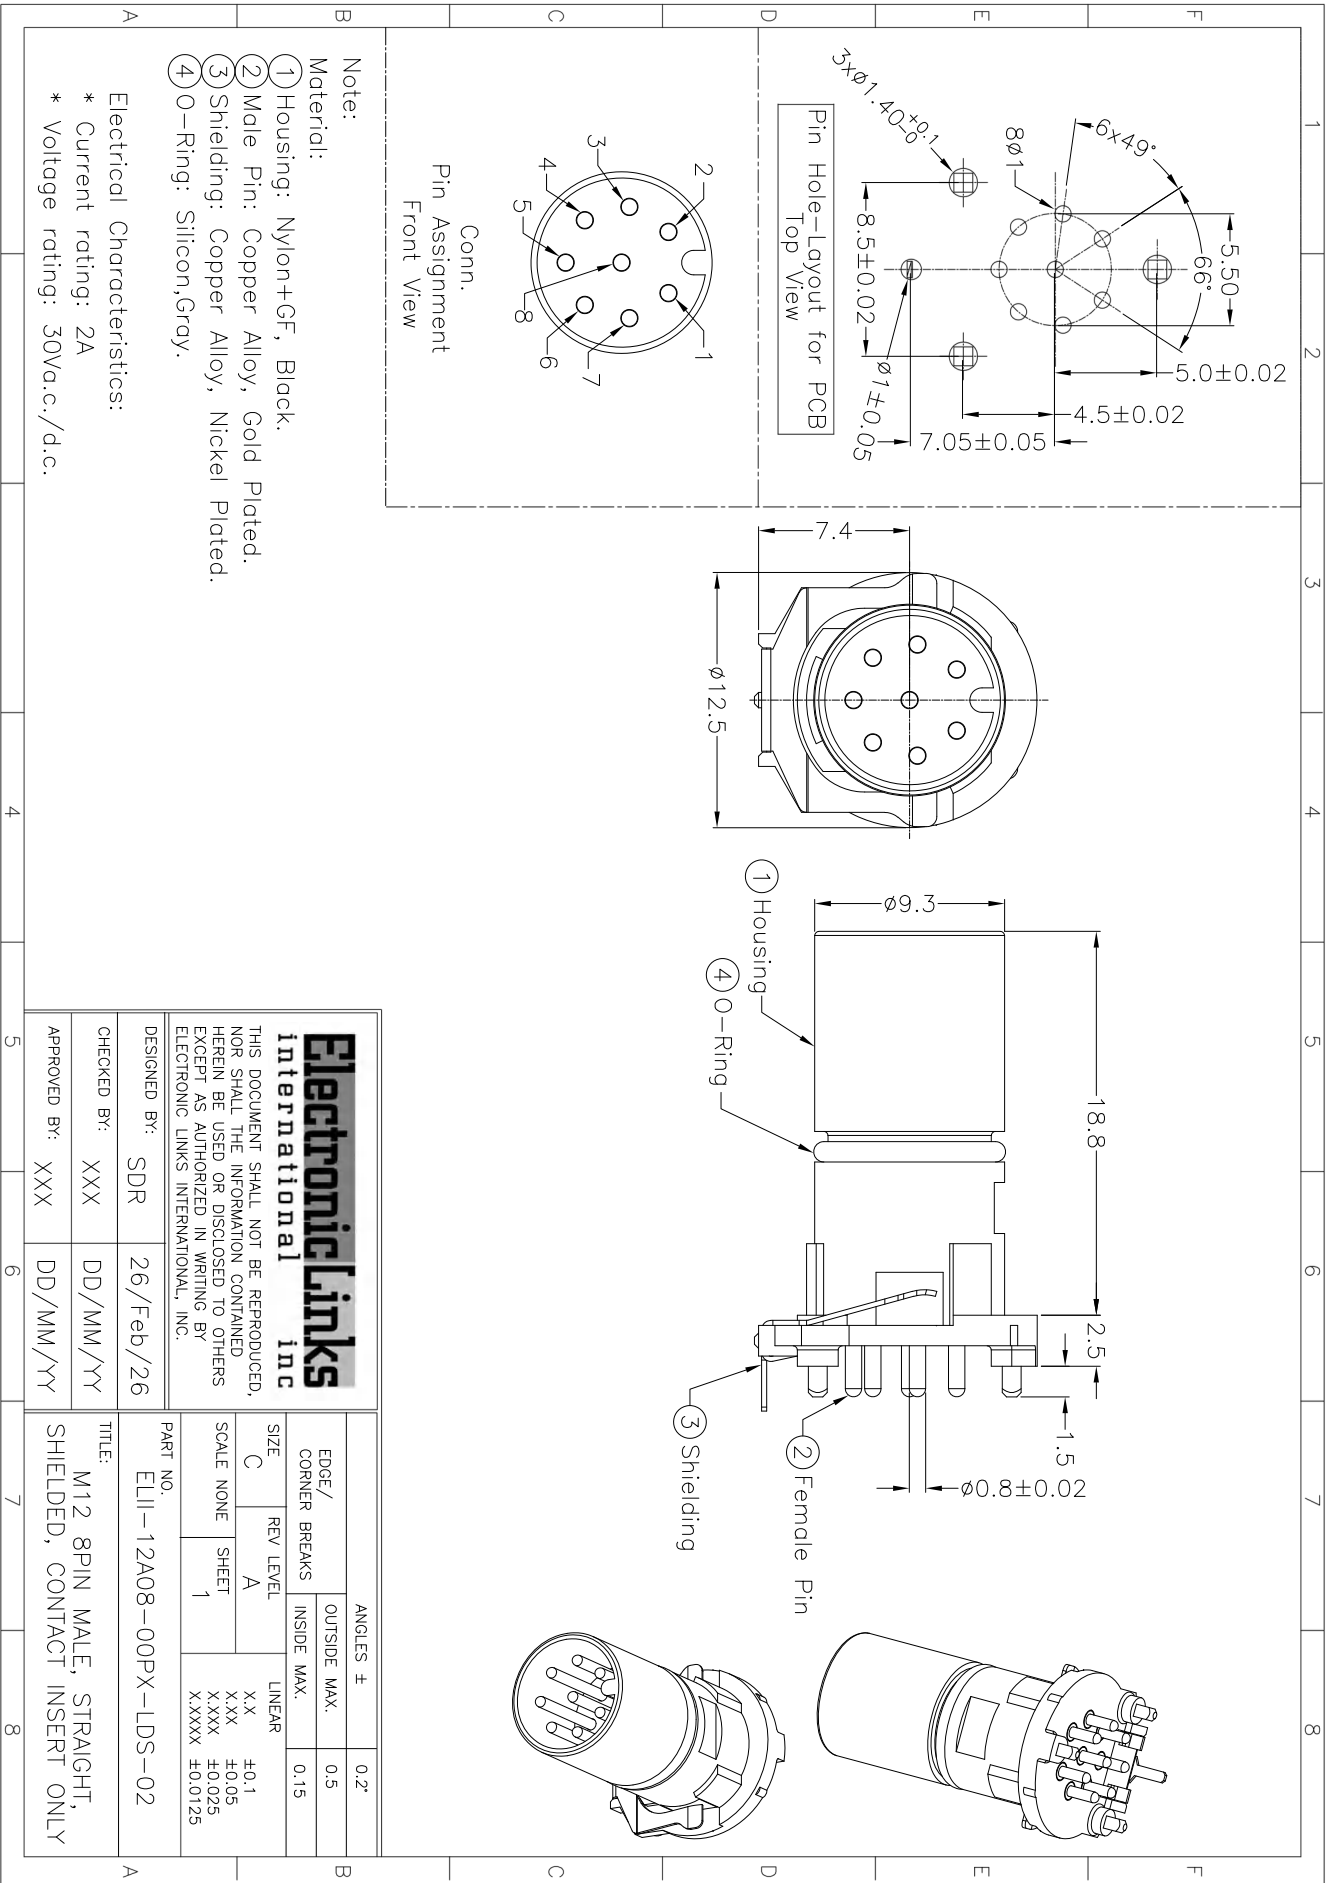

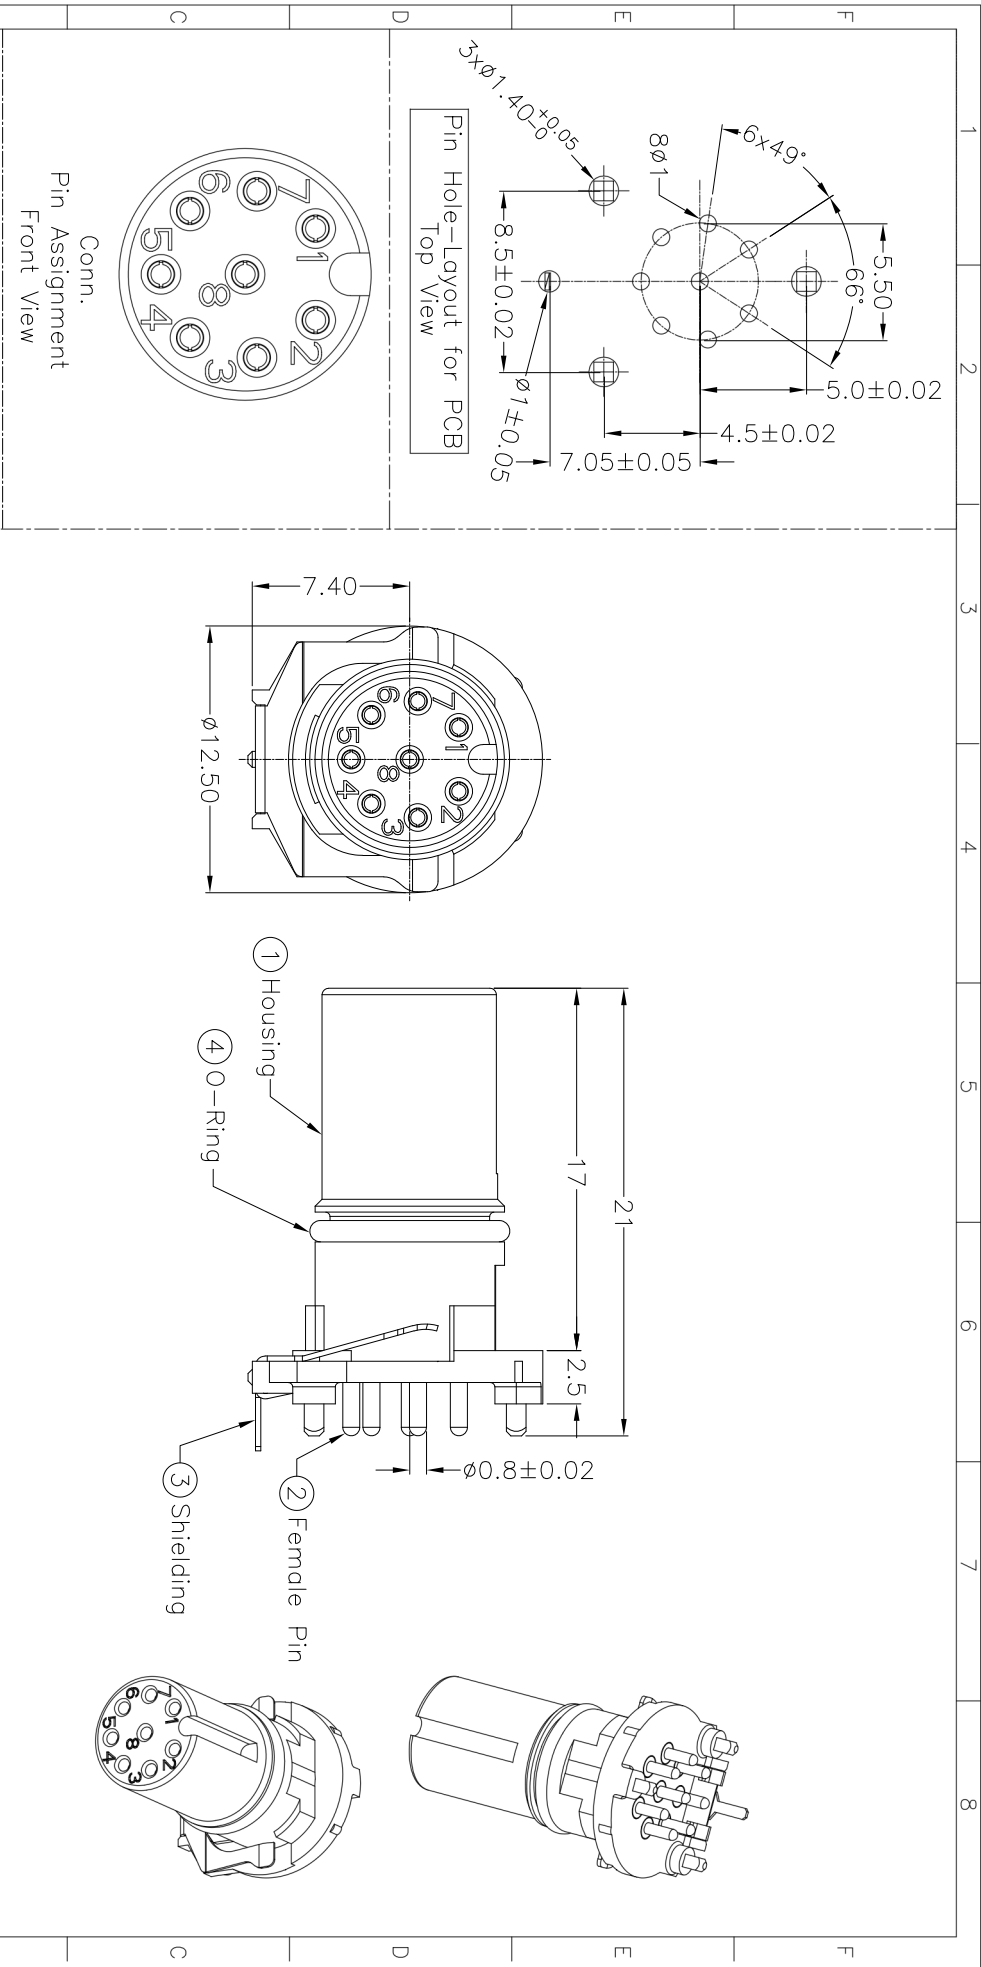


- Note:
- Material:
- ① Housing: Nylon+GF, Black.
 - ② Female Pin: Copper Alloy, Gold Plated.
 - ③ Shielding: Copper Alloy, Nickel Plated.
 - ④ O-Ring: Silicon, Gray.

Electrical Characteristics:

- * Current rating: 2A
- * Voltage rating: 30V a.c./d.c.

ElectronicLinks inc THIS DOCUMENT SHALL NOT BE REPRODUCED, NOR SHALL THE INFORMATION CONTAINED HEREIN BE USED OR DISCLOSED TO OTHERS EXCEPT AS AUTHORIZED IN WRITING BY ELECTRONIC LINKS INTERNATIONAL, INC.				ANGLES ± 0.2°	
DESIGNED BY: SDR		26/Feb/26		EDGE / CORNER BREAKS OUTSIDE MAX. 0.5 INSIDE MAX. 0.15	
CHECKED BY: XXX		DD/MM/YY		SIZE C REV LEVEL A	
APPROVED BY: XXX		DD/MM/YY		SCALE NONE SHEET 1	
PART NO. 12A08-00SX-LDS-02		TITLE: M12 8PIN FEMALE, STRAIGHT, SHIELDED, CONTACT INSERT ONLY		LINEAR X.X ±0.1 X.XX ±0.05 X.XXX ±0.025 X.XXXX ±0.0125	

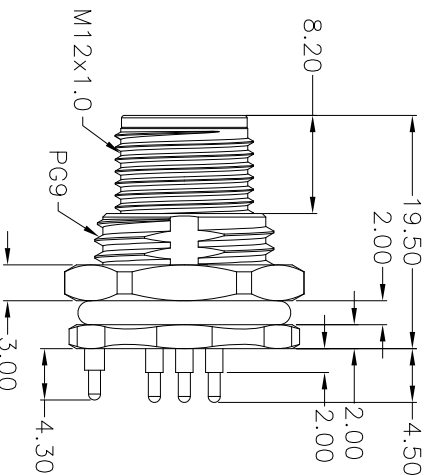

Material:

* Waterproof Rate: IP67

* Housing: Nylon+GF, Black.

* Male Pin: Copper Alloy, Gold Plated.

* Shield: Zinc Alloy, Nickel Plated.

- ② Screw Nut: Copper Alloy, Nickel Plated.
- ③ O-Ring: Silicone, Black.



Recommendation:

- * For Panel Thickness Max 4.5mm.
- * Nut Torque: 6-8 Kgf.cm.

Electrical Characteristics:

* Current rating: 2A

* Voltage rating: 30Va.c./d.c.




A*8:01.00±0.1
B*1:01.30±0.1

Pin hole-Layout for PCB

Top View

Pin Assignments

Front View



Panel Cut-out

Electronic Links
international inc

THIS DOCUMENT SHALL NOT BE REPRODUCED, NOR SHALL THE INFORMATION CONTAINED HEREIN BE USED OR DISCLOSED TO OTHERS EXCEPT AS AUTHORIZED IN WRITING BY ELECTRONIC LINKS INTERNATIONAL, INC.

DESIGNED BY:	SDR	02/Mar/26
--------------	-----	-----------

DATE:	1 / 1
CHECKED BY:	22 / 11 / 2022

XXX	DD/MM/YY
-----	----------


APPROVED BY: XXXX DD/MM/YY


		ANGLES ±		0.2°
EDGE/ CORNER BREAKS			OUTSIDE MAX.	0.5
			INSIDE MAX.	0.15
SIZE	REV LEVEL	LINEAR		
C	A	X X	±0.1	
		X XX	±0.05	
SCALE NONE	SHEET	X XXX	±0.025	
	1	X.XXXX	±0.0125	

TITLE:


M12 A-CODE 8PIN MALE

PANEL TYPR

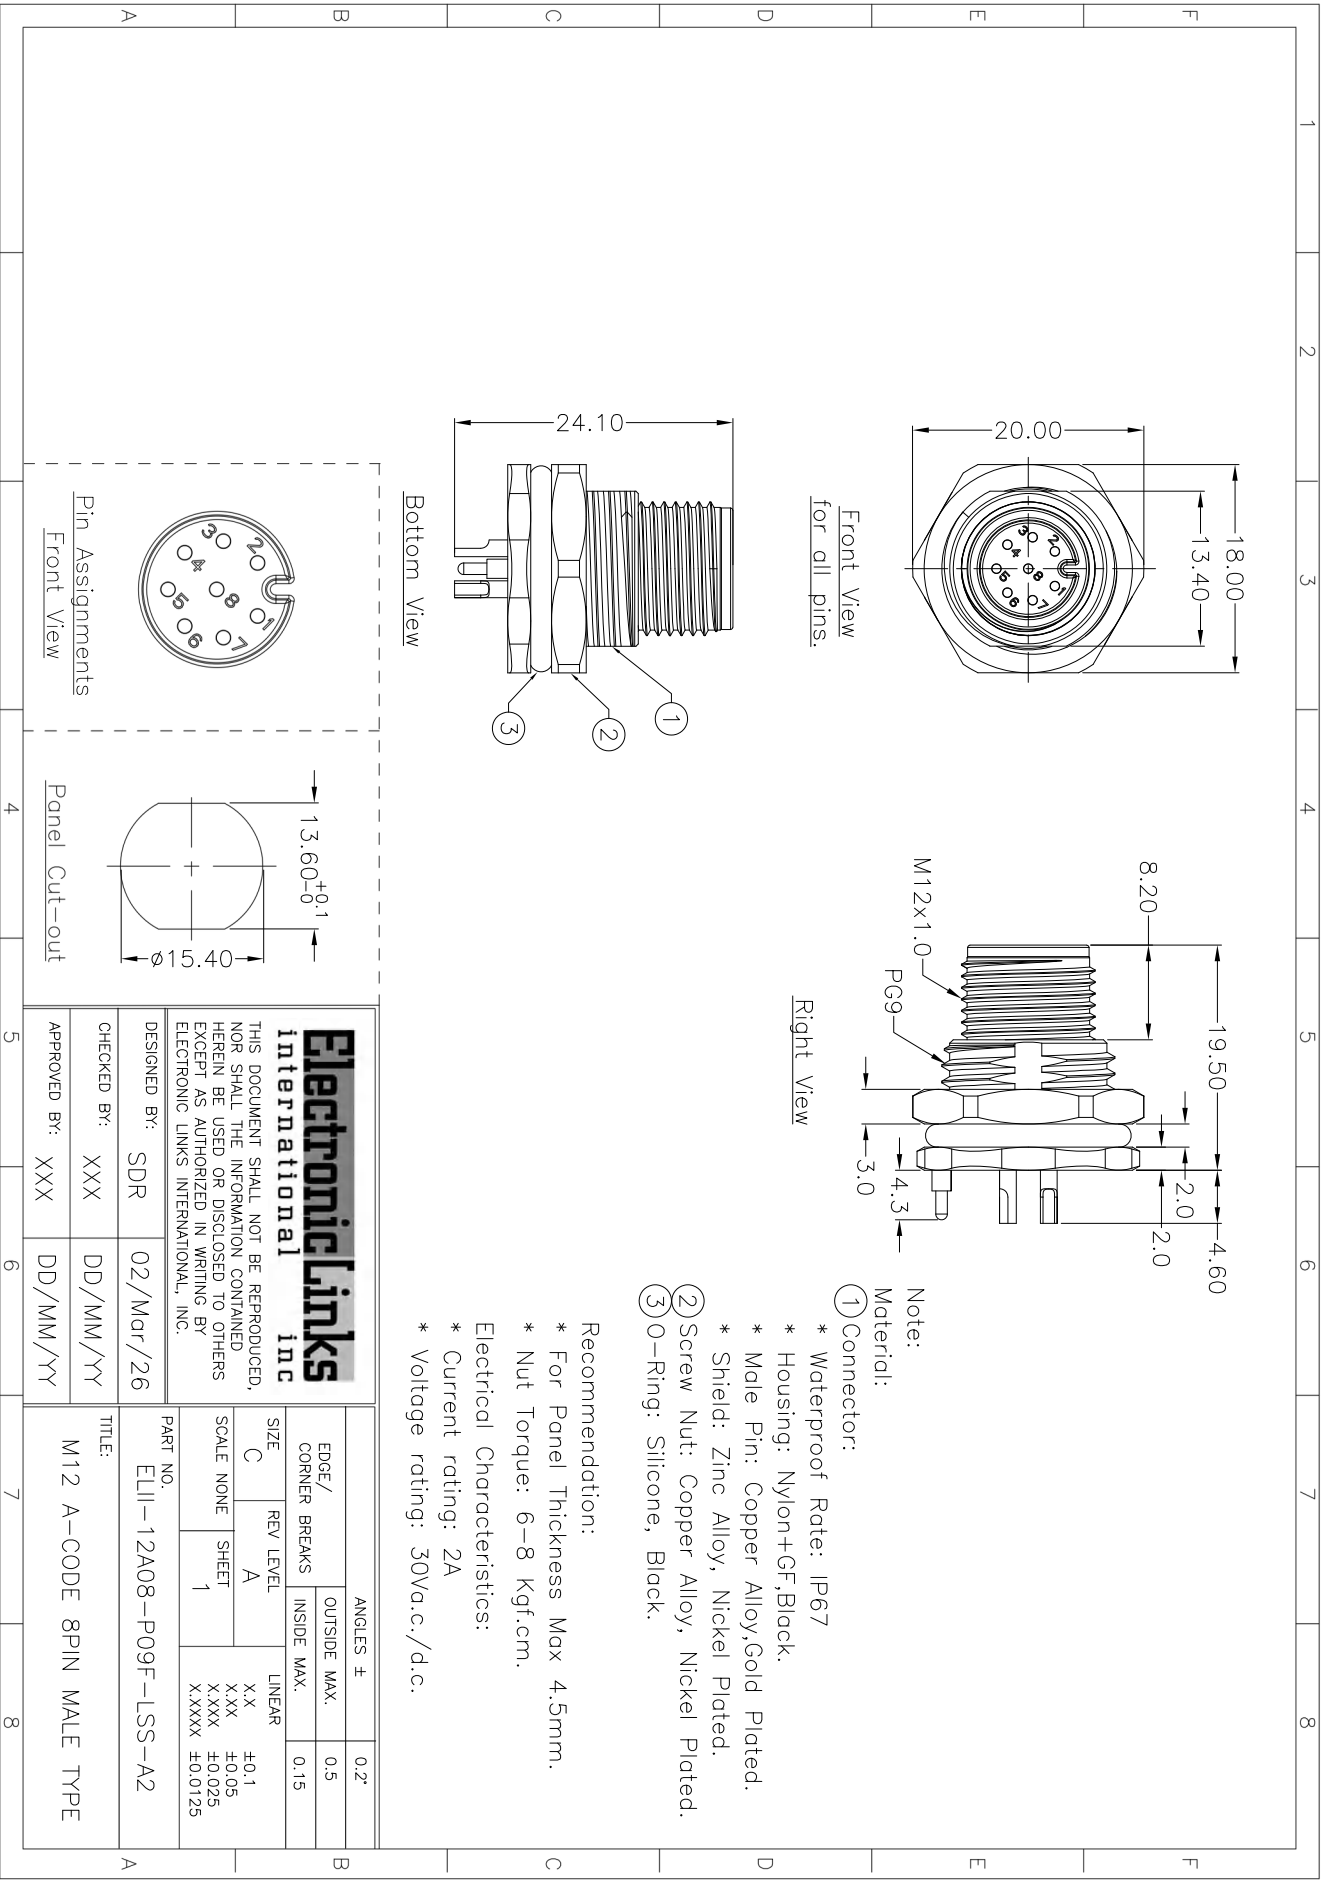



Front View
for all pins.

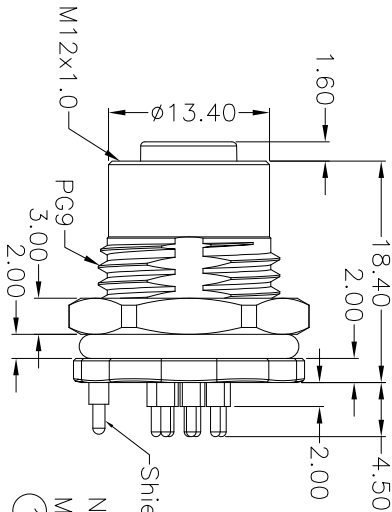

Right View

- Note:
- Material:
- ① Connector:
- * Waterproof Rate: IP67
 - * Housing: Nylon+GF,Black.
 - * Female Pin: Copper Alloy,Gold Plated.
 - * Shield: Zinc Alloy, Nickel Plated.


- * Screw Nut: Copper Alloy, Nickel Plated.
- ② O-Ring: Silicone, Black.
- ③ O-Ring: Silicone, Black.

Recommendation:


- * For Panel Thickness Max 4.5mm.
- * Nut Torque: 6-8 Kgf.cm.

Electrical Characteristics:


- * Current rating: 2A
- * Voltage rating: 30V a.c./d.c.

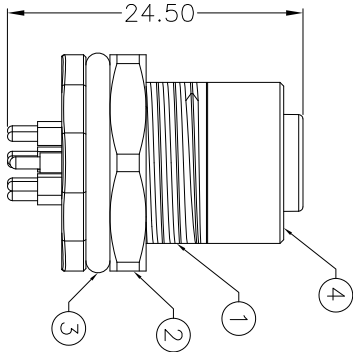


Bottom View



Pin hole—Layout for PCB
Top View



Pin Assignments
Front View



Panel Cut-out

ElectronicLinks
international inc

THIS DOCUMENT SHALL NOT BE REPRODUCED,
NOR SHALL THE INFORMATION CONTAINED
HEREIN BE USED OR DISCLOSED TO OTHERS
EXCEPT AS AUTHORIZED IN WRITING BY
ELECTRONIC LINKS INTERNATIONAL, INC.

DESIGNED BY: SDR 02/Mar/26


CHECKED BY: XXX DD/MM/YY

APPROVED BY: XXX DD/MM/YY


EDGE/ CORNER	ANGLES ±	
	OUTSIDE MAX.	0.2°
SIZE C	REV LEVEL	INSIDE MAX.
	A	0.15
SCALE	NONE	LINEAR
SHEET	1	X.XX ±0.1 X.XX ±0.05 X.XXX ±0.025 X.XXXX ±0.0125

PART NO. ELI-12A08-S09F-LDS-A2

TITLE: M12 A-CODE 8PIN FEMALE
PANEL TYPE



Front View
for all pins.

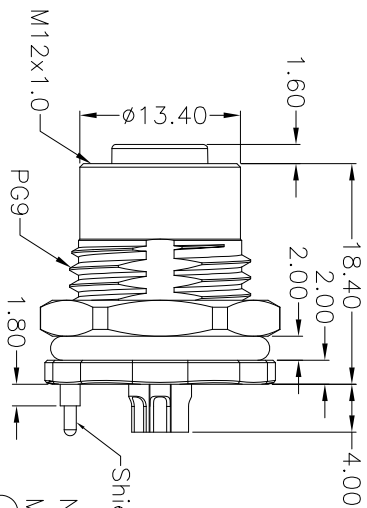


Right View


- Note:
Material:
① Connector:
* Waterproof Rate: IP67
* Housing: Nylon+GF, Black.
* Female Pin: Copper Alloy, Gold Plated.
* Shield: Zinc Alloy, Nickel Plated.

- ② Screw Nut: Copper Alloy, Nickel Plated.
③ O-Ring: Silicone, Black.
③ O-Ring: Silicone, Black.


- Recommendation:
* For Panel Thickness Max 4.5mm.
* Nut Torque: 6-8 Kgf.cm.
Electrical Characteristics:
* Current rating: 2A
* Voltage rating: 30V a.c./d.c.

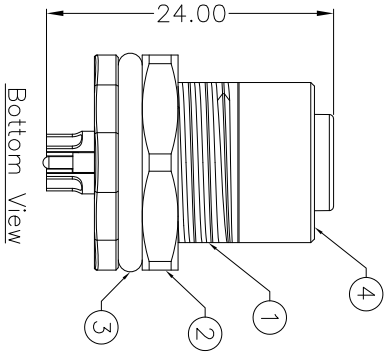

Bottom View



Pin Assignments
Front View






Panel Cut-out

ElectronicLinks inc
THIS DOCUMENT SHALL NOT BE REPRODUCED,
NOR SHALL THE INFORMATION CONTAINED
HEREIN BE USED OR DISCLOSED TO OTHERS
EXCEPT AS AUTHORIZED IN WRITING BY
ELECTRONIC LINKS INTERNATIONAL, INC.


DESIGNED BY:	SDR	02/Mar/26
CHECKED BY:	XXX	DD/MM/YY
APPROVED BY:	XXX	DD/MM/YY

ANGLES ±				0.2°
EDGE/ CORNER BREAKS		OUTSIDE MAX.		0.5
		INSIDE MAX.		0.15
SIZE	REV LEVEL	LINEAR		
C	A	±0.1 X.X X.XX		
SCALE NONE	SHEET	±0.05 X.XX X.XXX		
	1	±0.025 X.XXXX ±0.0125		
PART NO.				
ELI1-12A08-S09F-LSS-A2				
TITLE:				
M12 A-CODE 8PIN FEMALE				
PANEL TYPE				

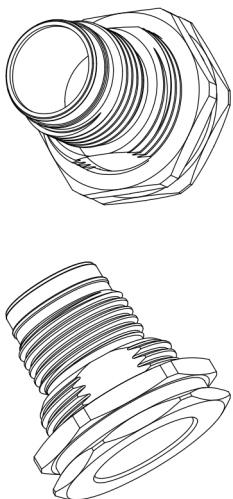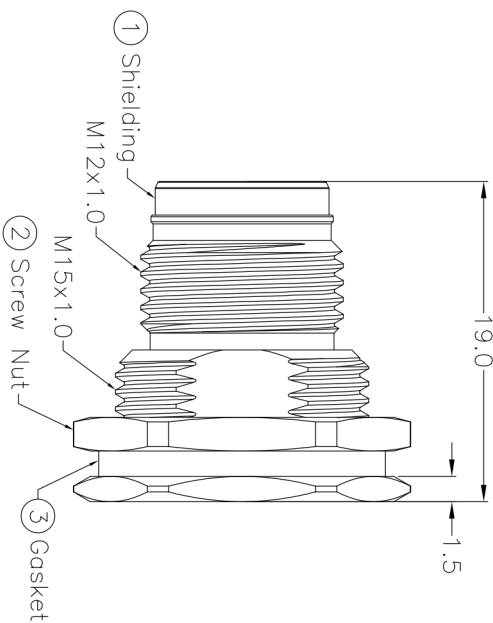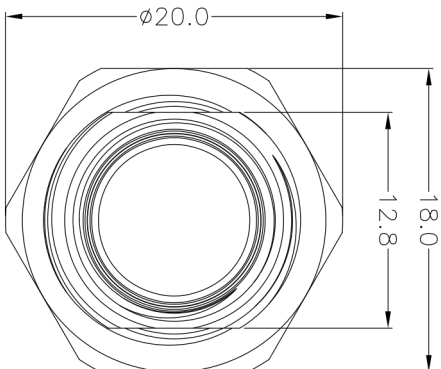




Note:
Material:
① Shielding: Copper Alloy, Nickel Plated.
② Screw Nut: Copper Alloy, Nickel Plated.
③ Gasket: Silicone, Black Grey.

Recommendation:
* For Panel Thickness Max 3.0mm.
* Nut Torque: 6–8 Kgf.cm.




ElectronicLinks inc THIS DOCUMENT SHALL NOT BE REPRODUCED, NOR SHALL THE INFORMATION CONTAINED HEREIN BE USED OR DISCLOSED TO OTHERS EXCEPT AS AUTHORIZED IN WRITING BY ELECTRONIC LINKS INTERNATIONAL, INC.			
DESIGNED BY:	SDR	02/Mar/26	PART NO. ELI-12000-P15F-P00-00
CHECKED BY:	XXX	DD/MM/YY	TITLE: M12 PUSH PULL MALE SHIELDING FOR FRONT MOUNT (M15x1)
APPROVED BY:	XXX	DD/MM/YY	

EDGES/ CORNER BREAKS		ANGLES ±	
OUTSIDE MAX.		0.5	
INSIDE MAX.		0.15	
SIZE	REV LEVEL	LINEAR	
C	A	X.X ±0.1	
SCALE NONE	SHEET 1	X.XX ±0.05	
		X.XXX ±0.025	
		X.XXXX ±0.0125	

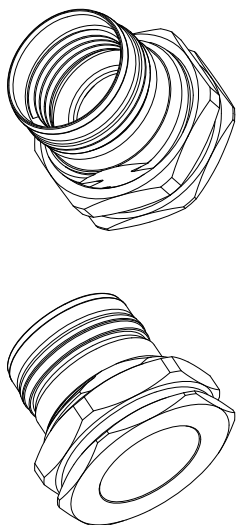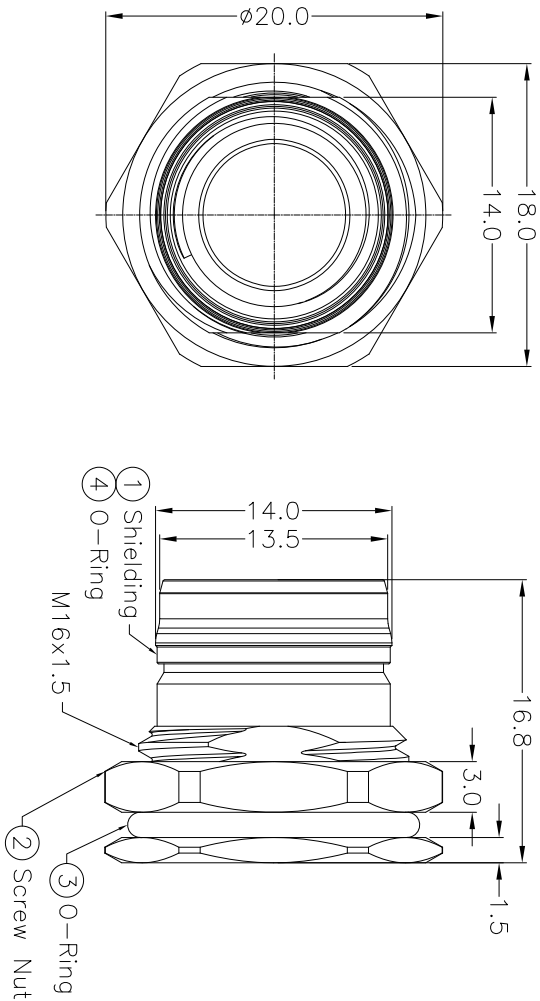

Note:
Material:
① Shielding: Copper Alloy, Nickel Plated.
② Screw Nut: Copper Alloy, Nickel Plated.
③ O-Ring: Silicone, Black Grey.
④ O-Ring: Silicone, Black Grey.






Recommendation:
* For Panel Thickness Max 2.0mm.
* Nut Torque: 6–8 Kgf.cm.



ElectronicLinks inc
THIS DOCUMENT SHALL NOT BE REPRODUCED, NOR SHALL THE INFORMATION CONTAINED HEREIN BE USED OR DISCLOSED TO OTHERS EXCEPT AS AUTHORIZED IN WRITING BY ELECTRONIC LINKS INTERNATIONAL, INC.

DESIGNED BY: SDR 02/Mar/26
CHECKED BY: XXX DD/MM/YY
APPROVED BY: XXX DD/MM/YY

EDGES/ CORNER BREAKS		ANGLES ±	
OUTSIDE MAX.		0.2°	
INSIDE MAX.		0.5	
SCALE NONE		0.15	
SHEET 1		LINEAR	
REV LEVEL A		±0.1	
X.XX		±0.05	
X.XXX		±0.025	
X.XXXX		±0.0125	
PART NO.		ELLI-12000-S16F-P00-00	
TITLE:		M12 PUSH PULL FEMALE SHIELDING FOR FRONT MOUNT (M16x1.5)	

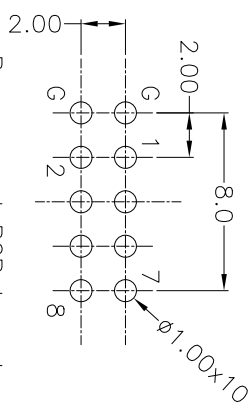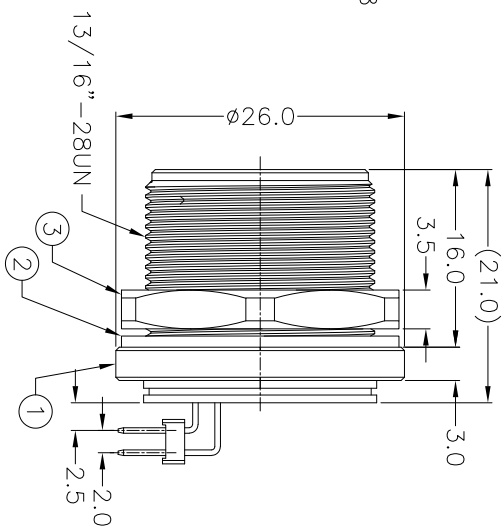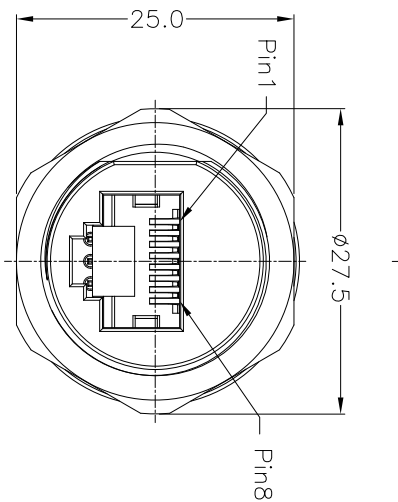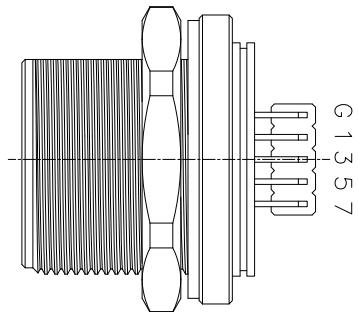

Note:

* IP Grade: IP67

①* RJ45 Jack Panel Connector

Housing: Nylon+GF, Black

Terminal: Copper Alloy, Gold Plated

Shielding: Zinc Alloy, Nickel Plated

Ground: Copper Alloy, Tin Plated

* Screw Nut: Copper Alloy, Nickel Plated

③* Gasket: Silicone, Grey


* Recommendation:

For Panel Thickness Max.: 4mm

Nut Torque: 8~12kgf.cm

* Electrical Characteristics:

Rated current: 1.5A



Electronic Links
international inc

THIS DOCUMENT SHALL NOT BE REPRODUCED,
NOR SHALL THE INFORMATION CONTAINED
HEREIN BE USED OR DISCLOSED TO OTHERS
EXCEPT AS AUTHORIZED IN WRITING BY
ELECTRONIC LINKS INTERNATIONAL, INC.

DESIGNED BY: SDR 04/Mar/26

CHECKED BY: XXX DD/MM/YY

APPROVED BY: XXX DD/MM/YY

Recommend PCB Layout
Top View Scale/2:1

		ANGLES ±	0.2°
EDGE/ CORNER BREAKS	OUTSIDE MAX.		0.5
	INSIDE MAX.		0.15
SIZE	REV LEVEL	LINEAR	
C	A	X.X	±0.1
		X.XX	±0.05
SCALE NONE	SHEET 1	X.XXX	±0.025
		X.XXXXX	±0.0125

TITLE:

RJ45	JACK	PANEL	DIP	TYPE
	R/A	DIP	TYPE	

Editor's Contact:

Francesco Liburdi

Tel. USA: +1 607.761.9952

Tel. Italy: + 39.348.6578677

Tel. Taiwan: + 886 9083 112860

fliburdi@electronic-links.com

M12-A code 8: PCB & solder cup male & female, shielded and unshielded. R/A and straight, shielded are with screw locking and push pull locking
RJ45 : PCB female



DESCRIPTION

Female straight (insert)

Male straight (insert)

Male r/a pcb (insert)

Female r/a pcb (insert)

Male straight pcb

Female straight pcb

Male solder cup

Female solder cup

Female straight pcb RJ45

Female r/a pcb RJ45

Male shield shell for male insert

Female shield shell for female insert

PART NUMBER

ELII-12A08-00SX-LDS-02

ELII-12A08-00PX-LDS-02

ELII-12A08-00PX-RDS-01

ELII-12A08-00SX-RDS-01

ELII-12A08-P09F-LDS-A2

ELII-12A08-S09F-LDS-A2

ELII-12A08-P09F-LSS-A2

ELII-12A08-S09F-LSS-A2

ELII-RJM08-SLD-NL

ELII-RJM08-SRD-NL

ELII-12000-P15F-P00-00

ELII-12000-S16F-P00-00

OTHER CONFIGURATIONS AVAILABLE, CONTACT sales@electronic-links.com


Electronic Links International, Inc. assumes no responsibility for inaccuracies or omissions in the information contained in this document. Specifications are subject to change without notice. Additional information about Electronic Links International, Inc. is available at www.electronic-links.com




One-Pieces

Front Mount (Solder)



Male

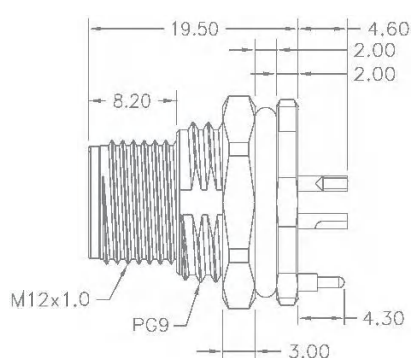



Female

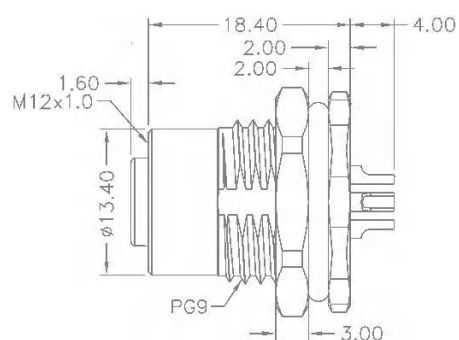


Front Mount (Dip)

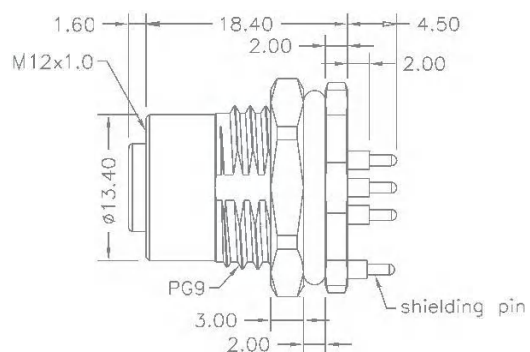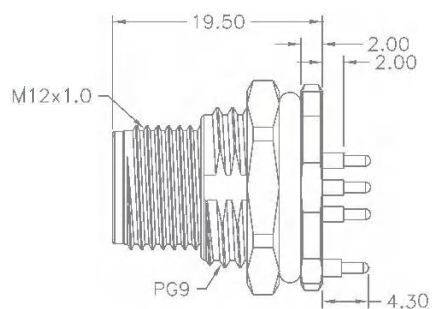


Rear Mount (Solder)

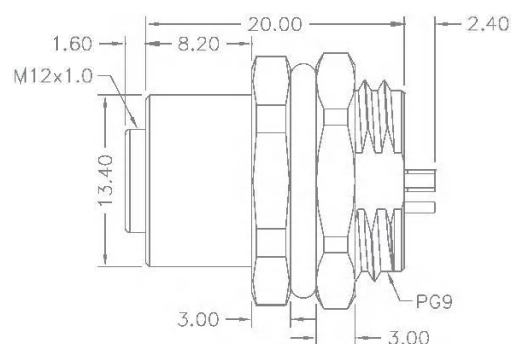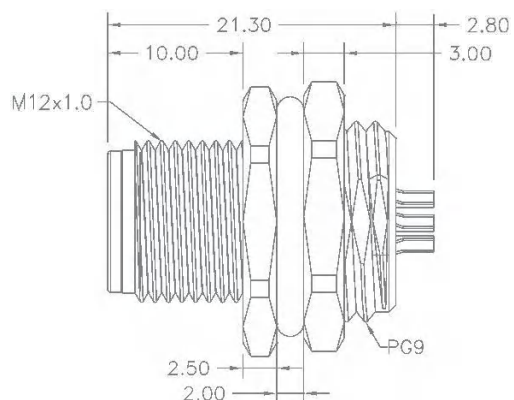

One-Pieces

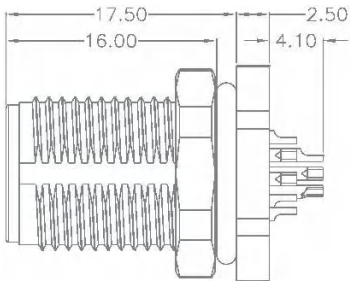

Panel Cut-Out






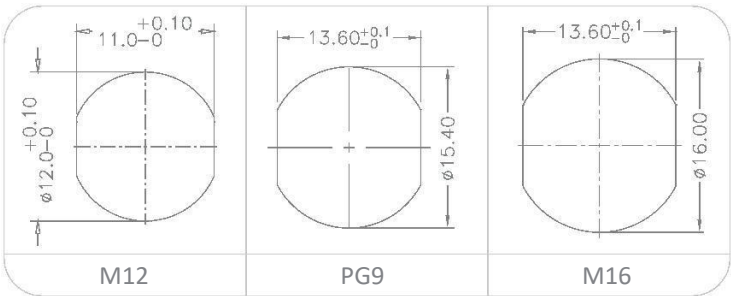










Technical Characteristics

- Shell material : Brass / Zinc
 - Housing material : Nylon PA66
 - Molding material : PVC / TPU
 - Contact : Copper Alloy
 - Applicable temperature : -20°C~+80°C
- Insulation resistance : ≥100mΩ
 - Contact resistance : ≤5mΩ
 - Protection level : IP67
 - Mating and Unmating force : ≥500

Electrical Features

Female Key View						
Male Key View						
Code Type	A-Code					
Pin Way	3PIN	4PIN	5PIN	8PIN	12PIN	17PIN
Rated Current	4A			2A	1.5A	
Rated Voltage	250V a.c./d.c.		60V a.c./d.c.	30V a.c./d.c.		

Female Key View				
Male Key View				
Code Type	B-Code	D-Code	X-Code	Y-Code
Pin Way	5PIN	4PIN	8PIN	8PIN
Rated Current	4A		0.5A	6A/0.5A
Rated Voltage	60V a.c./d.c.	250V a.c./d.c.	60V a.c./d.c.	50V a.c./d.c.


Female Key View				
Male Key View				
Code Type	S-Code	T-Code	K-Code	L-Code
Pin Way	4PIN	4PIN	5PIN	5PIN
Rated Current	12A	4A	12A	12A
Rated Voltage	630V a.c./d.c.	63V a.c./d.c.	630V a.c./d.c.	63V a.c./d.c.

ElectronicLinks international inc




Technical Characteristics

- Shell material : Brass / Zinc / PA66
- Housing material : Nylon PA66
- Molding material : PVC / TPU
- Contact : Copper Alloy
- Insulation resistance: DC500V $\pm$ 10%
- Current Rating: 1.5A
- Recommend AWG: 24~26AWG
- Protection level: IP67
- Panel Mount Connector: 40°C~+105°C
- Cable End Connector: 40°C~+85°C

PANEL CUT – OUT



PANEL SIGNAL



www.electronic-links.com

Editor's Contact:

Francesco Liburdi

Tel. USA: +1 607.761.9952


Tel. Italy: + 39.348.6578677

Tel. Taiwan: + 886 9083 112860

fliburdi@electronic-links.com

IP67, RJ45, panel-mount metal PCB connector (with a sealed mating cable) is typically used anywhere standard Ethernet is needed but the environment is wet, dusty, or rough: industrial automation & robotics, outdoor networking, transportation, security & surveillance, etc.


- **IP67 RJ45 FEMALE PANEL MOUNT METAL WITH STRAIGHT TAILS PCB**
P/N: ELII-RJM08-C20F-SLD-00
- **IP67 RJ45 MALE METAL MATING TO ELII-RJM08-C20F-SLD-00**
P/N: ELII-RJM00-SASP-S00
- **IP67 METAL CUP FOR THE FEMALE PANEL MOUNT CONNECTOR**
P/N: ELII-CAPS0-CCXM-RC0-00

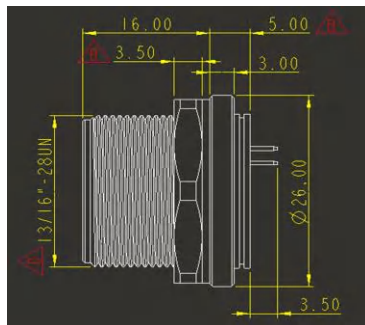


ELII-RJM08-C20F-SLD-00



ELII-CAPS0-CCXM-RC0-00

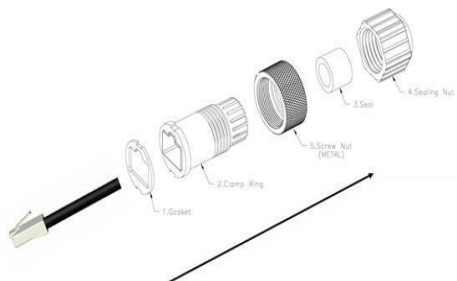


ELII-RJM00-SASP-S00

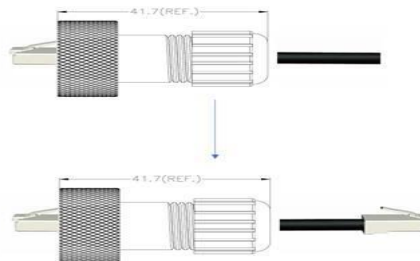

Electronic Links International, Inc. assumes no responsibility for inaccuracies or omissions in the information contained in this document. Specifications are subject to change without notice. Additional information about Electronic Links International, Inc. is available at www.electronic-links.com


ELII-FHDCR-K2001F

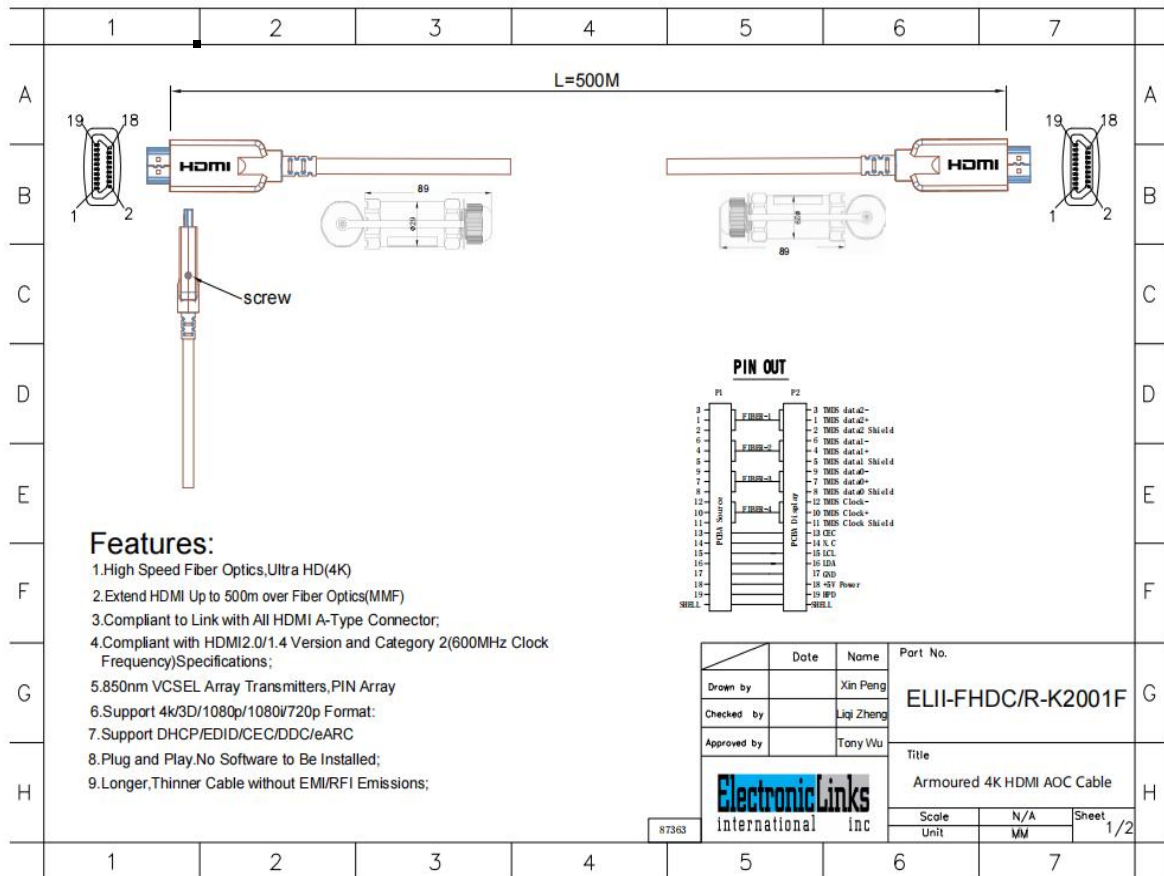


ELII-FHDCR-K2001F

	1	2	3	4	5	6	7																	
A								A																
B								B																
C								C																
D								D																
E	Carton Details <table border="1"> <thead> <tr> <th>P/N</th><th>Cable Length</th><th>Quantity (Carton)</th><th>Measurement (Carton)</th><th>N.W. (Carton)</th><th>G.W. (Carton)</th></tr> </thead> <tbody> <tr> <td>PCD380</td><td>300M</td><td>1PC</td><td>400*310*510mm</td><td>23.8kg</td><td>24.3kg</td></tr> </tbody> </table>							P/N	Cable Length	Quantity (Carton)	Measurement (Carton)	N.W. (Carton)	G.W. (Carton)	PCD380	300M	1PC	400*310*510mm	23.8kg	24.3kg	E				
P/N	Cable Length	Quantity (Carton)	Measurement (Carton)	N.W. (Carton)	G.W. (Carton)																			
PCD380	300M	1PC	400*310*510mm	23.8kg	24.3kg																			
F								F																
G	<table border="1"> <thead> <tr> <th></th><th>Date</th><th>Name</th></tr> </thead> <tbody> <tr> <td>Drawn by</td><td></td><td>Xin Peng</td></tr> <tr> <td>Checked by</td><td></td><td>Liqi Zheng</td></tr> <tr> <td>Approved by</td><td></td><td>Tony Wu</td></tr> </tbody> </table>						Date	Name	Drawn by		Xin Peng	Checked by		Liqi Zheng	Approved by		Tony Wu	<table border="1"> <thead> <tr> <th colspan="2">Part No.</th></tr> </thead> <tbody> <tr> <td colspan="2">ELII-FHDCR-K2001F</td></tr> </tbody> </table>		Part No.		ELII-FHDCR-K2001F		G
	Date	Name																						
Drawn by		Xin Peng																						
Checked by		Liqi Zheng																						
Approved by		Tony Wu																						
Part No.																								
ELII-FHDCR-K2001F																								
H						<table border="1"> <thead> <tr> <th colspan="3">Title</th></tr> </thead> <tbody> <tr> <td colspan="3">Armoured 4K HDMI AOC Cable</td></tr> </tbody> </table>		Title			Armoured 4K HDMI AOC Cable			H										
Title																								
Armoured 4K HDMI AOC Cable																								
	1	2	3	4	5	6	7																	

ELII-FHDC-R-K2101F

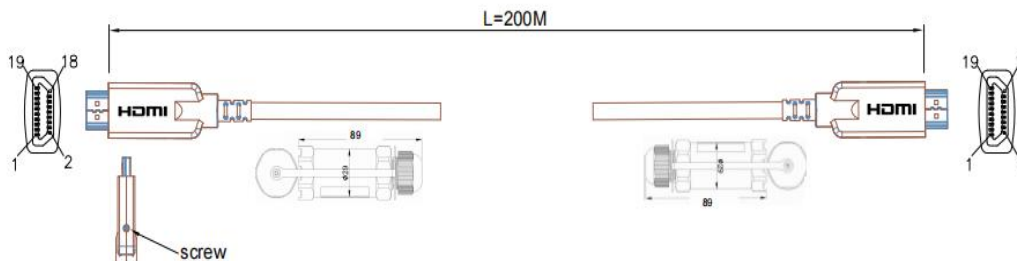	1	2	3	4	5	6	7															
A								A														
B								B														
C								C														
D								D														
E								E														
F	Features: 1.High Speed Fiber Optics,Ultra HD(8K) 2.Extend HDMI Up to 200m over Fiber Optics(MMF) 3.Compliant to Link with All HDMI A-Type Connector; 4.Compliant with HDMI2.0/2.1 Version and Category 2(600MHz Clock Frequency)Specifications; 5.850nm VCSEL Array Transmitters,PIN Array 6.Support 8k/4k/3D/1080p/1080i/720p Format: 7.Support DHCP/EDID/CEC/DDC/eARC 8.Plug and Play.No Software to Be Installed; 9.Longer,Thinner Cable without EMI/RFI Emissions;							F														
G	<table border="1"><thead><tr><th></th><th>Date</th><th>Name</th><th>Part No.</th></tr></thead><tbody><tr><td>Drawn by</td><td></td><td>Xin Peng</td><td rowspan="3">ELII-FHDC/R-K2101F</td></tr><tr><td>Checked by</td><td></td><td>Liqi Zheng</td></tr><tr><td>Approved by</td><td></td><td>Tony Wu</td></tr></tbody></table>								Date	Name	Part No.	Drawn by		Xin Peng	ELII-FHDC/R-K2101F	Checked by		Liqi Zheng	Approved by		Tony Wu	G
	Date	Name	Part No.																			
Drawn by		Xin Peng	ELII-FHDC/R-K2101F																			
Checked by		Liqi Zheng																				
Approved by		Tony Wu																				
H	<table border="1"><thead><tr><th colspan="2">Title</th></tr></thead><tbody><tr><td colspan="2">Armoured 8K HDMI AOC Cable</td></tr><tr><td>Scale</td><td>N/A</td></tr><tr><td>Unit</td><td>MM</td></tr><tr><td>Sheet</td><td>1/2</td></tr></tbody></table>							Title		Armoured 8K HDMI AOC Cable		Scale	N/A	Unit	MM	Sheet	1/2	H				
Title																						
Armoured 8K HDMI AOC Cable																						
Scale	N/A																					
Unit	MM																					
Sheet	1/2																					
	1	2	3	4	5	6	7															

SPECIFICATION: (2C*30#+DA)+3C*28#+2C*24#+Optical Fibber x 4C+FILLER+Armored					CONSTRUCTION D.W.G	
ITEM		SPECIFICATION				
CONDUCTOR	AWG	30AWG	28AWG	24AWG		
	MATERIAL	TINNED COPPER	TINNED COPPER	TINNED COPPER		
	COND.SIZE	7/0.10 mm	7/0.127 mm	7/0.20 mm		
INSULATION	MIN.AVG.THICK	0.45 mm	0.10 mm	0.15 mm		
	MATERIAL	FM-PE	PP	PP		
	O. D	1.30±0.05 mm	0.62±0.05 mm	0.90±0.05 mm		
DRAIN	N.O.	2C	3C	2C	COLOUR CODE: 2C+DA : 1. pink 2. white 3C : 1. yellow 2. orange 3. blue 2C : 1. black 2. red	
	MATERIAL	TINNED COPPER				
ALMYLAR	SIZE	7/0.10 mm				
	COVERAGE	100%				
ALMYLAR	OVERLAP	25% MIN				
	Cond. Size	OM3/150				
Glass Optical	Diameter	1.0±0.05 mm				
	Color of jacket	WHITE				
ALMYLAR	N.O.	4C				
	COVERAGE	100%				
ALMYLAR	OVERLAP	25% MIN				
	MIN.AVG.THICK	0.40 mm				
JACKET	MATERIAL	TPU/60P				
	COLOUR	GREY				
JACKET	O. D	6.00±0.15 mm				
					MARKING	
					REMARK	
					ElectronicLinks international inc	
ELECTRICAL CHARACTERISTICS					PHYSICAL PROPERTIES	
1.Rating: Temp 80°C 2. Conductor Resistance: at 20°C MAX 30AWG: 381Ω/km; 28AWG: 239Ω/km; 24AWG: 94.2Ω/km; 3. Insulation Resistance: 10MΩ/Km min at 20°C					PART NO. ELII-FHDC/R-K2101F	
					APPROVED	Tony Wu
					CHECKED	Liqi Zheng
					DRAWING	Xin Peng
					CUSTOMER	
					REV	A/0
					DATE	2020/11/23

ELII-FHDR-K210F

	1	2	3	4	5	6	7																					
A								A																				
B								B																				
C								C																				
D								D																				
E	Carton Details <table border="1"><thead><tr><th>P/N</th><th>Cable Length</th><th>Quantity (Carton)</th><th>Measurement (Carton)</th><th>N.W. (Carton)</th><th>G.W. (Carton)</th></tr></thead><tbody><tr><td>PCD380</td><td>200M</td><td>1pcs</td><td>400*310*510mm</td><td>15.8kg</td><td>16.2kg</td></tr></tbody></table>							P/N	Cable Length	Quantity (Carton)	Measurement (Carton)	N.W. (Carton)	G.W. (Carton)	PCD380	200M	1pcs	400*310*510mm	15.8kg	16.2kg	E								
P/N	Cable Length	Quantity (Carton)	Measurement (Carton)	N.W. (Carton)	G.W. (Carton)																							
PCD380	200M	1pcs	400*310*510mm	15.8kg	16.2kg																							
F	<table border="1"><thead><tr><th>Date</th><th>Name</th><th>Part No.</th></tr></thead><tbody><tr><td></td><td>Xin Peng</td><td>ELII-FHDR-K2101F</td></tr><tr><td></td><td>Liqi Zheng</td><td></td></tr><tr><td></td><td>Tony Wu</td><td></td></tr></tbody></table>  87363 <table border="1"><thead><tr><th colspan="2">Title</th></tr></thead><tbody><tr><td colspan="2">Armoured 8K HDMI AOC Cable</td></tr><tr><td>Scale Unit</td><td>N/A MM</td></tr><tr><td colspan="2">Sheet 2/2</td></tr></tbody></table>							Date	Name	Part No.		Xin Peng	ELII-FHDR-K2101F		Liqi Zheng			Tony Wu		Title		Armoured 8K HDMI AOC Cable		Scale Unit	N/A MM	Sheet 2/2		F
Date								Name	Part No.																			
								Xin Peng	ELII-FHDR-K2101F																			
	Liqi Zheng																											
	Tony Wu																											
Title																												
Armoured 8K HDMI AOC Cable																												
Scale Unit	N/A MM																											
Sheet 2/2																												
G	G																											
H	<table border="1"><thead><tr><th colspan="2">Title</th></tr></thead><tbody><tr><td colspan="2">Armoured 8K HDMI AOC Cable</td></tr><tr><td>Scale Unit</td><td>N/A MM</td></tr><tr><td colspan="2">Sheet 2/2</td></tr></tbody></table>							Title		Armoured 8K HDMI AOC Cable		Scale Unit	N/A MM	Sheet 2/2		H												
Title																												
Armoured 8K HDMI AOC Cable																												
Scale Unit	N/A MM																											
Sheet 2/2																												
	1	2	3	4	5	6	7																					

MIL-DTL-38999 to RJ45 Shell size 15 with logo

ElectronicLinks
international inc



Editor's Contact:

Francesco Liburdi

Tel. USA: +1 607.761.9952

Tel. Italy: + 39.348.6578677

Tel. Taiwan: +886.0983112860

fliburdi@electronic-links.com

SMI SOLUTIONS USING PLASTIC OPTICAL CABLE (POF)

GENERAL OFFERING

1. In accordance with IEEE 1394b-2002 and IEC 61754-21 standard
2. Speed to 200 MBd
3. Distance to 100 meters
4. RoHS
5. Socket: thru hole and SMT
6. Adapter
7. Cable Plug to Plug, and Plug to open



TYPICAL APPLICATIONS:

1. Automation
2. Industrial
3. Medical
4. Avionics
5. Home networking

Electronic Links International, Inc. assumes no responsibility for inaccuracies or omissions in the information contained in this document. Specifications are subject to change without notice. Additional information about Electronic Links International, Inc. is available at www.electronic-links.com


Long Haul Cable Solution

ElectronicLinks
international inc

Long haul cables connect two distant devices. To enable machine vision more widely adapted to the on-site conditions.

Long Haul Cables Apply Widely in Different Scenarios

- ▶ Machine vision detection equipment setting for automatic factory
- ▶ Centralized control room
- ▶ Big size monitor / parts inspection
- ▶ Hawk-eye in large sports field
- ▶ Handheld device for bug size parts inspection
- ▶ Large smart agricultural machinery
- ▶ Sites require customized long distance cable setting



E.L.I.I. Provides a Complete Range of Long Haul Cables for Devices with Different Interfaces



1. GigE 、CoaXpress Cables

In general, high-quality GigE or CoaXpress cables can support long haul solutions. E.L.I.I. GigE solution is up 80 meters, CXP-6 is up to 40 meters, and CXP-12 is up to 30 meters.

2. USB Active Cable: ACC, AOC

USB cables optimize the signal through repeater to extend the transmission distance. E.L.I.I. USB ACC is up to 15 meters, USB AOC is up to 30 meters.

more information please refer to:
electronic-links.com




Long Haul Cable Solution


ElectronicLinks
international inc

Principles for Long Haul Cable Solution

1. Conductor 's gauge and cable structure affect the signal attenuation degree

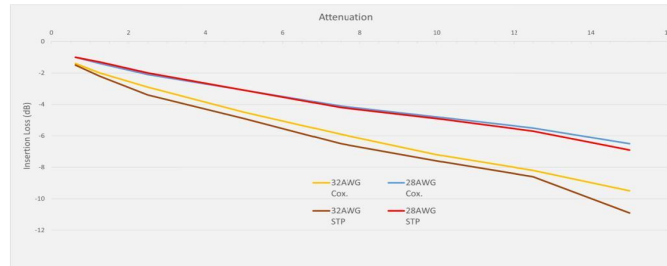

2. Chip architecture affects the quality of long distance transmission signal

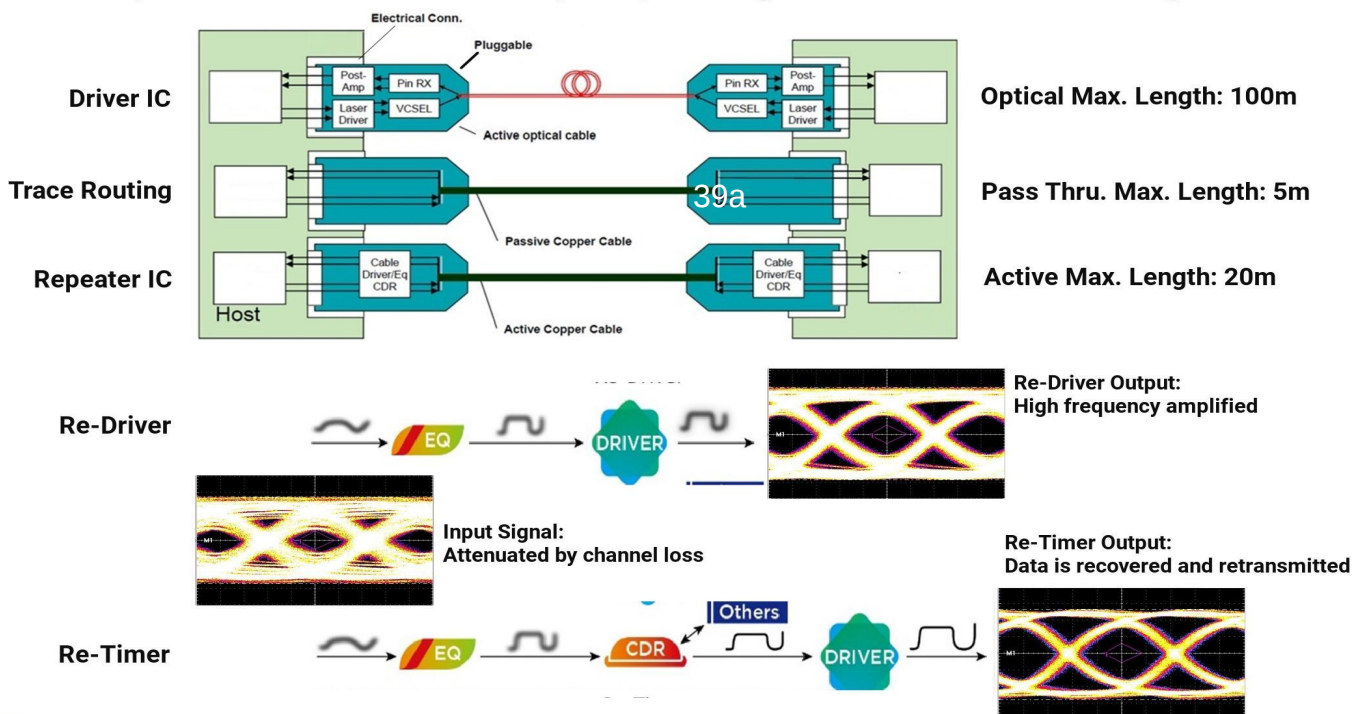

E.L.I.I. Long Haul Cables Advantages

- ▶ Complete range of product lines for one-stop solution.
- ▶ Our R&D team has capability to design circuit boards and provides customized solutions.
- ▶ Products can be applied in industrial environment.
- ▶ Cables transmission is stable and does not attenuate due to length.
- ▶ All products are 100% tested before shipment to provide guaranteed quality.

more information please refer to:
electronic-links.com



ElectronicLinks

international inc



...connecting...